

Audio

NEUTRIK

Deutsche Version

Home

About Us

Products

Support

. . .

News

Sitemap


Search

Products only

© Neutrik® AG All rights reserved Legal Notices



Jack with special designed head for guitar strap, for thick panels, 3-pole, long-threaded bushing with washer and nut, full metal

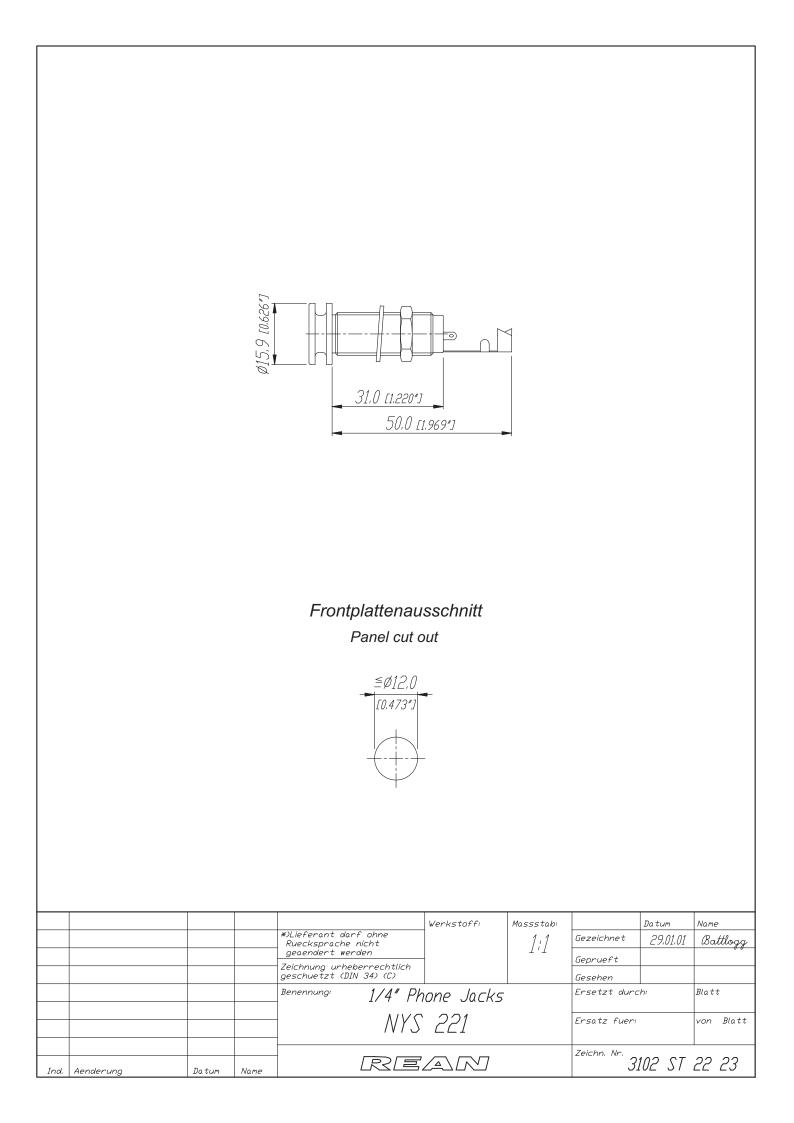





NYS221

There are no technical infos for this product.

Product	
Electrical	
Contact resistance	< 10 mΩ
Dielectric strength	0,5 kVdc
Rated current per contact	1 A
Mechanical	
Cable O.D.	≤ 6 mm
Insertion force	≤ 20 N
Withdrawal force	> 10 N
Lifetime	5000 mating cycles
Panel thickness	26 mm
Wire size	24 AWG
Material	
Contact plating	SnCe
Contacts	CuSn6
Insert	PA 6+insulation board
Shell	CuZn39Pb3 gal 2 ?m Ni plated
Environmental	
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +70 °C
Optical	
Mobile Cables	