
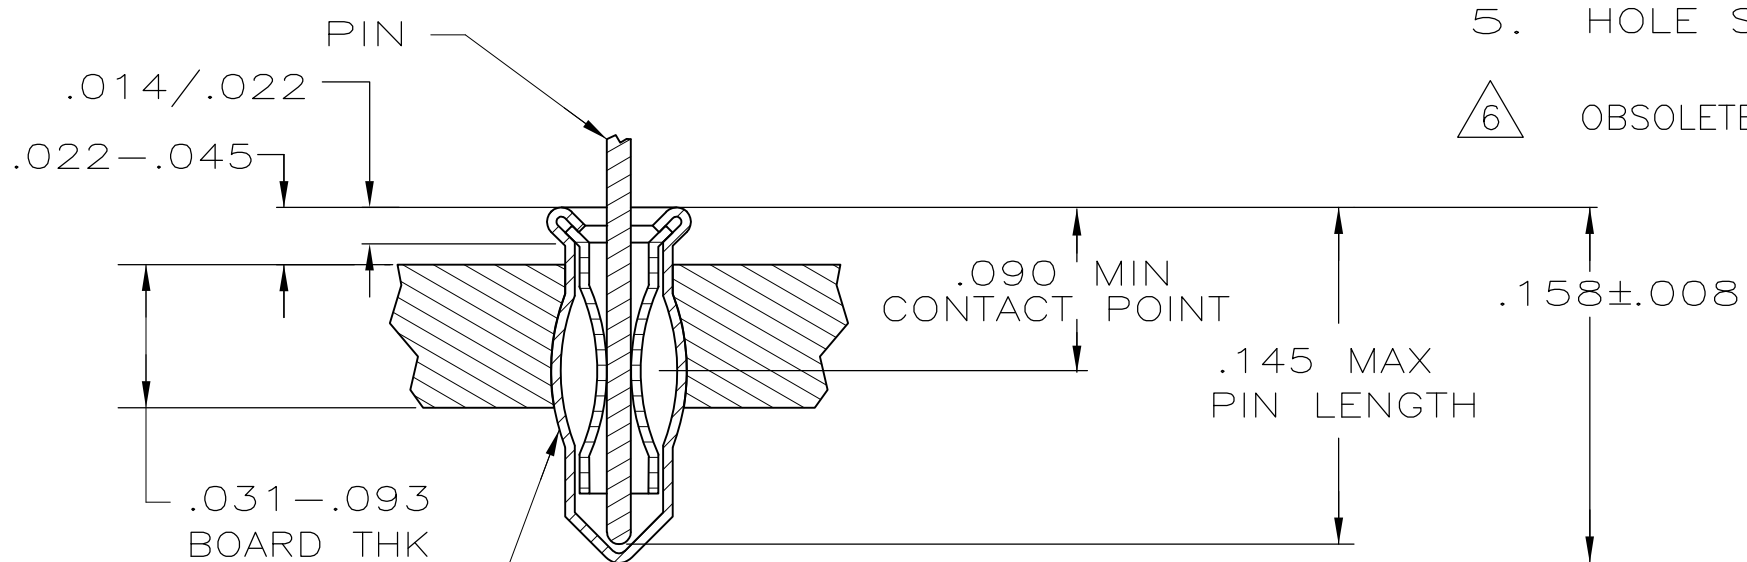


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53		A	REVISED PER ECO-06-001742	31JAN06	JDP	JGH
			A1	REVISED PER ECO-09-024606	03NOV09	KK	AEG

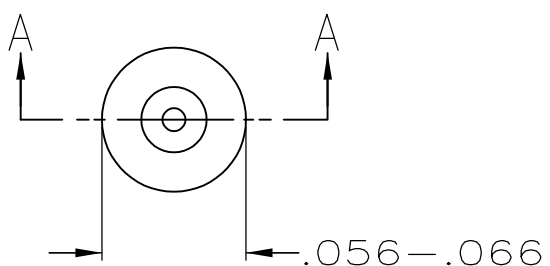

INSERTION MACHINE CAPABLE OF OVALIZING SOCKET FOR RETENTION IN PC BOARD WITH .042±.003 DIA HOLE PRIOR TO SOLDERING OPERATION

SECTION A-A

- MATERIAL:
 EYELET - COPPER PER ASTM B 152
 SPRING - BERYLLIUM COPPER PER ASTM B 194
- TIN PLATE PER ASTM-B-545 .000100 MIN THICK
- GOLD PLATE PER ASTM B 488 .000030 MIN THICK ON CONTACT AREA.
- TO INSURE 1/2 OZ MIN RETENTION DO NOT EXCEED .004 DIFFERENCE IN PIN DIA WHEN CHANGING TO A SMALLER DIA PIN
- HOLE SIZE FOR HAND INSERTION 0.043-0.046
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

.090-.145	.012-.018	GOLD $\Delta 3$	TIN $\Delta 2$	$\Delta 6$ 5645945-5- 5645945-2 5645945-1
	.015-.021	TIN $\Delta 2$		
LENGTH	DIA $\Delta 3$	SPRING	EYELET	PART NO
PIN		FINISH		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - 20APR2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES		CHK J. HAVENER 20APR2005	NAME MINIATURE SPRING SOCKET ASSEMBLY SERIES 1 SHORT		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. HAVENER 20APR2005	PRODUCT SPEC 108-14008		
0 PLC ± -		MATERIAL NOTE 1	APPLICATION SPEC 114-13152		
1 PLC ± -			WEIGHT -		
2 PLC ± -			SIZE A3		
3 PLC ± -			CAGE CODE 00779		
4 PLC ± -		DRAWING NO G-5645945			
ANGLES ± -		RESTRICTED TO -			
FINISH SEE TABLE		SCALE NTS			
		SHEET 1 OF 1			
		REV A1			