

## Data sheet

734-110/037-000

**FEMALE PLUG WITH LOCKING LEVER**  
**PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH**  
**CODIG FINGERS**



## Technical data

Package size 50 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	10
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage UL	250 V
Voltage CSA	300 V
Current UL	10 A
Current CSA	10 A
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	8.137 g
Color	light grey
No. of connection Points	10
No. of potentials	10
Height	13.4 mm
Height	0.528 in
Width	46.8 mm
Width	1.843 in

---

## Data sheet

734-110/037-000

**FEMALE PLUG WITH LOCKING LEVER  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CODIG FINGERS**

---

Depth	18.6 mm
Depth	0.732 in
Strip length from	7 mm
Strip length to	7 mm
Strip length	0.28 in
xxx-xxx/034-000	Strain relief plate 25 mm

---

**Data sheet****734-110/037-000****FEMALE PLUG WITH LOCKING LEVER  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CODIG FINGERS**

---

Approval	Voltage	Current	Approval number	Notes
CCA	250	10	123898-02	
CCA	250	10	NL5641	
CSA	300	10	154112-1465035	
KEMA	250	10	2077592.02	
UL	300	10	154112-1465035	
UL	250	10	E45171	

---

## Data sheet

734-110/037-000

**FEMALE PLUG WITH LOCKING LEVER  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CODIG FINGERS**

---

## Accessories


## Item number

OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	734-230
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SNAP-ON TYPE RELIEF HOUSING SUITABLE FOR PIN SPACING 3.5 MM / 0.138 IN	734-610
STRAIN RELIEF PLATE FOR SERIES 734	734-129

## Data sheet

734-110/037-000

**FEMALE PLUG WITH LOCKING LEVER**  
**PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH**  
**CODIG FINGERS**

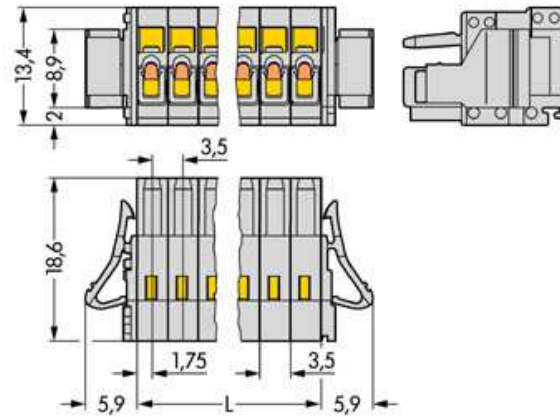

---

## Data sheet

734-110/037-000

**FEMALE PLUG WITH LOCKING LEVER  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CODIG FINGERS**

---

L = No.of poles x pin spacing