

Product Change Notification

Product Line:	5 pole A Series	Part No:	NC5F/MA*
Piece Part:		Part No:	
Engineering Change Request:		Date:	
Engineering Change Execution:		Date:	July 2012
Comments:	New connector design		

Affected products:	Changed versions: NC5FAH, NC5FAH-D, NC5FAH-0 NC5FAV, NC5FAV-D NC5MAH, NC5MAV
	Remaining versions: NC5FAV-SW, NC5FAV-SW-D, NC5MAV-SW

First Shipment of Modified Product:





- New housing design:

Plastic housing optimized for best workability. Plastic material remain polyamide PA6.6 30%GR with flammability rating UL94HB.





NEW

NC5MAV

OLD



NEW




OLD

- New female contact design:

Contact design remain fork type. Plating adapted by selective gold plating of contact area and tin plated pcb termination area for best conductivity and solderability. Tear drop design and pcb footprint remains unchanged

NC5FA*

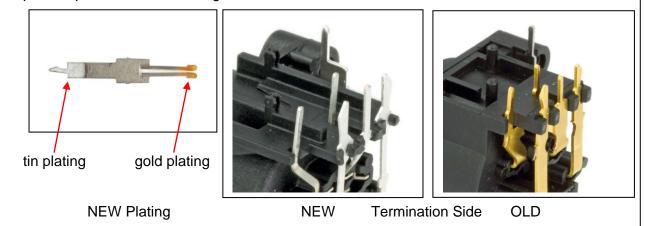






New location pin:


The cylindrical pin shape is replaced by the press-fit design like on the A- and B-series. The pcb layout is not changed and remain the same. Existing pcb's can be further used.






Female





NEW



OLD

Male locking element: -

Locking element incorporated into the plastic housing instead of metal piece. Locking force greater than 200N.

Male







 New female ground contact design: Ground contact design similar to the shape of ground #2 of A, B and A-combo series.











OLD

OLD

NEW

- Panel cut-out and pcb layout stay the same.
- Fastening hardware remains the same Plastite thread forming screw type Neutrik A-screw-1-8. The nominal size of the screw must be 2.63mm or #3. For further details please refer to product news 04/2011.

NC5FAH

- Color coding is no longer possible as ACRF and ACRM rings can no more be assembled.
- Removal tool for Push latch is no more included in delivery.
- All part numbers remain the same. After the first shipment of the new version only new items will be supplied. No stock will be maintainted of the old vesion.

