



4D SYSTEMS
TURNING TECHNOLOGY INTO ART

Embedded Audio-Sound Module SOMO-14D

DATASHEET


Document Date: 5th February 2013
Document Revision: 1.1

Contents

1. Description.....	3
2. Features	3
3. Pin Configuration and Summary.....	4
4. Pin Description	5
4.1. Micro-controller Interface Pins	5
4.2. Key Interface Pins.....	5
4.3. Audio Output and Control Pins	5
4.4. System Pins	5
5. Operating Modes.....	6
5.1. SERIAL MODE	6
5.2. KEY MODE	7
6. micro-SD Cards – FAT16 Format	7
7. Mechanical Dimensions	8
8. Development and Support Tools	8
8.1. OLED Display Modules	8
9. Timing Diagrams.....	9
9.1. Serial Data Timing and Waveforms	9
10. Specifications and Ratings.....	10
11. Legal Notice.....	11
12. Contact Information.....	11

1. Description

The **SOMO-14D (SOund MOdule)** is a tiny Audio-Sound module that can play back pre-stored audio files such as voice and music from a micro-SD memory card. The module supports 4-bit ADPCM audio files with sample rates from 6KHz up to 32KHz.

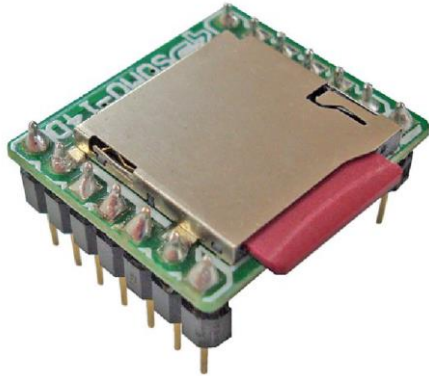

By using 4D Systems Workshop 4 Software IDE, any WAVE(.wav) or MP3(.mp3) file can be easily converted to the ADPCM(.ad4) format which can then be saved to a micro-SD memory card.

The compact 14pin drop-in-module takes up very minimal board space and is ideal for any application that requires embedded audio.

The module offers two modes of operation, SERIAL-MODE and the KEY-MODE.

The SERIAL-MODE provides a simple 2-wire interface to any micro-controller via its DATA and CLK lines. Audio operations such as PLAY, PAUSE, STOP and VOLUME control functions are all available to the host micro via simple serial commands.


The KEY-MODE provides a stand-alone operation where a host micro is not required.

With only 3 push buttons, a 3V battery and a speaker, an extremely compact and low component count MP3-Player like system can be implemented.


In short, the SOMO offers a very flexible, compact and low cost embedded audio solution for many applications.

2. Features

- Low-cost module for all embedded Audio Sound applications.
- Supports 4-bit ADPCM (.ad4) file formats with sampling rates from 6KHz to 32KHz.
- SERIAL MODE: Supports a 2-Wire (Data, Clock) interface to any micro-controller.
- KEY-MODE: Supports a simple stand-alone operation without a host micro.
- Differential 2 line PWM output for direct speaker drive (8/16/32 Ohm/0.25W).
- Dedicated 16-bit DAC audio output to use with an external amplifier.
- On-board micro-SD memory card adaptor for storing of audio, voice and music files (up to 512 files).
- Supports up to 2GB micro-SD memory cards (FAT/FAT16 format).
- Compact size measuring only 18.3 x 20.8 mm.
- Weight ~13g.
- 3.0V to 3.8V DC voltage range (single supply).
- RoHS Compliant.

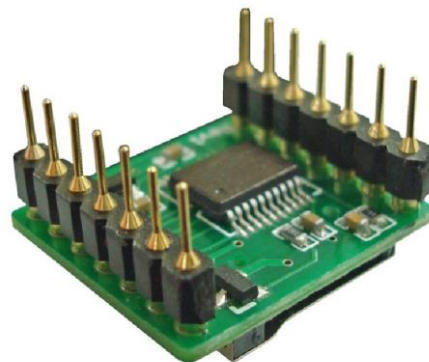

3. Pin Configuration and Summary

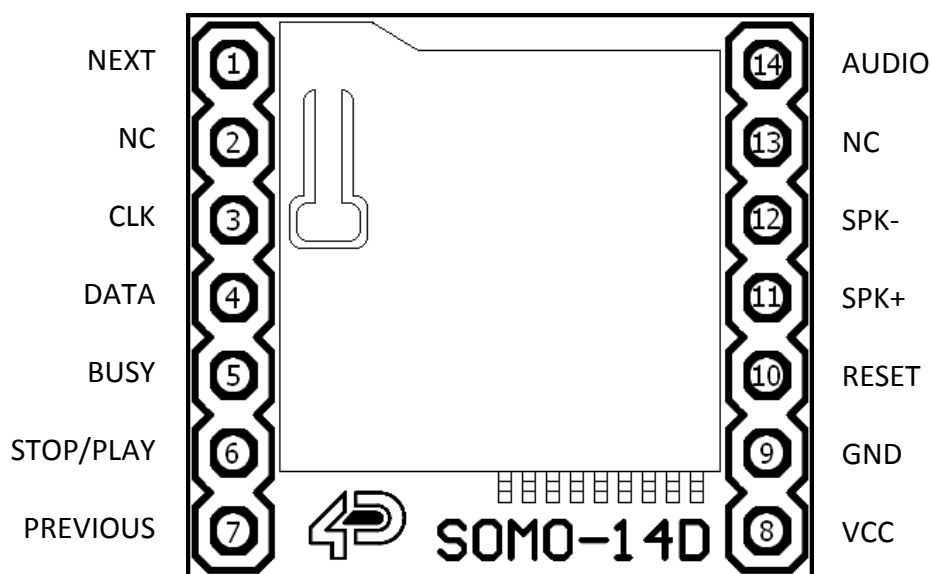

SOMO-14D Pin Outs			
Pin	Symbol	I/O	Description
1	NEXT	I	Selects the Next Audio file from the memory card. Active LOW triggered input. Connect to a push-button in stand-alone KEY-MODE.
2	NC	-	Not Connected.
3	CLK	I	Serial Clock input from host micro-controller. SERIAL-MODE use only.
4	DATA	I	Serial DATA input from host micro-controller. SERIAL-MODE use only.
5	BUSY	O	BUSY signal. Active HIGH output. This signal is high when the module is playing an audio file from the micro-SD memory card. This pin can be connected to a LED via 470Ohm resistor to GND.
6	PLAY/STOP	I	Play/Stop toggle input. Active LOW triggered input. Connect to a push-button in stand-alone KEY-MODE.
7	PREVIOUS	I	Selects the Previous Audio file from the memory card. Active LOW triggered input. Connect to a push-button in stand-alone KEY-MODE.
8	VCC	P	Main Voltage Supply +ve input pin. Working Voltage range is 3.0V to 3.8V, nominal 3.3V. Connect a capacitor in the range of 100uF to 470uF between this pin and supply ground.
9	GND	I	Supply Ground.
10	RESET	P	Master Reset signal. Active LOW triggered input. Internally pulled up. SERIAL-MODE: Can be controlled by external micro port or left open. KEY-MODE: Can be connected to a push button or left open.
11	SPK+	O	Speaker+ drive output. Connect to 8/16/32-Ohm, 250mW speaker +ve.
12	SPK-	O	Speaker- drive output. Connect to 8/16/32-Ohm, 250mW speaker -ve.
13	NC	--	Not Connected.
14	AUDIO	O	16-bit DAC output for external amplifier drive (optional). Use the BUSY signal to enable the audio to eliminate clicks. See Section 2.3

I = Input, O = Output, P = Power

4. Pin Description

This section describes in detail the hardware interface pins of the SOMO.

4.1. Micro-controller Interface Pins

CLK pin 3 (Serial Data Clock):

Synchronous Clock Input. Each serial data bit is latched into the module on the rising edge of the clock. The idle state of the clock must be high. When communication is required, the CLK is brought LOW for a period of 2ms (START bit wait time). Each individual data bit (starting with the MSB bit15) is then clocked in sequentially. The data is latched on every rising edge of the clock. When the last data bit (bit0) is clocked in the CLK signal must be held high for a period of 2ms (STOP bit wait time) before the next command data is sent. The clock HIGH and LOW periods are 100µs minimum.

Refer to **Section 9. Timing Diagrams** for more detailed timing and waveform information.

DATA pin 4 (Serial Data In):

Synchronous Data Input. The data is presented to the module by the host micro via this pin. Each command data is 16 bits wide. Data is serially clocked in to the module starting with the most significant bit (MSB bit15). Refer to **Section 9. Timing Diagrams** for more detailed timing and waveform information.

NOTE: For 5V systems, connect a series resistor (100 to 470 Ohms range) on the CLK and DATA pins between the SOMO and the target micro-controller.

4.2. Key Interface Pins

NEXT pin 1:

Selects the Next Audio file from the micro-SD memory card. Active LOW triggered input. Connect this pin to a push-button in stand-alone KEY-MODE.

PLAY/STOP pin 6:

Play/Stop active LOW trigger Input. Connect this pin to a push-button in stand-alone KEY-MODE. Each active low trigger will alternate between PLAY and STOP operation.

PREVIOUS pin 7:

Selects the Previous Audio file from the micro-SD

memory card. Active LOW triggered input. Connect this pin to a push-button in stand-alone KEY-MODE.

4.3. Audio Output and Control Pins

SPK+, SPK- pins 11, 12:

These pins provide a differential PWM+ and PWM- output to a speaker. Connect these pins to an 8/16/32 Ohm (250mW) speaker.

AUDIO pin 14:

External Amplifier Output pin. This pin provides a 16-bit DAC audio output to use with an external audio amplifier. Example circuit below provides a low cost implementation.

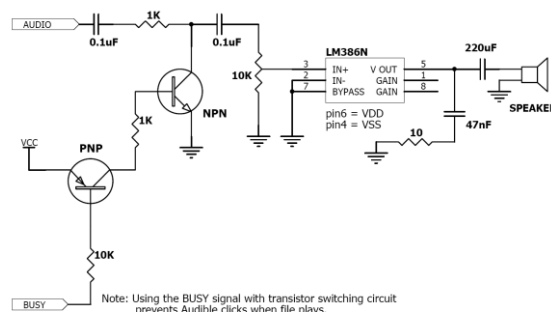


Figure 1: Optional Power Audio Circuit

Active high when SOMO plays an audio file and active low when no file is played or stopped. This pin can be used with a transistor arrangement to filter out audible clicks when using the AUDIO output with an external amplifier. It can also be used to signal the host micro the end of the audio file, in the serial mode.

4.4. System Pins

RESET pin 10 (Module Master Reset):

Module Master Reset pin. Active LOW input. Internally pulled up. After 1 second of a reset, the module will go into low power standby mode (8.0µA) if it detects no activity.

GND pin 9 (Module Ground):

Module ground pin. This pin must be connected to ground.

VCC pin 8 (Module Supply Voltage Input):

Module supply voltage input pin. This pin must be connected to a regulated supply voltage in the range of 3.0 to 3.8 Volts DC. Nominal operating voltage is 3.3 Volts. Connect a capacitor in the

range of 100uF to 470uF between this pin and supply ground. Figure 2 shows several power supply options.

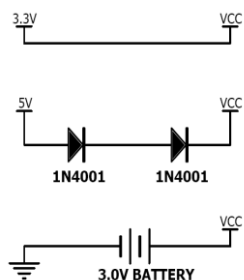


Figure 2: Power Supply Options

5. Operating Modes

The SOMO module offers two modes of operation, SERIAL-MODE and the KEY-MODE. This section describes both modes in detail.

5.1. SERIAL MODE

The SERIAL-MODE provides a simple 2-wire interface to any micro-controller. The host micro communicates with the module via the DATA and CLK lines. Figure 3 below outlines a typical set up.

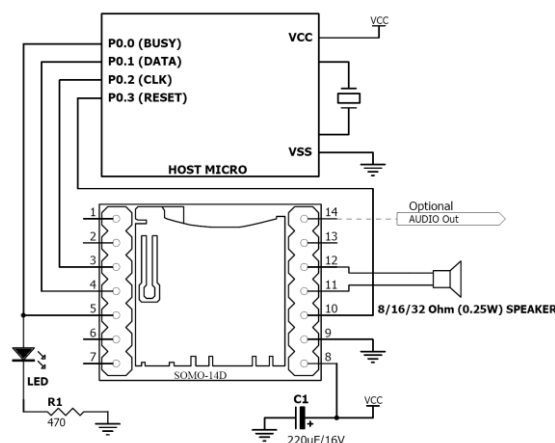


Figure 3: Typical Host Micro Interface

All commands are composed of single word (16 bit) data that must be clocked into the module in a serial fashion (most significant bit first). The clock rate is approximately 5KHz which enables even the slowest microcontroller to 'bit-bang' two I/O ports to achieve this simple communication.

Command Codes:

The SOMO audio operations such as FILE ADDRESS, PLAY, PAUSE and VOLUME control are all available to the host micro-controller as 16-bit command codes.

Table1 and Table2 below lists the available function codes and provides a brief description.

COMMAND CODE	FUNCTION	DESCRIPTION
0000h – 01FFh	AUDIO FILE ADDRESS	Selects one of the pre-stored audio/sound/voice files in the micro-SD memory card (up to 512 files max).
FFF0h – FFF7h	VOLUME	Volume adjustment codes. Total of 8 levels. FFF0h is the minimum and FFF7 is the maximum (also the default) volume level. The volume can be adjusted during play or standby state.
FFFEh	PLAY/PAUSE	Plays or Pauses the current audio file.
FFFFh	STOP	Stops playing the current audio file and puts the module in the low power idle mode.

Table 1: Command Code Description

COMMAND CODE	FILE ADDRESS	FILE NAME
0000h (0000dec)	File Address 1	"0000.ad4"
0001h (0001dec)	File Address 2	"0001.ad4"
0002h (0002dec)	File Address 3	"0002.ad4"
..
01FFh (0511dec)	File Address 512	"0511.ad4"

Note1: The file names stored in the micro-SD card must be the ASCII representation of the decimal command code with .ad4 extension:
"0000.ad4", "0001.ad4", ..., "0511.ad4"

Note2: It is recommended that the micro-SD card be reformatted when new audio files are stored.

Table 2: Audio File Addresses

5.2. KEY MODE

The KEY-MODE provides a stand-alone operation where a host micro is not required. With only 3 push buttons, a 3V battery and a speaker, an extremely compact and low component count audio system can be implemented as seen in Figure 4 below.

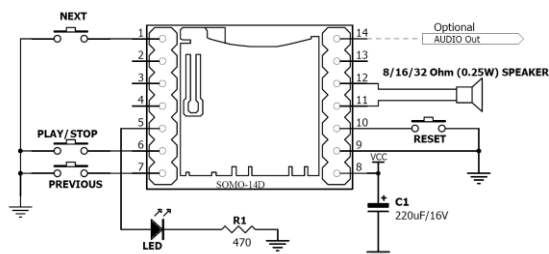


Figure 4: Stand Alone KEY-MODE


6. micro-SD Cards – FAT16 Format

The SOMO-14D uses off the shelf micro-SD memory cards with up to 2GB capacity. Before the memory card can be used it must first be formatted with FAT16 option. The formatting of the card can be done on any PC system with a card reader. Select the appropriate drive and choose the FAT16 (or just FAT in some systems) option when formatting. The card is now ready to be used in the SOMO.



NOTE: Certain brands of micro-SD memory cards may not work properly. This is evident by some files that maybe skipped and not played by the SOMO.

7. Mechanical Dimensions

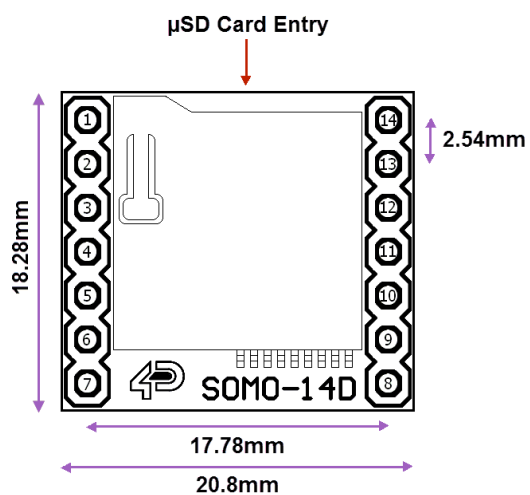

The height of the module is ~12mm

8. Development and Support Tools

8.1. OLED Display Modules

The following display modules, available from 4D Systems, can be used with the SOMO for a wide range of audio visual applications.




µOLED-128-G2: 1.5", 128x128, 65K colour OLED module



µOLED-160-G2: 1.7", 160x128, 65K colour OLED module

9. Timing Diagrams

9.1. Serial Data Timing and Waveforms

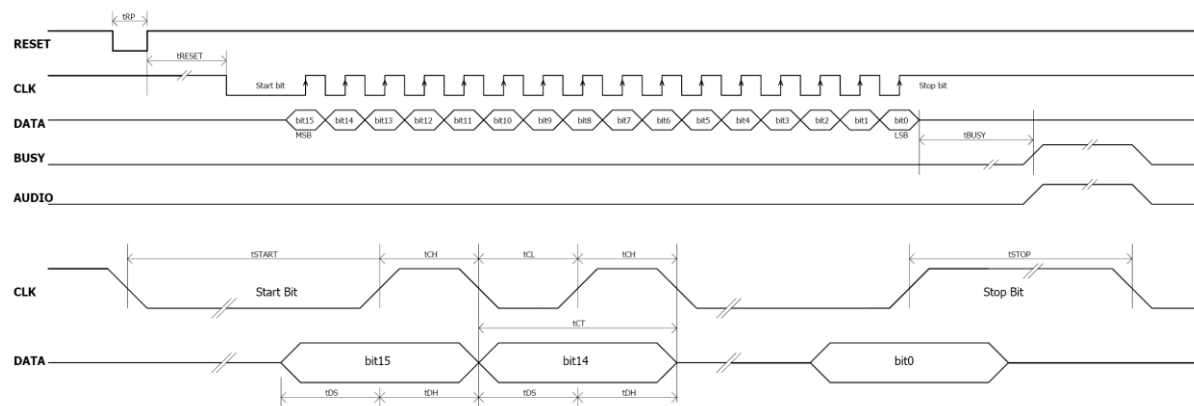

Item	Symbol	Min.	Typ.	Max.	Unit
Reset Pulse Width	tRP	5	-	-	ms
Reset Idle to Start Bit	tRESET	300	-	-	ms
Start Bit Low level pulse width	tSTART	2	-	-	ms
Stop Bit High level pulse width	tSTOP	2	-	-	ms
Clock High level pulse width	tCH	100	-	-	μs
Clock Low level pulse width	tCL	100	-	-	μs
Clock Cycle Total Period	tCT	200	-	-	μs
Write Data Setup	tDS	1	-	-	μs
Write Data Hold	tDH	50	-	-	μs
Busy Active High from last data bit latch	tBUSY	20	-	-	ms

10. Specifications and Ratings

ABSOLUTE MAXIMUM RATINGS	
Operating ambient temperature	-20°C to +75°C
Storage temperature	-40°C to +80°C
Voltage on any digital input pin with respect to GND	-0.3V to 6.0V
Voltage on SWITCH pin with respect to GND	-0.3V to 6.0V
Voltage on VCC with respect to GND	-0.3V to 6.0V
Total power dissipation.....	1.0W
NOTE: Stresses above those listed here may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the recommended operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.	

RECOMMENDED OPERATING CONDITIONS					
Parameter	Conditions	Min	Typ	Max	Units
Supply Voltage (VCC)		3.0	3.3	3.8	V
Operating Temperature		-10	--	+70	°C
Input Low Voltage (VIL)	All pins	GND	--	0.8VCC	V
Input High Voltage (VIH)	All pins	2.0VCC	--	VCC	V
Reset Pulse (tRP)	External Open Collector	5.0	--	--	ms

GLOBAL CHARACTERISTICS BASED ON OPERATING CONDITIONS					
Parameter	Conditions	Min	Typ	Max	Units
Supply Current (ICC)	VCC = 3.3V, Audio playing	36	41	45	mA
Supply Current (ICQ)	VCC = 3.3V, Idle	8.0	10	15	µA
Output Low Voltage (VOL)	All pins, IOL = 3.4mA	--	--	0.4	V
Output High Voltage (VOH)	All pins, IOL = -2.0mA	2.4	--	3.3	V

ORDERING INFORMATION	
Order Code: SOMO-14D	
Package: 90mm x 130mm (ZIP Bag dimensions).	
Packaging: Module sealed in antistatic padded ZIP bag.	

11. Legal Notice

Proprietary Information

The information contained in this document is the property of 4D Systems Pty. Ltd. and may be the subject of patents pending or granted, and must not be copied or disclosed without prior written permission.

4D Systems endeavours to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omission. The development of 4D Systems products and services is continuous and published information may not be up to date. It is important to check the current position with 4D Systems. 4D Systems reserves the right to modify, update or make changes to Specifications or written material without prior notice at any time.

All trademarks belong to their respective owners and are recognised and acknowledged.

Disclaimer of Warranties & Limitation of Liability

4D Systems makes no warranty, either expressed or implied with respect to any product, and specifically disclaims all other warranties, including, without limitation, warranties for merchantability, non-infringement and fitness for any particular purpose.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

In no event shall 4D Systems be liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) arising out of or relating to any product or service provided or to be provided by 4D Systems, or the use or inability to use the same, even if 4D Systems has been advised of the possibility of such damages.

4D Systems products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High Risk Activities'). 4D Systems and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

Use of 4D Systems' products and devices in 'High Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless 4D Systems from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any 4D Systems intellectual property rights.

12. Contact Information

For Technical Support: support@4dsystems.com.au

For Sales Support: sales@4dsystems.com.au

Website: www.4dsystems.com.au

Copyright 4D Systems Pty. Ltd. 2000-2012.