

# Datasheet

**APM32A407xGT7**

**Arm® Cortex® -M4 core-based 32-bit MCU**

**Version: V1.0**

# 1 Product Characteristics

## ■ Core

- 32-bit Arm® Cortex®-M4 core with FPU
- Up to 168MHz working frequency

## ■ Memory and interface

- Flash: The capacity is up to 1MB
- SRAM: System (192KB) + backup (4KB)
- SMC: Support CF card, SRAM, PSRAM, NOR and NAND memories

## ■ Clock

- HSECLK: 4~26MHz external crystal/ceramic oscillator supported
- LSECLK: 32.768KHz crystal/ceramic oscillator supported
- HSICLK: 16MHz RC oscillator calibrated by factory
- LSICLK: 28KHz RC oscillator supported
- PLL1: Phase locked loop; output frequency is configured by four parameters
- PLL2: Phase locked loop specially used to provide clock signals to I2S; output frequency is configured by three parameters

## ■ Reset and power management

- V<sub>DD</sub> range: 1.8~3.6V
- V<sub>DDA</sub> range: 1.8~3.6V
- V<sub>BAT</sub> range of backup domain power supply: 1.65V~3.6V
- Power-on/power-down/brown-out reset (POR/PDR/BOR) supported
- Programmable power supply voltage detector (PWD) supported

## ■ Low-power mode

- Sleep, stop and standby modes supported

## ■ DMA

- Two DMA; each DMA has 8 data streams, 16 in total

## ■ Debugging interface

- JTAG
- SWD

## ■ I/O

- Up to 114 I/O

- All I/O can be mapped to external interrupt vector
- Up to 112 FT input I/O

## ■ Communication peripherals

- 4 USART, 2 UART, supporting ISO7816, LIN and IrDA functions
- 3 I2C, supporting SMBus/PMBus
- 3 SPI (2 reusable I2S)
- 2 CAN
- 3 USB\_OTG controllers
- 1 SDIO interface

## ■ Analog peripherals

- 3 12-bit ADCs
- 2 12-bit DACs

## ■ Timer

- 2 16-bit advanced timers TMR1/8 that can provide 7-channel PWM output, support dead zone generation and braking input functions
- 2 32-bit general-purpose timers TMR2/5, each with up to 4 independent channels to support input capture, output comparison, PWM, pulse count and other functions
- 8 16-bit general-purpose timers TMR3/4/9/10/11/12/13/14, each with up to 2 independent channels to support input capture, output comparison, PWM, pulse count and other functions
- 2 16-bit basic timers TMR6/7
- 2 watchdog timers: one independent watchdog IWDT and one window watchdog WWDT
- 1 24-bit autodecrement SysTick Timer

## ■ RTC

- Support calendar function
- Alarm and regular wake-up from stop/standby mode

## ■ CRC computing unit

## ■ 96-bit unique device ID

# Contents

<b>1</b>	<b>Product Characteristics</b>	<b>1</b>
<b>2</b>	<b>Product Information</b>	<b>6</b>
<b>3</b>	<b>Pin Information</b>	<b>7</b>
3.1	Pin distribution	7
3.2	Pin function description	8
3.3	GPIO Multiplexing Function Configuration	29
<b>4</b>	<b>Function Description</b>	<b>42</b>
4.1	System architecture	43
4.1.1	System block diagram	43
4.1.2	Address mapping	44
4.1.3	Startup configuration	45
4.2	Core	45
4.3	Interrupt controller	45
4.3.1	Nested Vector Interrupt Controller (NVIC)	45
4.3.2	External Interrupt/Event Controller (EINT)	45
4.4	On-chip memory	45
4.4.1	Static memory controller (SMC)	46
4.4.2	LCD parallel interface (LCD)	46
4.5	Clock	46
4.5.1	Clock tree	46
4.5.2	Clock source	48
4.5.3	System clock	48
4.5.4	Bus clock	48
4.5.5	Phase locked loop	48
4.6	Power and power management	48
4.6.1	Power supply scheme	48
4.6.2	Voltage regulator	49
4.6.3	Power supply voltage monitor	49

4.7	Low-power mode .....	49
4.8	DMA.....	50
4.9	GPIO.....	50
4.10	Communication peripherals .....	50
4.10.1	USART/UART.....	50
4.10.2	I2C .....	51
4.10.3	SPI/I2S .....	51
4.10.4	CAN .....	51
4.10.5	USB_OTG .....	51
4.10.6	Ethernet .....	51
4.10.7	SDIO .....	52
4.11	Analog peripherals .....	52
4.11.1	ADC .....	52
4.11.2	DAC .....	52
4.12	Timer.....	52
4.13	RTC .....	54
4.13.1	Backup domain.....	54
4.14	RNG.....	54
4.15	DCI.....	55
4.16	CRC .....	55
<b>5</b>	<b>Electrical Characteristics .....</b>	<b>55</b>
5.1	Test conditions of electrical characteristics .....	55
5.1.1	Maximum and minimum values.....	55
5.1.2	Typical value.....	55
5.1.3	Typical curve.....	55
5.1.4	Power supply scheme .....	56
5.1.5	Load capacitance .....	57
5.2	Test under general operating conditions .....	57
5.3	Absolute maximum ratings .....	58
5.3.1	Maximum temperature characteristics .....	58

5.3.2 Maximum rated voltage characteristics.....	58
5.3.3 Maximum rated current characteristics .....	58
5.3.4 Electro-static discharge (ESD).....	59
5.3.5 Static latch-up (LU).....	59
5.4 On-chip memory.....	59
5.4.1 Flash characteristics.....	59
5.5 Clock.....	60
5.5.1 Characteristics of external clock source .....	60
5.5.2 Characteristics of internal clock source .....	61
5.5.3 PLL Characteristics .....	62
5.6 Reset and power management.....	62
5.6.1 Test of Embedded Reset and Power Control Module Characteristics.....	62
5.7 Power consumption.....	64
5.7.1 Power consumption test environment.....	64
5.7.2 Power consumption in run mode.....	65
5.7.3 Power consumption in sleep mode .....	68
5.7.4 Power consumption in stop mode .....	69
5.7.5 Power consumption in standby mode .....	69
5.7.6 Peripheral power consumption.....	70
5.7.7 Backup Domain Power Consumption .....	72
5.8 Wake-up time in low-power mode.....	72
5.9 I/O port characteristics .....	73
5.10 NRST pin characteristics.....	75
5.11 Communication peripherals .....	76
5.11.1 I2C peripheral characteristics.....	76
5.11.2 SPI peripheral characteristics .....	77
5.12 Analog peripherals .....	79
5.12.1 ADC .....	79
5.12.2 DAC .....	81
<b>6 Package Information.....</b>	<b>83</b>

6.1	LQFP144 package information .....	83
6.2	LQFP100 package information .....	86
<b>7</b>	<b>Packaging Information.....</b>	<b>89</b>
7.1	Tray packaging .....	89
<b>8</b>	<b>Ordering Information .....</b>	<b>91</b>
<b>9</b>	<b>Commonly Used Function Module Denomination.....</b>	<b>92</b>
<b>10</b>	<b>Version History .....</b>	<b>93</b>

## 2 Product Information

See the following table for APM32A407Xgt7 product functions and peripheral configuration.

Table 1 Functions and Peripherals of APM32A407xGT7 Series Chips

Product		APM32A407			
Model	VGT7	ZGT7			
Package	LQFP100	LQFP144			
Core and maximum working frequency	Arm® 32-bit Cortex®-M4@168MHz				
Working voltage	1.8~3.6V				
Flash(KB)	1024				
System + backup SRAM(KB)	192+4				
SMC	1				
GPIOs	82	114			
Communication interface	USART/UART	4/2			
	SPI/I2S	3/2			
	I2C	3			
	OTG_FS	1			
	OTG_HS	2			
	CAN	2			
	Ethernet	1			
	SDIO	1			
Timer	16-bit advanced	2			
	32-bit general	2			
	16-bit general	8			
	16-bit basic	2			
	System tick timer	1			
	Watchdog	2			
Real-time clock	1				
DCI	1				
RNG	1				
12-bit ADC	Unit	3			
	External channel	13	21		
	Internal channel	3			
12-bit ADC	Unit	2			
	Channel	2			
Operating temperature	Ambient temperature: -40°C to 105°C Junction temperature: -40°C to 125°C				

### 3 Pin Information

#### 3.1 Pin distribution

Figure 1 Distribution Diagram of APM32A407xGT7 Series LQFP144 Pins


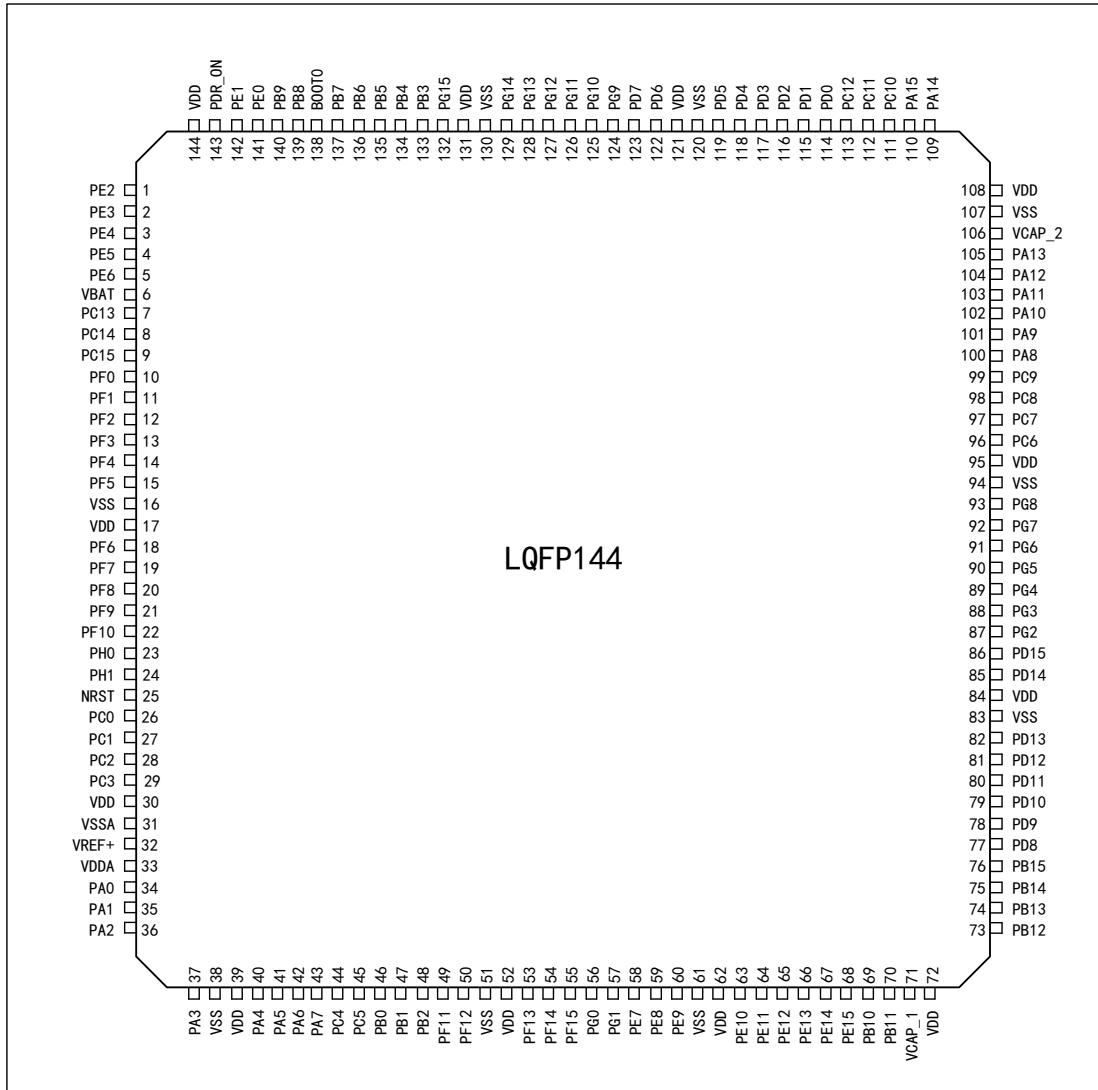


Figure 2 Distribution Diagram of APM32A407xGT7 Series LQFP100 Pins

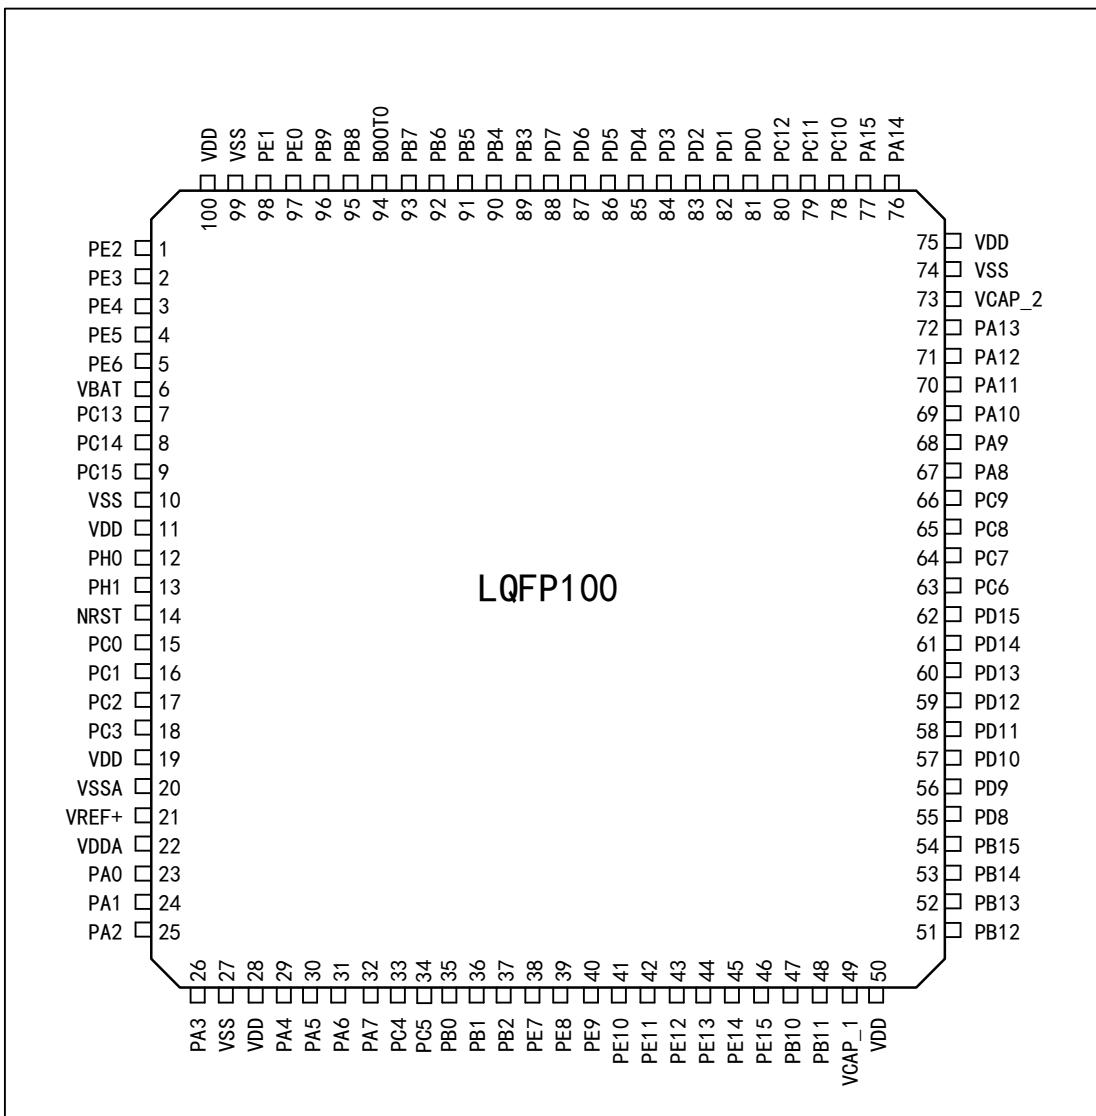

### 3.2 Pin function description

Table 2 Legends/Abbreviations Used in Output Pin Table

Name	Abbreviation	Definition
Pin name		Unless otherwise specified in parentheses below the pin name, the pin functions during and after reset are the same as the actual pin name
Pin type	P	Power pin
	I	Only input pin
	I/O	I/O pin
I/O structure	5T	FT I/O
	STDA	3.3V standard I/O, directly connected to ADC
	STD	3.3V standard I/O
	B	Dedicated Boot0 pin

Name		Abbreviation	Definition
		RST	Bidirectional reset pin with built-in pull-up resistor
Notes		Unless otherwise specified in the notes, all I/O is set as floating input during and after reset	
Pin function	Default multiplexing function		Function directly selected/enabled through peripheral register
	Redefining function		Select this function through AFIO remapping register

Table 3 Description of APM32A407xGT7 by Pin Number

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
PE2	I/O	5T	TRACECK, SMC_A23, ETH_MII_TXD3, EVENTOUT	-	1	1
PE3	I/O	5T	TRACED0, SMC_A19, EVENTOUT	-	2	2
PE4	I/O	5T	TRACED1, SMC_A20, DCI_D4, EVENTOUT	-	3	3
PE5	I/O	5T	TRACED2, SMC_A21, TMR9_CH1, DCI_D6, EVENTOUT	-	4	4
PE6	I/O	5T	TRACED3, SMC_A22, TMR9_CH2, DCI_D7, EVENTOUT	-	5	5

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
V <sub>BAT</sub>	P	-	-	-	6	6
PC13	I/O	5T	EVENTOUT	RTC_OUT, RTC_TAMP1, RTC_TS	7	7
PC14- OSC32_IN (PC14)	I/O	5T	EVENTOUT	OSC32_IN	8	8
PC15- OSC32_OUT (PC15)	I/O	5T	EVENTOUT	OSC32_OUT	9	9
PF0	I/O	5T	SMC_A0, I2C2_SDA, EVENTOUT	-	-	10
PF1	I/O	5T	SMC_A1, I2C2_SCL, EVENTOUT	-	-	11
PF2	I/O	5T	SMC_A2, I2C2_SMBAI, EVENTOUT	-	-	12
PF3	I/O	5T	SMC_A3, EVENTOUT	ADC3_IN9	-	13
PF4	I/O	5T	SMC_A4, EVENTOUT	ADC3_IN14	-	14
PF5	I/O	5T	SMC_A5, EVENTOUT	ADC3_IN15	-	15
V <sub>SS</sub>	P	-	-	-	10	16
V <sub>DD</sub>	P	-	-	-	11	17
PF6	I/O	5T	TMR10_CH1, SMC_NIORD,	ADC3_IN4	-	18

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
PF7	I/O	5T	TMR11_CH1, SMC_NREG, EVENTOUT	ADC3_IN5	-	19
PF8	I/O	5T	TMR13_CH1, SMC_NIOWR, EVENTOUT	ADC3_IN6	-	20
PF9	I/O	5T	TMR14_CH1, SMC_CD, EVENTOUT	ADC3_IN7	-	21
PF10	I/O	5T	SMC_INTR, EVENTOUT	ADC3_IN8	-	22
PH0-OSC_IN (PH0)	I/O	5T	EVENTOUT	OSC_IN	12	23
PH1-OSC_OUT (PH1)	I/O	5T	EVENTOUT	OSC_OUT	13	24
NRST	I/O	RST	-	-	14	25
PC0	I/O	5T	OTG_HS_ULPI_STP, EVENTOUT	ADC123_IN10	15	26
PC1	I/O	5T	ETH_MDC, EVENTOUT	ADC123_IN11	16	27
PC2	I/O	5T	SPI2_MISO, OTG_HS_ULPI_DIR, ETH_MII_TXD2, I2S2ext_SD, EVENTOUT	ADC123_IN12	17	28
PC3	I/O	5T	SPI2_MOSI,	ADC123_IN13	18	29

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			I2S2_SD, OTG_HS_ULPI_NXT, ETH_MII_TX_CLK, EVENTOUT			
V <sub>DD</sub>	P	-	-	-	19	30
V <sub>SSA</sub>	P	-	-	-	20	31
V <sub>REF+</sub>	P	-	-	-	21	32
V <sub>DDA</sub>	P	-	-	-	22	33
PA0-WKUP (PA0)	I/O	5T	USART2_CTS, UART4_TX, ETH_MII_CRS, TMR2_CH1_ETR, TMR5_CH1, TMR8_ETR, EVENTOUT	WKUP, ADC123_IN0	23	34
PA1	I/O	5T	USART2_RTS, UART4_RX, ETH_RMII_REF_CLK, ETH_MII_RX_CLK, TMR5_CH2, TMR2_CH2, EVENTOUT	ADC123_IN1	24	35
PA2	I/O	5T	USART2_TX, TMR5_CH3, TMR9_CH1, TMR2_CH3, ETH_MDIO,	ADC123_IN2	25	36

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
PA3	I/O	5T	USART2_RX, TMR5_CH4, TMR9_CH2, TMR2_CH4 OTG_HS_ULPI_D0, ETH_MII_COL, EVENTOUT	ADC123_IN3	26	37
V <sub>SS</sub>	P	-	-	-	27	38
V <sub>DD</sub>	P	-	-	-	28	39
PA4	I/O	STD A	SPI1_NSS, SPI3_NSS, USART2_CK, DCI_HSYNC, OTG_HS_SOF, I2S3_WS, EVENTOUT	DAC_OUT1, ADC12_IN4	29	40
PA5	I/O	STD A	SPI1_SCK, OTG_HS_ULPI_CK, TMR2_CH1_ETR, TMR8_CH1N, EVENTOUT	DAC_OUT2, ADC12_IN5	30	41
PA6	I/O	5T	SPI1_MISO, TMR8_BKIN, TMR13_CH1, DCI_PIXCLK, TMR3_CH1,	ADC12_IN6	31	42

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			TMR1_BKIN, EVENTOUT			
PA7	I/O	5T	SPI1_MOSI, TMR8_CH1N, TMR14_CH1, TMR3_CH2, ETH_MII_RX_DV, TMR1_CH1N, ETH_RMII_CRS_DV, EVENTOUT	ADC12_IN7	32	43
PC4	I/O	5T	ETH_RMII_RX_D0, ETH_MII_RX_D0, EVENTOUT	ADC12_IN14	33	44
PC5	I/O	5T	ETH_RMII_RX_D1, ETH_MII_RX_D1, EVENTOUT	ADC12_IN15	34	45
PB0	I/O	5T	TMR3_CH3 TMR8_CH2N, OTG_HS_ULPI_D1, ETH_MII_RXD2, TMR1_CH2N, EVENTOUT	ADC12_IN8	35	46
PB1	I/O	5T	TMR3_CH4 TMR8_CH3N, OTG_HS_ULPI_D2, ETH_MII_RXD3, TMR1_CH3N,	ADC12_IN9	36	47

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
PB2-BOOT (PB2)	I/O	5T	EVENTOUT	-	37	48
PF11	I/O	5T	DCI_D12, EVENTOUT	-	-	49
PF12	I/O	5T	SMC_A6, EVENTOUT	-	-	50
V <sub>SS</sub>	P	-	-	-	-	51
V <sub>DD</sub>	P	-	-	-	-	52
PF13	I/O	5T	SMC_A7, EVENTOUT	-	-	53
PF14	I/O	5T	SMC_A8, EVENTOUT	-	-	54
PF15	I/O	5T	SMC_A9, EVENTOUT	-	-	55
PG0	I/O	5T	SMC_A10, EVENTOUT	-	-	56
PG1	I/O	5T	SMC_A11, EVENTOUT	-	-	57
PE7	I/O	5T	SMC_D4, TMR1_ETR, EVENTOUT	-	38	58
PE8	I/O	5T	SMC_D5, TMR1_CH1N, EVENTOUT	-	39	59
PE9	I/O	5T	SMC_D6, TMR1_CH1,	-	40	60

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
V <sub>SS</sub>	P	-	-	-	-	61
V <sub>DD</sub>	P	-	-	-	-	62
PE10	I/O	5T	SMC_D7, TMR1_CH2N, EVENTOUT	-	41	63
PE11	I/O	5T	SMC_D8, TMR1_CH2, EVENTOUT	-	42	64
PE12	I/O	5T	SMC_D9, TMR1_CH3N, EVENTOUT	-	43	65
PE13	I/O	5T	SMC_D10, TMR1_CH3, EVENTOUT	-	44	66
PE14	I/O	5T	SMC_D11, TMR1_CH4, EVENTOUT	-	45	67
PE15	I/O	5T	SMC_D12, TMR1_BKIN, EVENTOUT	-	46	68
PB10	I/O	5T	SPI2_SCK, I2S2_CK, I2C2_SCL, USART3_TX, OTG_HS_ULPI_D3, ETH_MII_RX_ER,	-	47	69

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			TMR2_CH3, EVENTOUT			
PB11	I/O	5T	I2C2_SDA, USART3_RX, OTG_HS_ULPI_D4, ETH_RMII_TX_EN, ETH_MII_TX_EN, TMR2_CH4, EVENTOUT	-	48	70
V <sub>CAP_1</sub>	P	-	-	-	49	71
V <sub>DD</sub>	P	-	-	-	50	72
PB12	I/O	5T	SPI2_NSS, I2S2_WS, I2C2_SMBAI, USART3_CK, TMR1_BKIN, CAN2_RX, OTG_HS_ULPI_D5, ETH_RMII_TXD0, ETH_MII_TXD0, OTG_HS_ID, EVENTOUT	-	51	73
PB13	I/O	5T	SPI2_SCK, I2S2_CK, USART3_CTS, TMR1_CH1N, CAN2_TX,	OTG_HS_VBUS	52	74

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			OTG_HS_ULPI_D6, ETH_RMII_TXD1, ETH_MII_TXD1, EVENTOUT			
PB14	I/O	5T	SPI2_MISO, TMR1_CH2N, TMR12_CH1, OTG_HS_DM, USART3_RTS, TMR8_CH2N, I2S2ext_SD, EVENTOUT	-	53	75
PB15	I/O	5T	SPI2_MOSI, I2S2_SD, TMR1_CH3N, TMR8_CH3N, TMR12_CH2, OTG_HS_DP, EVENTOUT	RTC_REFIN	54	76
PD8	I/O	5T	SMC_D13, USART3_TX, EVENTOUT	-	55	77
PD9	I/O	5T	SMC_D14, USART3_RX, EVENTOUT	-	56	78
PD10	I/O	5T	SMC_D15 USART3_CK,	-	57	79

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
PD11	I/O	5T	SMC_CLE, SMC_A16, USART3_CTS, EVENTOUT	-	58	80
PD12	I/O	5T	SMC_ALE, SMC_A17, TMR4_CH1, USART3_RTS, EVENTOUT	-	59	81
PD13	I/O	5T	SMC_A18, TMR4_CH2, EVENTOUT	-	60	82
V <sub>SS</sub>	P	-	-	-	-	83
V <sub>DD</sub>	P	-	-	-	-	84
PD14	I/O	5T	SMC_D0, TMR4_CH3, EVENTOUT	-	61	85
PD15	I/O	5T	SMC_D1, TMR4_CH4, EVENTOUT	-	62	86
PG2	I/O	5T	SMC_A12, EVENTOUT	-	-	87
PG3	I/O	5T	SMC_A13, EVENTOUT	-	-	88
PG4	I/O	5T	SMC_A14, EVENTOUT	-	-	89

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
PG5	I/O	5T	SMC_A15, EVENTOUT	-	-	90
PG6	I/O	5T	SMC_INT2, EVENTOUT	-	-	91
PG7	I/O	5T	SMC_INT3, USART6_CK, EVENTOUT	-	-	92
PG8	I/O	5T	USART6_RTS, ETH_PPS_OUT, EVENTOUT	-	-	93
V <sub>SS</sub>	P	-	-	-	-	94
V <sub>DD</sub>	P	-	-	-	-	95
PC6	I/O	5T	I2S2_MCK, TMR8_CH1, SDIO_D6, USART6_TX, DCI_D0, TMR3_CH1, EVENTOUT	-	63	96
PC7	I/O	5T	I2S3_MCK, TMR8_CH2, SDIO_D7, USART6_RX, DCI_D1, TMR3_CH2, EVENTOUT	-	64	97
PC8	I/O	5T	TMR8_CH3,	-	65	98

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			SDIO_D0, TMR3_CH3, USART6_CK, DCI_D2, EVENTOUT			
PC9	I/O	5T	I2S_CKIN, MCO2, TMR8_CH4, SDIO_D1, I2C3_SDA, DCI_D3, TMR3_CH4, EVENTOUT	-	66	99
PA8	I/O	5T	USART1_CK, TMR1_CH1, MCO, I2C3_SCL, OTG_FS_SOF, EVENTOUT	-	67	100
PA9	I/O	5T	USART1_TX, TMR1_CH2, I2C3_SMBAI, DCI_D0, EVENTOUT	OTG_FS_VBUS	68	101
PA10	I/O	5T	USART1_RX, TMR1_CH3, OTG_FS_ID,	-	69	102

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			DCI_D1, EVENTOUT			
PA11	I/O	5T	USART1_CTS, CAN1_RX, TMR1_CH4, OTG_FS_DM, EVENTOUT	-	70	103
PA12	I/O	5T	USART1_RTS, CAN1_TX, TMR1_ETR, OTG_FS_DP, EVENTOUT	-	71	104
PA13 (JTMS-SWDIO)	I/O	5T	JTMS-SWDIO, EVENTOUT	PA13	72	105
V <sub>CAP_2</sub>	P	-	-	-	73	106
V <sub>ss</sub>	P	-	-	-	74	107
V <sub>DD</sub>	P	-	-	-	75	108
PA14 (JTCK/SWCLK)	I/O	5T	JTCK-SWCLK, EVENTOUT	-	76	109
PA15 (JTDI)	I/O	5T	JTDI, SPI3_NSS, I2S3_WS, TMR2_CH1_ETR, SPI1_NSS, EVENTOUT	-	77	110
PC10	I/O	5T	SPI3_SCK, I2S3_CK,	-	78	111

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			UART4_TX, SDIO_D2, DCI_D8, USART3_TX, EVENTOUT			
PC11	I/O	5T	UART4_RX, SPI3_MISO, SDIO_D3, DCI_D4, USART3_RX, I2S3ext_SD, EVENTOUT	-	79	112
PC12	I/O	5T	UART5_TX, SDIO_CK, DCI_D9, SPI3_MOSI, I2S3_SD, USART3_CK, EVENTOUT	-	80	113
PD0	I/O	5T	SMC_D2, CAN1_RX, EVENTOUT	-	81	114
PD1	I/O	5T	SMC_D3, CAN1_TX, EVENTOUT	-	82	115
PD2	I/O	5T	TMR3_ETR, UART5_RX,	-	83	116

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			SDIO_CMD, DCI_D11, EVENTOUT			
PD3	I/O	5T	SMC_CLK, USART2_CTS, EVENTOUT	-	84	117
PD4	I/O	5T	SMC_NOE, USART2_RTS, EVENTOUT	-	85	118
PD5	I/O	5T	SMC_NWE, USART2_TX, EVENTOUT	-	86	119
V <sub>SS</sub>	P	-	-	-	-	120
V <sub>DD</sub>	P	-	-	-	-	121
PD6	I/O	5T	SMC_NWAIT, USART2_RX, EVENTOUT	-	87	122
PD7	I/O	5T	SMC_NE1, SMC_NCE2, USART2_CK, EVENTOUT	-	88	123
PG9	I/O	5T	SMC_NE2, SMC_NCE3, USART6_RX, EVENTOUT	-	-	124
PG10	I/O	5T	SMC_NCE4_1, SMC_NE3,	-	-	125

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			EVENTOUT			
PG11	I/O	5T	SMC_NCE4_2, ETH_MII_TX_EN, ETH_RMII_TX_EN, EVENTOUT	-	-	126
PG12	I/O	5T	SMC_NE4, USART6_RTS, EVENTOUT	-	-	127
PG13	I/O	5T	SMC_A24, USART6_CTS, ETH_MII_TXD0, ETH_RMII_TXD0, EVENTOUT	-	-	128
PG14	I/O	5T	SMC_A25, USART6_TX, ETH_MII_TXD1, ETH_RMII_TXD1, EVENTOUT	-	-	129
V <sub>SS</sub>	P	-	-	-	-	130
V <sub>DD</sub>	P	-	-	-	-	131
PG15	I/O	5T	USART6_CTS, DCI_D13, EVENTOUT	-	-	132
PB3 (JTDO/TRACESWO)	I/O	5T	JTDO, TRACESWO, SPI3_SCK, I2S3_CK,	-	89	133

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			TMR2_CH2,  SPI1_SCK,  EVENTOUT			
PB4 (NJTRST)	I/O	5T	NJTRST,  SPI3_MISO,  TMR3_CH1,  SPI1_MISO,  I2S3ext_SD,  EVENTOUT	-	90	134
PB5	I/O	-	I2C1_SMBAI,  CAN2_RX,  OTG_HS_ULPI_D7,  ETH_PPS_OUT,  TMR3_CH2,  SPI1_MOSI,  SPI3_MOSI,  DCI_D10,  I2S3_SD,  EVENTOUT	-	91	135
PB6	I/O	5T	I2C1_SCL,  TMR4_CH1,  CAN2_TX,  DCI_D5,  USART1_TX,  EVENTOUT	-	92	136
PB7	I/O	5T	I2C1_SDA,  SMC_NL,	-	93	137

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			DCI_VSYNC, USART1_RX, TMR4_CH2, EVENTOUT			
BOOT0	I	B	-	V <sub>PP</sub>	94	138
PB8	I/O	5T	TMR4_CH3, SDIO_D4, TMR10_CH1, DCI_D6, ETH_MII_TXD3, I2C1_SCL, CAN1_RX, EVENTOUT	-	95	139
PB9	I/O	5T	SPI2_NSS, I2S2_WS, TMR4_CH4, TMR11_CH1, SDIO_D5, DCI_D7, I2C1_SDA, CAN1_TX, EVENTOUT	-	96	140
PE0	I/O	5T	TMR4_ETR, SMC_NBL0, DCI_D2, EVENTOUT	-	97	141
PE1	I/O	5T	SMC_NBL1,	-	98	142

Name (Function after reset)	Type	Structure	Multiplexing function	Additional function	LQFP100	LQFP144
			DCI_D3, EVENTOUT			
PDR_ON	I	5T	-	-	-	143
V <sub>DD</sub>	P	-	-	-	100	144

Note:

(1) PC13, PC14 and PC15 are powered through the power switch. Since the switch only sinks limited current (3mA), the use of GPIO from PC13 to PC15 in output mode is limited:

- ① The speed shall not exceed 2MHz when the heavy load is 30pF;
- ② Not used for current source (e.g. driving LED).

### 3.3 GPIO Multiplexing Function Configuration

Table 4 GPIOA Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PA0	-	TMR2_C_H1_ETR	TMR5_CH1	TMR8_ETR	-	-	-	USART2_CTS	UART4_TX	-	-	ETH_MII_CRS	-	-	-	EVEN TOUT
PA1	-	TMR2_C_H2	TMR5_CH2	-	-	-	-	USART2_RTS	UART4_RX	-	-	ETH_MII_RX_CLK	-	-	-	EVEN TOUT
PA2	-	TMR2_C_H3	TMR5_CH3	TMR9_CH1	-	-	-	USART2_TX	-	-	-	ETH_MDIO	-	-	-	EVEN TOUT
PA3	-	TMR2_C_H4	TMR5_CH4	TMR9_CH2	-	-	-	USART2_RX	-	-	OTG_HS_ULPI_D0	ETH_MII_COL	-	-	-	EVEN TOUT
PA4	-	-	-	-	-	SPI1_NSS	SPI3_NSS	USART2_CK	-	-	-	-	OTG_HS_SOF	DCI_H_SYNC	-	EVEN TOUT
PA5	-	TMR2_C_H1_ETR		TMR8_CH1N	-	SPI1_SCK	-	-	-		OTG_HS_ULPI_CK	-	-	-	-	EVEN TOUT
PA6	-	TMR1_B_KIN	TMR3_CH1	TMR8_BKIN	-	SPI1_MISO	-	-	-	TMR13_CH1	-	-	-	DCI_PI_XCK	-	EVEN TOUT
PA7	-	TMR1_C_H1N	TMR3_CH2	TMR8_CH1N	-	SPI1_MOSI	-	-	-	TMR14_CH1	-	ETH_MII_RX_DV	-	-	-	EVEN TOUT

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PA8	MCO1	TMR1_C_H1	-	-	I2C3_SCL	-	-	USART1_CK	-	-	OTG_FS_SOF	-	-	-	-	EVEN TOUT
PA9	-	TMR1_C_H2	-	-	I2C3_SMBA	-	-	USART1_TX	-	-	-	-	-	DCI_D0	-	EVEN TOUT
PA10	-	TMR1_C_H3	-	-	-	-	-	USART1_RX	-	-	OTG_FS_ID	-	-	DCI_D1	-	EVEN TOUT
PA11	-	TMR1_C_H4	-	-	-	-	-	USART1_CTS	-	CAN1_RX	OTG_FS_DM	-	-	-	-	EVEN TOUT
PA12	-	TMR1_E_TR	-	-	-	-	-	USART1_RTS	-	CAN1_TX	OTG_FS_DP	-	-	-	-	EVEN TOUT
PA13	JTMS_SWDIO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVEN TOUT
PA14	JTCK_SWCLK	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVEN TOUT
PA15	JTDI	TMR2_C_H1 TMR2_E_TR	-	-	-	SPI1_NSS	SPI3_NSS I2C3_WS	-	-	-	-	-	-	-	-	EVEN TOUT

Table 5 GPIOB Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	A F 8	AF9	AF10	AF11	AF12	AF13	AF 14	AF 15
PB0	-	TMR1_ CH2N	TMR3 _CH3	TMR8_ CH2N	-	-	-	-	-	-	OTG_HS_ ULPI_D1	ETH_MII _RXD2	-	-	-	EVEN TOUT
PB1	-	TMR1_ CH3N	TMR3 _CH4	TMR8_ CH3N	-	-	-	-	-	-	OTG_HS_ ULPI_D2	ETH_MII _RXD3	-	-	-	EVEN TOUT
PB2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVEN TOUT
PB3	JTDO/TR ACESWO	TMR2_ CH2	-	-	-	SPI1_SCK	SPI3_SCK I2S3_CK	-	-	-	-	-	-	-	-	EVEN TOUT
PB4	NJTRST	-	TMR3 _CH1	-	-	SPI1_MIS O	SPI3_MIS O	I2S3ext _SD	-	-	-	-	-	-	-	EVEN TOUT
PB5	-	-	TMR3 _CH2	-	I2C1_ SMBA	SPI1_MOS I	SPI3_MOS I2S3_SD	-	-	CAN2_RX	OTG_HS_ ULPI_D7	ETH_PP S_OUT	-	DCI_D 10	-	EVEN TOUT
PB6	-	-	TMR4 _CH1	-	I2C1_ SCL	-	-	USART 1_TX	-	CAN2_TX	-	-	-	DCI_D 5	-	EVEN TOUT
PB7	-	-	TMR4 _CH2	-	I2C1_ SDA	-	-	USART 1_RX	-	-	-	-	SMC_NL	DCI_V SYNC	-	EVEN TOUT
PB8	-	-	TMR4 _CH3	TMR10 _CH1	I2C1_ SCL	-	-	-	-	CAN1_RX	-	ETH_MII _TXD3	SDIO_D4	DCI_D 6	-	EVEN TOUT
PB9	-	-	TMR4 _CH4	TMR11 _CH1	I2C1_ SDA	SPI2 NSS I2S2_WS	-	-	-	CAN1_TX	-	-	SDIO_D5	DCI_D 7	-	EVEN TOUT
PB10	-	TMR2_ CH3	-	-	I2C2_ SCL	SPI2_SCK I2S2_CK	-	USART 3_TX	-	-	OTG_HS_ ULPI_D3	ETH_MII _RX_ER	-	-	-	EVEN TOUT

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	A F 8	AF9	AF10	AF11	AF12	AF13	AF 14	AF15
PB 11	-	TMR2_ CH4	-	-	I2C2_ SDA	-	-	USART 3_RX	-	-	OTG_HS_ ULPI_D4	ETH_MII _TX_EN	-	-	-	EVEN TOUT
PB 12	-	TMR1_ BKIN	-	-	I2C2_ SMBA	SPI2_NSS I2S2_WS	-	USART 3_CK	-	CAN2_ RX	OTG_HS_ ULPI_D5	ETH_RM II_TXD0	OTG_H S_ID	-	-	EVEN TOUT
PB 13	-	TMR1_ CH1N	-	-	-	SPI2_SCK I2S2_CK	-	USART 3_CTS	-	CAN2_ TX	OTG_HS_ ULPI_D6	ETH_RM II_TXD1	-	-	-	EVEN TOUT
PB 14	-	TMR1_ CH2N	-	TMR8_ CH2N	-	SPI2_MIS O	I2S2ext_S D	USART 3_RTS	-	TMR1 2_CH1	-	-	OTG_H S_DM	-	-	EVEN TOUT
PB 15	RTC_REF IN	TMR1_ CH3N	-	TMR8_ CH3N	-	SPI2_MOS I2S2_SD	-	-	-	TMR1 2_CH2	-	-	OTG_H S_DP	-	-	EVEN TOUT

Table 6 GPIOC Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PC0	-	-	-	-	-	-	-	-	-	-	OTG_HS_U LPI_STP	-	-	-	-	EVENT OUT
PC1	-	-	-	-	-	-	-	-	-	-	ETH_MDC	-	-	-	-	EVENT OUT
PC2	-	-	-	-	-	SPI2_MI SO	I2S2ext_SD	-	-	-	OTG_HS_U LPI_DIR	ETH_MII_T XD2	-	-	-	EVENT OUT
PC3	-	-	-	-	-	SPI2_M OSI I2S2_SD	-	-	-	-	OTG_HS_U LPI_NXT	ETH_MII_TX_CLK	-	-	-	EVENT OUT
PC4	-	-	-	-	-	-	-	-	-	-	ETH_MII_RXD0	ETH_RMII_RXD0	-	-	-	EVENT OUT
PC5	-	-	-	-	-	-	-	-	-	-	ETH_MII_RXD1	ETH_RMII_RXD1	-	-	-	EVENT OUT
PC6	-	-	TMR3_CH1	TMR8_CH1	-	I2S2_M CK	-	-	USART6_TX	-	-	-	SDIO_D6	DCI_D0	-	EVENT OUT
PC7	-	-	TMR3_CH2	TMR8_CH2	-	-	I2S3_M CK	-	USART6_RX	-	-	-	SDIO_D7	DCI_D1	-	EVENT OUT

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PC8	-	-	TMR3_CH3	TMR8_CH3	-	-	-	-	USART6_CK	-	-	-	SDIO_D0	DCI_D2	-	EVENT OUT
PC9	MC O2	-	TMR3_CH4	TMR8_CH4	I2C3_S DA	I2S_CKIN	-	-	-	-	-	-	SDIO_D1	DCI_D3	-	EVENT OUT
PC10	-	-	-	-	-	-	SPI3_S CK/I2S3_CK	USART3_TX/	UART4_TX	-	-	-	SDIO_D2	DCI_D8	-	EVENT OUT
PC11	-	-	-	-	-	I2S3ext_SD	SPI3_MI SO/	USART3_RX	UART4_RX	-	-	-	SDIO_D3	DCI_D4	-	EVENT OUT
PC12	-	-	-	-	-	-	SPI3_M_OSI_I2S3_SD	USART3_CK	UART5_TX	-	-	-	SDIO_CK	DCI_D9	-	EVENT OUT
PC13	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVENT OUT
PC14	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVENT OUT
PC15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EVENT OUT

Table 7 GPIOD Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PD0	-	-	-	-	-	-	-	-	-	CAN1_RX	-	-	SMC_D2	-	-	EVENTOUT
PD1	-	-	-	-	-	-	-	-	-	CAN1_TX	-	-	SMC_D3	-	-	EVENTOUT
PD2	-	-	TMR3_ETR	-	-	-	-	-	UART5_RX	-	-	-	SDIO_CMD	DCI_D11	-	EVENTOUT
PD3	-	-	-	-	-	-	-	USART2_CTS	-	-	-	-	SMC_CLK	-	-	EVENTOUT
PD4	-	-	-	-	-	-	-	USART2 RTS	-	-	-	-	SMC_NOE	-	-	EVENTOUT
PD5	-	-	-	-	-	-	-	USART2_TX	-	-	-	-	SMC_NWE	-	-	EVENTOUT
PD6	-	-	-	-	-	-	-	USART2_RX	-	-	-	-	SMC_NWAIT	-	-	EVENTOUT
PD7	-	-	-	-	-	-	-	USART2_CK	-	-	-	-	SMC_NE1/SMC_NC_E2	-	-	EVENTOUT
PD8	-	-	-	-	-	-	-	USART3_TX	-	-	-	-	SMC_D13	-	-	EVENTOUT

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PD9	-	-	-	-	-	-	-	USART3_RX	-	-	-	-	SMC_D14	-	-	EVENTOUT
PD10	-	-	-	-	-	-	-	USART3_CK	-	-	-	-	SMC_D15	-	-	EVENTOUT
PD11	-	-	-	-	-	-	-	USART3_CTS	-	-	-	-	SMC_A16	-	-	EVENTOUT
PD12	-	-	TMR4_CH1	-	-	-	-	USART3 RTS	-	-	-	-	SMC_A17	-	-	EVENTOUT
PD13	-	-	TMR4_CH2	-	-	-	-	-	-	-	-	-	SMC_A18	-	-	EVENTOUT
PD14	-	-	TMR4_CH3	-	-	-	-	-	-	-	-	-	SMC_D0	-	-	EVENTOUT
PD15	-	-	TMR4_CH4	-	-	-	-	-	-	-	-	-	SMC_D1	-	-	EVENTOUT

Table 8 GPIOE Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PE0	-	-	TMR4_ETR	-	-	-	-	-	-	-	-	-	SMC_NBL0	DCI_D2	-	EVENTOUT

Port	AF0	AF1	AF2	AF3	AF 4	AF 5	AF 6	AF 7	AF 8	AF 9	AF1 0	AF11	AF12	AF13	AF1 4	AF15
PE1	-	-	-	-	-	-	-	-	-	-	-	-	SMC_NBL 1	DCI_D 3	-	EVENTOU T
PE2	TRACECL K	-	-	-	-	-	-	-	-	-	-	ETH_MII_TXD 3	SMC_A23	-	-	EVENTOU T
PE3	TRACED0	-	-	-	-	-	-	-	-	-	-	-	SMC_A19	-	-	EVENTOU T
PE4	TRACED1	-	-	-	-	-	-	-	-	-	-	-	SMC_A20	DCI_D 4	-	EVENTOU T
PE5	TRACED2	-	-	TMR9_CH 1	-	-	-	-	-	-	-	-	SMC_A21	DCI_D 6	-	EVENTOU T
PE6	TRACED3	-	-	TMR9_CH 2	-	-	-	-	-	-	-	-	SMC_A22	DCI_D 7	-	EVENTOU T
PE7	-	TMR1_ETR	-	-	-	-	-	-	-	-	-	-	SMC_D4	-	-	EVENTOU T
PE8	-	TMR1_CH1 N	-	-	-	-	-	-	-	-	-	-	SMC_D5	-	-	EVENTOU T
PE9	-	TMR1_CH1	-	-	-	-	-	-	-	-	-	-	SMC_D6	-	-	EVENTOU T
PE1 0	-	TMR1_CH2 N	-	-	-	-	-	-	-	-	-	-	SMC_D7	-	-	EVENTOU T
PE1 1	-	TMR1_CH2	-	-	-	-	-	-	-	-	-	-	SMC_D8	-	-	EVENTOU T
PE1 2	-	TMR1_CH3 N	-	-	-	-	-	-	-	-	-	-	SMC_D9	-	-	EVENTOU T
PE1 3	-	TMR1_CH3	-	-	-	-	-	-	-	-	-	-	SMC_D10	-	-	EVENTOU T

Port	AF0	AF1	AF2	AF3	AF 4	AF 5	AF 6	AF 7	AF 8	AF 9	AF1 0	AF11	AF12	AF13	AF1 4	AF15
PE1 4	-	TMR1_CH4	-	-	-	-	-	-	-	-	-	-	SMC_D11	-	-	EVENTOU T
PE1 5	-	TMR1_BKI N	-	-	-	-	-	-	-	-	-	-	SMC_D12	-	-	EVENTOU T

Table 9 GPIOF Multiplexing Function Configuration

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
PF0	-	-	-	-	I2C2_SDA	-	-	-	-	-	-	-	SMC_A0	-	-	EVENTOUT
PF1	-	-	-	-	I2C2_SCL	-	-	-	-	-	-	-	SMC_A1	-	-	EVENTOUT
PF2	-	-	-	-	I2C2_SMBA	-	-	-	-	-	-	-	SMC_A2	-	-	EVENTOUT
PF3	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A3	-	-	EVENTOUT
PF4	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A4	-	-	EVENTOUT
PF5	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A5	-	-	EVENTOUT
PF6	-	-	-	TMR10_CH1	-	-	-	-	-	-	-	-	SMC_NIORD	-	-	EVENTOUT
PF7	-	-	-	TMR11_CH1	-	-	-	-	-	-	-	-	SMC_NREG	-	-	EVENTOUT
PF8	-	-	-	-	-	-	-	-	TMR13_CH1	-	-	-	SMC_NIOWR	-	-	EVENTOUT
PF9	-	-	-	-	-	-	-	-	TMR14_CH1	-	-	-	SMC_CD	-	-	EVENTOUT
PF10	-	-	-	-	-	-	-	-	-	-	-	-	SMC_INTR	-	-	EVENTOUT
PF11	-	-	-	-	-	-	-	-	-	-	-	-	-	DCI_D12	-	EVENTOUT
PF12	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A6	-	-	EVENTOUT
PF13	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A7	-	-	EVENTOUT
PF14	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A8	-	-	EVENTOUT
PF15	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A9	-	-	EVENTOUT

Table 10 GPIOG Multiplexing Function Configuration

Port	AF 0	AF 1	AF 2	AF 3	AF 4	AF 5	AF 6	AF 7	AF8	AF 9	AF1 0	AF11	AF12	AF13	AF1 4	AF15
PG0	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A10	-	-	EVENTOUT
PG1	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A11	-	-	EVENTOUT
PG2	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A12	-	-	EVENTOUT
PG3	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A13	-	-	EVENTOUT
PG4	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A14	-	-	EVENTOUT
PG5	-	-	-	-	-	-	-	-	-	-	-	-	SMC_A15	-	-	EVENTOUT
PG6	-	-	-	-	-	-	-	-	-	-	-	-	SMC_INT2	-	-	EVENTOUT
PG7	-	-	-	-	-	-	-	-	USART6_CK	-	-	-	SMC_INT3	-	-	EVENTOUT
PG8	-	-	-	-	-	-	-	-	USART6_RT S	-	-	ETH_PPS_OUT		-	-	EVENTOUT
PG9	-	-	-	-	-	-	-	-	USART6_RX	-	-	-	SMC_NE2/SMC_NCE3	-	-	EVENTOUT
PG1 0	-	-	-	-	-	-	-	-	-	-	-	-	SMC_NCE4_1/SMC_N E3	-	-	EVENTOUT
PG1 1	-	-	-	-	-	-	-	-	-	-	-	ETH_MII_TX_EN ETH_RMII_TX_E N	SMC_NCE4_2	-	-	EVENTOUT

Port	AF 0	AF 1	AF 2	AF 3	AF 4	AF 5	AF 6	AF 7	AF8	AF 9	AF1 0	AF11	AF12	AF13	AF1 4	AF15
PG1 2	-	-	-	-	-	-	-	-	USART6_RT S	-	-	-	SMC_NE4	-	-	EVENTOU T
PG1 3	-	-	-	-	-	-	-	-	USART6_CT S	-	-	ETH_MII_TXD0 ETH_RMII_TXD0	SMC_A24	-	-	EVENTOU T
PG1 4	-	-	-	-	-	-	-	-	USART6_TX	-	-	ETH_MII_TXD1 ETH_RMII_TXD1	SMC_A25	-	-	EVENTOU T
PG1 5	-	-	-	-	-	-	-	-	USART6_CT S	-	-	-		DCL_D1 3	-	EVENTOU T

## 4 Function Description


This chapter mainly introduces the system architecture, interrupt, on-chip memory, clock, power supply and peripheral features of APM32A407xGT7 series products; for information about the Arm® Cortex®-M4 core, please refer to the *Arm® Cortex®-M4 Technical Reference Manual*, which can be downloaded from Arm's website.

At present, APM32F407ZGT7 has passed AEC-Q100 Grade1 certification, APM32F407VGT7 has passed AEC-Q100 Grade 2 certification.

## 4.1 System architecture


### 4.1.1 System block diagram

Figure 3 APM32A407xGT7 System Block Diagram

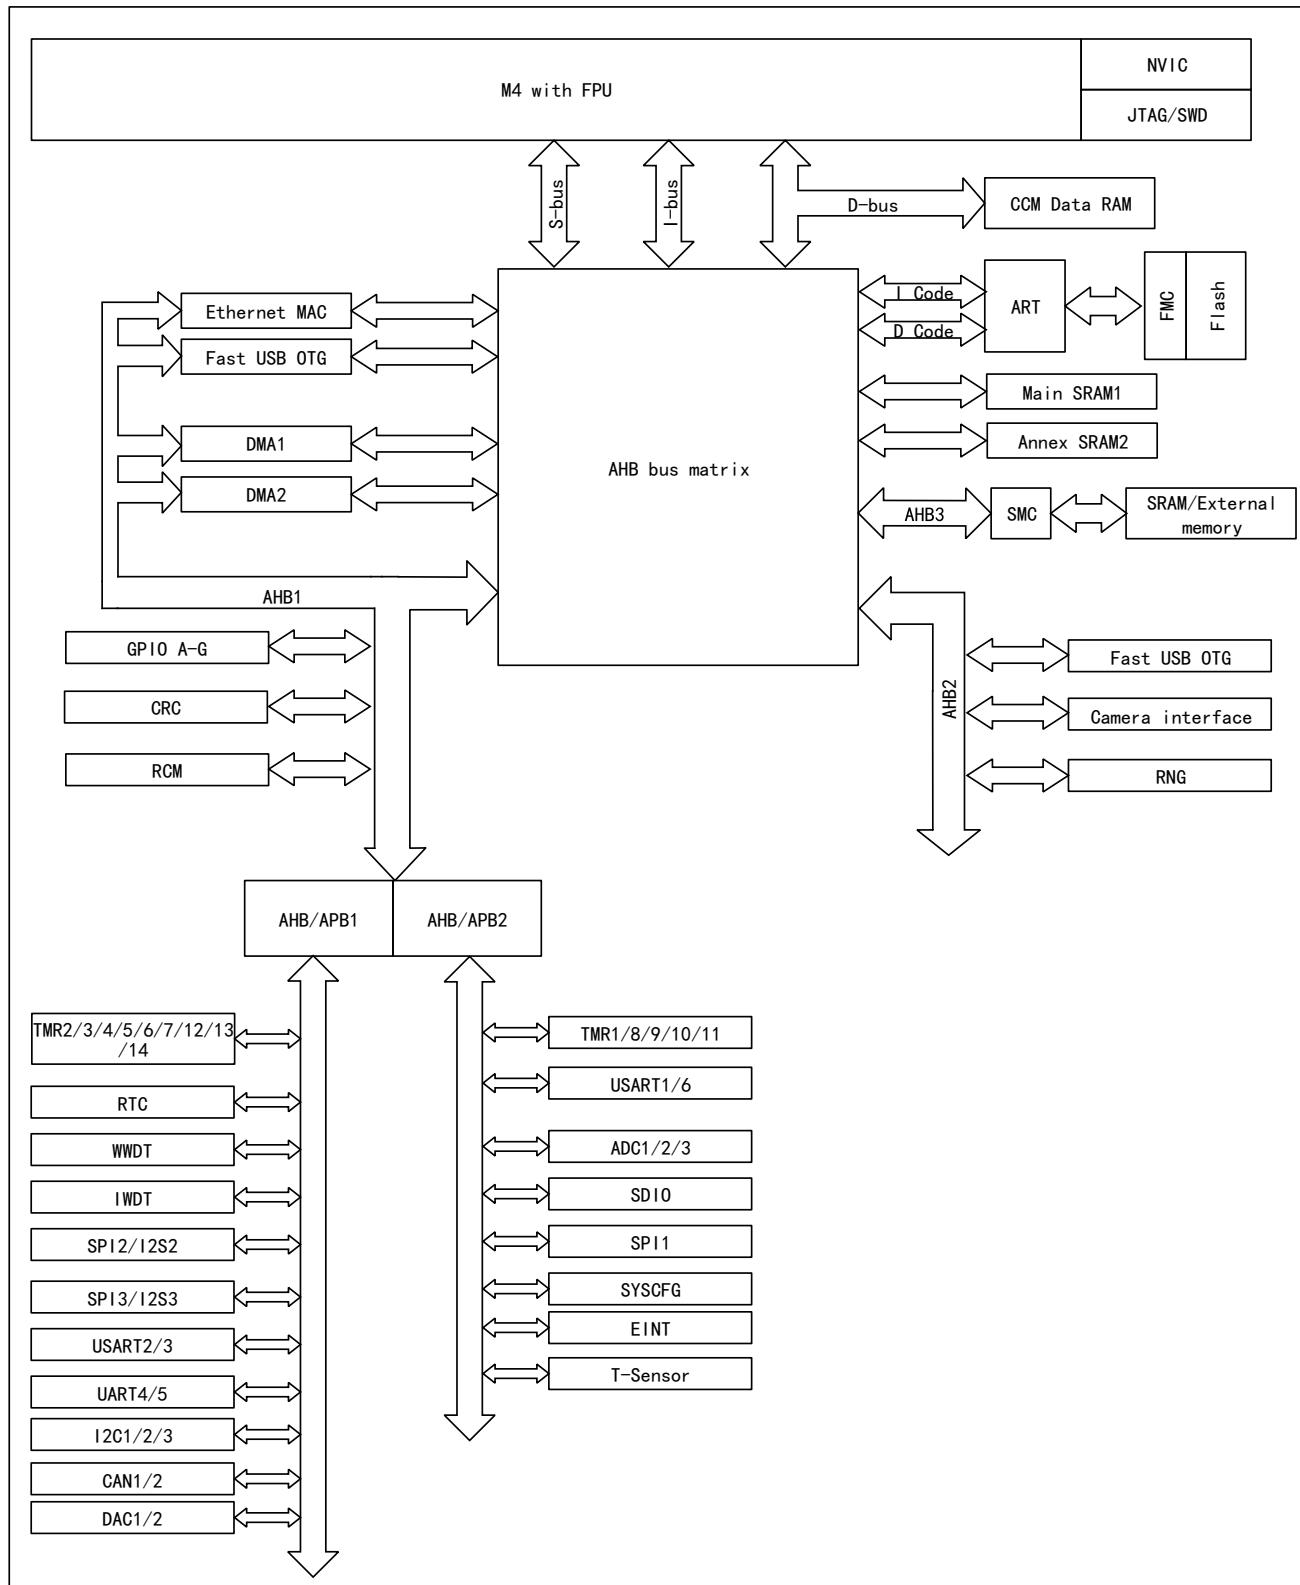

### 4.1.2 Address mapping

Figure 4 APM32A407xGT7 Series Address Mapping Diagram

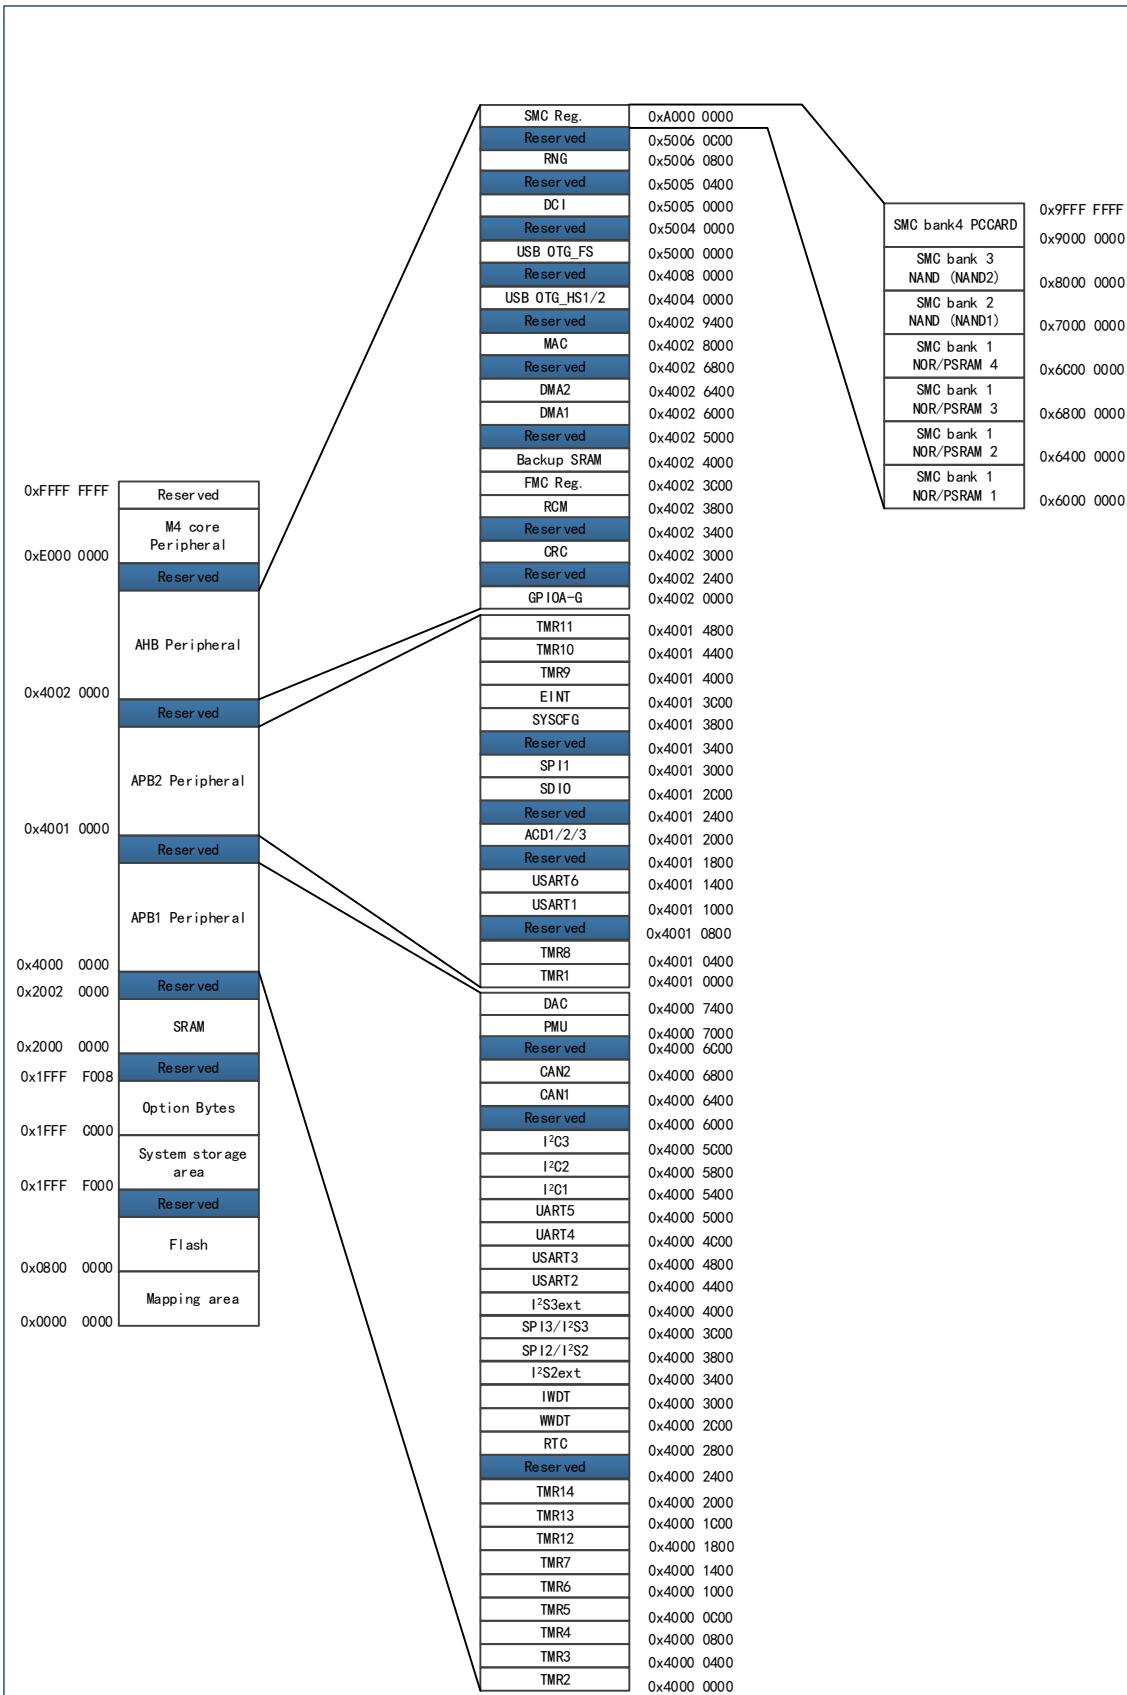

#### 4.1.3 Startup configuration

At startup, the user can select one of the following three startup modes by setting the high and low levels of the Boot pin:

- Startup from main memory
- Startup from BootLoader
- Startup from built-in SRAM

The user can use serial interface to reprogram the user Flash if starting up from BootLoader.

### 4.2 Core

The core of APM32A407xGT7 is Arm® Cortex®-M4 with FPU computing unit. Based on this platform, the development cost is low and the power consumption is low. It can provide excellent computing performance and advanced system interrupt response, and is compatible with all Arm tools and software.

### 4.3 Interrupt controller

#### 4.3.1 Nested Vector Interrupt Controller (NVIC)

It embeds a nested vectored interrupt controller (NVIC) that can handle up to 82 maskable interrupt channels (not including 16 interrupt lines of Cortex®-M4) and 8 priority levels. The interrupt vector entry address can be directly transmitted to the core, so that the interrupt response processing with low delay can give priority to the late higher priority interrupt.

#### 4.3.2 External Interrupt/Event Controller (EINT)

The external interrupt/event controller consists of 23 edge detectors, and each detector includes edge detection circuit and interrupt/event request generation circuit; each detector can be configured as rising edge trigger, falling edge trigger or both and can be masked independently. Up to 114 GPIOs can be connected to 16 external interrupt lines.

### 4.4 On-chip memory

On-chip memory includes main memory area, SRAM and information block; the information block includes system memory area and option byte; the system memory area stores BootLoader, 96-bit unique device ID and capacity information of main memory area; the system memory area has been written into the program when leaving the factory and cannot be erased.

Table 11 On-chip Memory Area

Memory	Maximum capacity	Function
Main memory area	1MB	Store user programs and data
SRAM	192 KB(System)+4KB(backup)	CPU can access at 0 wait cycle (read/write)
System memory area	30KB	Store BootLoader, 96-bit unique device ID, and main memory area capacity information

Memory	Maximum capacity	Function
Option byte	16Bytes	Configure main memory area read-write protection and MCU working mode

#### 4.4.1 Static memory controller (SMC)

APM32A407xGT7 series integrates SMC module, consists of SMC (static memory controller), supports PC card, SRAM, PSRAM, NorFlash and NandFlash.

Function introduction:

- Connected to NVIC unit through logic or
- Write FIFO
- The code can run in off-chip memories except NAND flash and PC card
- Connect to LCD

#### 4.4.2 LCD parallel interface (LCD)


EMMC can be configured to seamlessly connect with most graphic LCD controllers, and supports the modes of Intel 8080 and Motorola 6800, and can flexibly connect with specific LCD interface. This LCD parallel interface can be used to easily build a simple graphics application environment or the high-performance scheme of the special acceleration controller can be used.

### 4.5 Clock

#### 4.5.1 Clock tree

Clock tree of APM32A407xGT7 is shown in the figure below:

Figure 5 APM32A407xGT7 Clock Tree

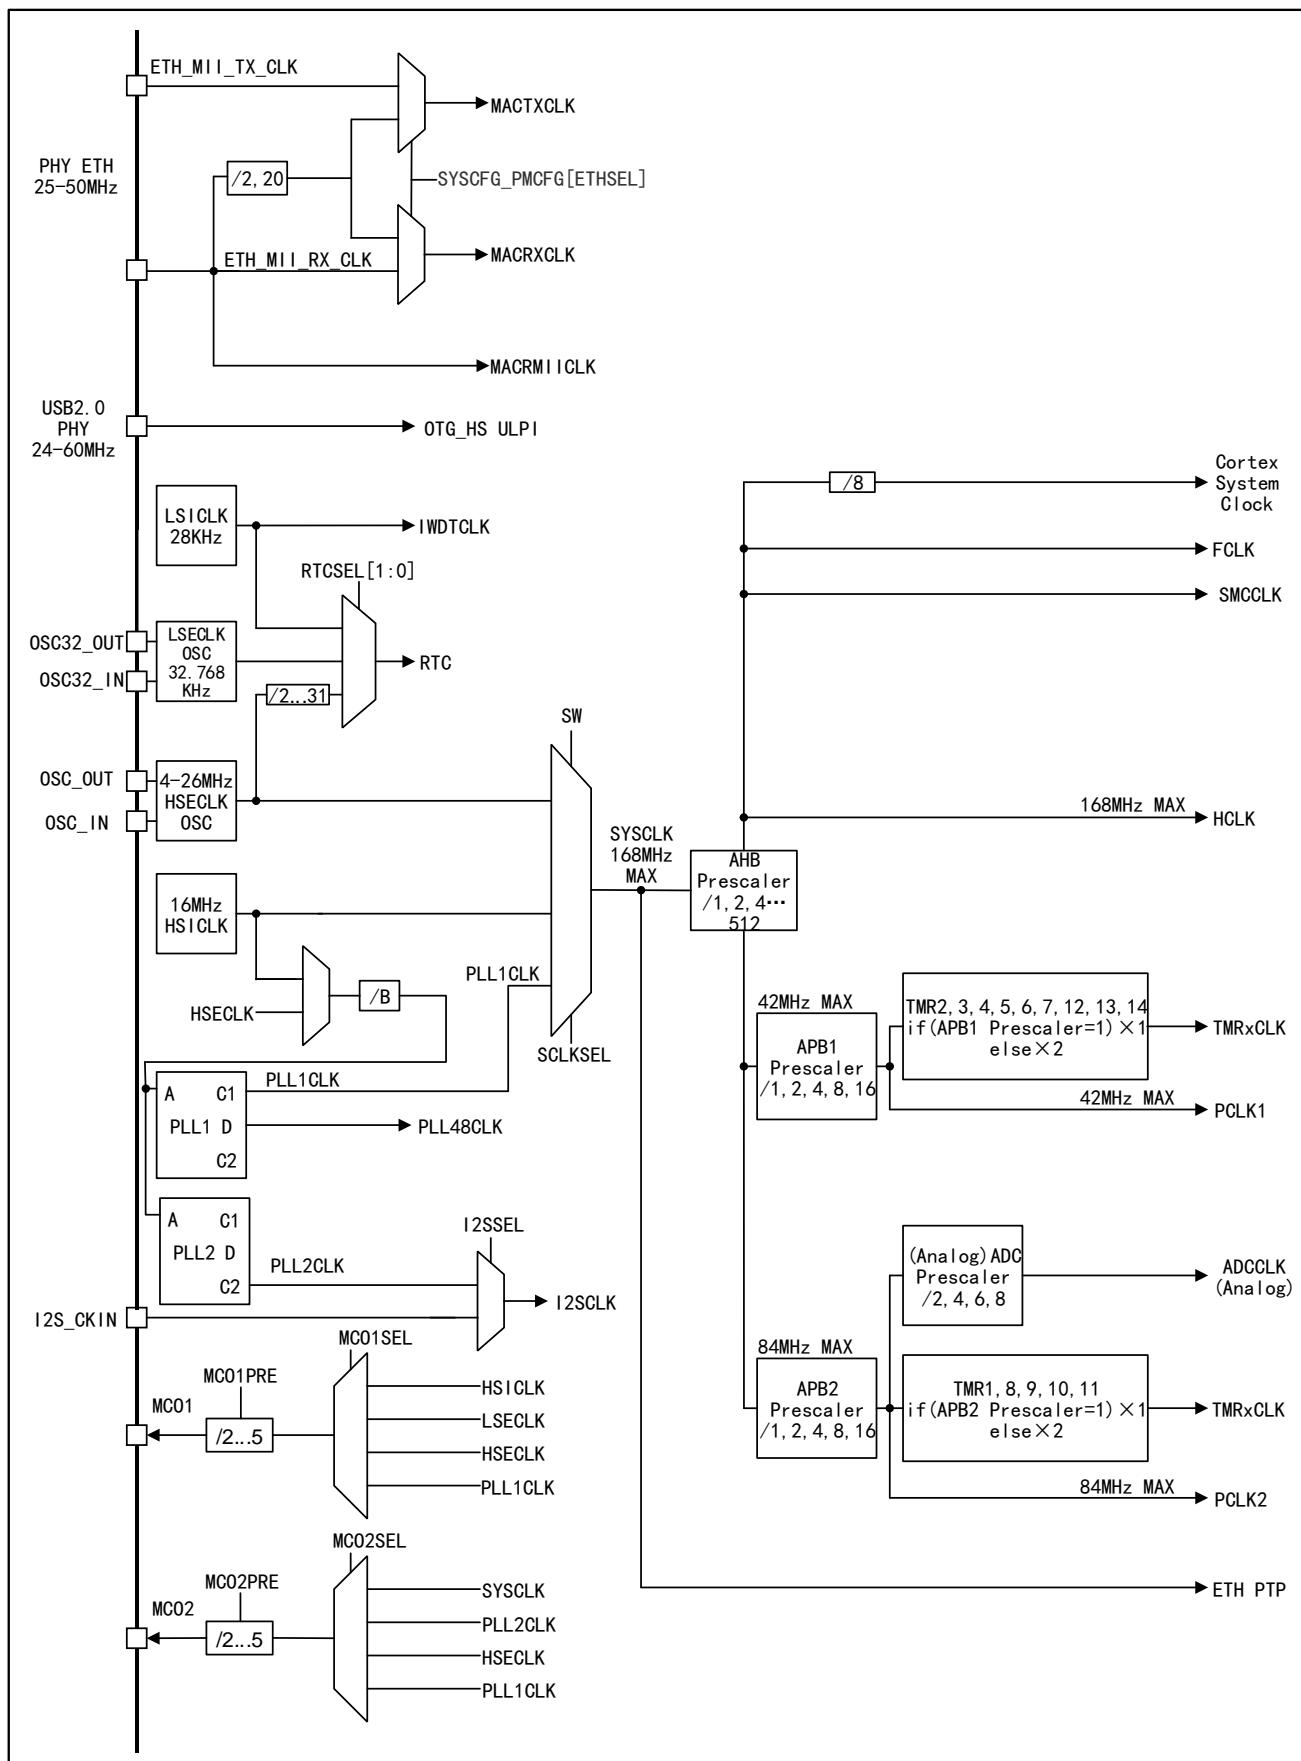

#### 4.5.2 Clock source

Clock source is divided into high-speed clock and low-speed clock according to the speed; the high-speed clock includes HSICLK and HSECLK, and the low-speed clock includes LSECLK and LSICLK; besides, some modules may have additional clock source pins to obtain the required clock frequency through external circuits.

#### 4.5.3 System clock

HSICLK, PLLCLK and HSECLK can be selected as system clock; the clock source of PLLCLK can be HSICLK or HSECLK; the required system clock can be obtained by configuring PLL clock multiplier factor and frequency division factor.

When the product is reset and started, HSICLK is selected as the system clock by default, and then the user can choose one of the above clock sources as the system clock. When HSECLK failure is detected, the system will automatically switch to the HSICLK, and if an interrupt is enabled, the software can receive the related interrupt.

#### 4.5.4 Bus clock

AHB, APB1 and APB2 buses are built in. The clock source of AHB is SYSCLK, and the clock source of APB1 and APB2 is HCLK; the required clock can be obtained by configuring the frequency division factor. The maximum frequency of AHB is 168MHz, the maximum frequency of APB2 is 84MHz, and the maximum frequency of APB1 is 42MHz.

#### 4.5.5 Phase locked loop

APM32A407xGT7 series product has two PLL, one is PLL (PLL1), and the other is PLL (PLL2) specially used to provide specific clock frequency for I2S. They all need to generate different clock frequencies by configuring parameters. Please refer to the *User Manual* for specific parameters and configuration registers.

### 4.6 Power and power management

#### 4.6.1 Power supply scheme

Table 12 Power Supply Scheme

Name	Voltage range	Description
$V_{DD}$	1.8~3.6V	I/O (see pin distribution diagram for specific IO) and internal voltage regulator are powered through $V_{DD}$ pin.
$V_{DDA}/V_{SSA}$	1.8~3.6V	Supply power for ADC, DAC, reset module, RC oscillator and PLL analog part; when ADC or DAC is used, $V_{DDA}$ and $V_{SSA}$ must be connected to $V_{DD}$ and $V_{SS}$ .
$V_{BAT}$	1.8~3.6V	When $V_{DD}$ is disabled, RTC, external 32KHz oscillator and backup register are powered through internal power switch.

#### 4.6.2 Voltage regulator

Table 13 Regulator Operating Mode

Name	Description
Master mode (MR)	Used in run mode
Low-power mode (LPR)	Used in stop mode
Power-down mode	Used in standby mode; when the voltage regulator has high-impedance output, the core circuit is powered down, the power consumption of the voltage regulator is zero, and all data of registers and SRAM will be lost.

Note: The voltage regulator is always in working state after reset, and outputs with high impedance in power-down mode.

#### 4.6.3 Power supply voltage monitor

Power-on reset (POR), power-down reset (PDR) and brown-out reset (BOR) circuits are integrated inside the product. These three circuits are always in working condition. When the power-down reset circuit monitors that the power supply voltage is lower than the specified threshold value ( $V_{POR/PDR}$ ), even if the external reset circuit is used, the system will remain reset.

The product has a built-in programmable power supply voltage monitor (PWD) that can monitor  $V_{DD}$  and compare it with  $V_{PWD}$  threshold. When  $V_{DD}$  is outside the  $V_{PWD}$  threshold range and the interrupt is enabled, the MCU can be set to a safe state through the interrupt service program.

### 4.7 Low-power mode

APM32A407xGT7 supports three low-power modes, namely, sleep mode, stop mode and standby mode, and there are differences in power, wake-up time and wake-up mode among these three modes. The low-power mode can be selected according to the actual application requirements.

Table 14 Low-power Mode

Mode	Description
Sleep mode	The core stops working, all peripherals are working, and it can be woken up through interrupts/events
Stop mode	Under the condition that SRAM and register data are not lost, the lowest power consumption can be achieved in stop mode; The clock of the internal 1.3V power supply module will stop, HSECLK crystal resonator, HSICLK and PLL will be disabled, and the voltage regulator can be configured in normal mode or low-power mode; Any external interrupt line can wake up MCU, and the external interrupt lines include one of the 16 external interrupt lines, PWD output, RTC and USB_OTG.
Standby mode	The power consumption in this mode is the lowest; Internal voltage regulator is turned off, all 1.3V power supply modules are powered down, HSECLK crystal resonator, and HSICLK clocks are disabled, SRAM and register data disappear, RTC area and backup register contents remain, and the standby circuit still works;

Mode	Description
	The external reset signal on NRST, IWDT reset, rising edge on WKUP pin or RTC event will wake MCU out of standby mode.

## 4.8 DMA

2 built-in DMA, 16 data streams in total. Each data stream corresponds to 8 channels, but each data stream can only use 1 channel at the same time. The peripherals supporting DMA requests are ADC, SPI, USART, I2C, and TMRx. Four levels of DMA channel priority can be configured. Support "memory→memory, memory→peripheral, peripheral→memory" data transmission (the memory includes Flash、SRAM、SDRAM).

## 4.9 GPIO

GPIO can be configured as general input, general output, multiplexing function and analog input and output. The general input can be configured as floating input, pull-up input and pull-down input; the general output can be configured as push-pull output and open-drain output; the multiplexing function can be used for digital peripherals; and the analog input and output can be used for analog peripherals and low-power mode; the enable and disable pull-up/pull-down resistor can be configured; the speed of 2MHz, 10MHz and 50MHz can be configured; the higher the speed is, the greater the power and the noise will be.

## 4.10 Communication peripherals

### 4.10.1 USART/UART

Up to 6 universal synchronous/asynchronous transmitter receivers are built in the chip. The USART1/6 interfaces can communicate at a rate of 10.5Mbit/s, while other USART/UART interfaces can communicate at a rate of 5.25Mbit/s. All USART/UART interfaces can configure baud rate, parity check bit, stop bit, and data bit length; they all can support DMA.

USART/UART function differences are shown in the table below:

Table 15 USART/UART Function Differences

USART mode/function	USART1	USART2	USART3	UART4	UART5	USART6
Hardware flow control of modem	√	√	√	—	—	√
Smart card mode	√	√	√	—	—	√
IrDA SIR coder-encoder functions	√	√	√	√	√	√
LIN mode	√	√	√	√	√	√
Standard characteristics	√	√	√	√	√	√
SPI host	√	√	√	—	—	√
Maximum baud rate under 16-time oversampling (Mbit/s)	5.25	2.62	2.62	2.62	2.62	5.25

USART mode/function	USART1	USART2	USART3	UART4	UART5	USART6
Maximum baud rate under 8-time oversampling (Mbit/s)	10.50	5.25	5.25	5.25	5.25	10.5
APB mapping	APB2	APB1	APB1	APB1	APB1	APB2

Note: √ = support.

#### 4.10.2 I2C

I2C1/2/3 bus interfaces are built-in and they all can work in multiple-master or slave modes, support 7-bit or 10-bit addressing, and support dual-slave addressing in 7-bit slave mode; the communication rate supports standard mode (up to 100kbit/s) and fast mode (up to 400kbit/s); hardware CRC generator/checker are built in; they can operate with DMA and support SMBus 2.0 version/PMBus.

#### 4.10.3 SPI/I2S

3 built-in SPI, support full-duplex and half-duplex communication in master mode and slave mode, can use DMA controller, and can configure 4~16 bits per frame, and 3 SPI can communicate at a rate of up to 42Mbit/s, 21MBit/s and 21MBit/s respectively.

2 built-in I2S (multiplexed with SPI2 and SPI3 respectively), support half-duplex communication in master mode and slave mode, support synchronous transmission, and can be configured with 16-bit, 24-bit and 32-bit data transfer with 16-bit or 32-bit resolution. The configurable range of audio sampling rate is 8kHz~192kHz; when one or two I2S interfaces are configured as the master mode, the master clock can be output to external DAC or decoder (CODEC) at 256-time sampling frequency.

#### 4.10.4 CAN

2 built-in CAN, compatible with 2.0A and 2.0B (active) specification, and can communicate at a rate of up to 1Mbit/s. It can receive and transmit standard frame of 11-bit identifier and extended frame of 29-bit identifier. It has 3 sending mailboxes and 2 receiving FIFO, and 14 3-level adjustable filters.

#### 4.10.5 USB\_OTG

Three USB controllers, namely, one OTG\_FS and two OTG\_HS, are embedded in the product. They all can support both host and slave functions to comply with the On-The-Go supplementary standard of USB 2.0 specification, and can also be configured as "Host only" or "Slave only" mode, to fully comply with USB 2.0 specification. OTG\_FS clock (48MHz) is output by specific PLL, and OTG\_HS clock (60MHz) is provided by external PHY.

#### 4.10.6 Ethernet

Provides an IEEE-802.3-2002 compatible MAC for Ethernet LAN communication over MII or RMII. This MCU requires a PHY connection to a physical LAN bus. The PHY connects to the MII port, uses 17 signals for MII or 9 signals for RMII, and can use a 25MHz clock (MII) from the kernel.

#### 4.10.7 SDIO

The secure digital input/output interface can connect SD card, SD I/O card, multi-media card (MMC) and CE-ATA card master interfaces, and provide data transmission between APB2 system bus and SD memory card, SD I/O card, MMC and CE-ATA device.

### 4.11 Analog peripherals

#### 4.11.1 ADC

3 built-in ADC with 12-bit accuracy, up to 21 external channels and 3 internal channels for each ADC. The internal channels measure the temperature sensor voltage, reference voltage and backup voltage respectively. A/D conversion mode of each channel has single, continuous, scan or intermittent modes, ADC conversion results can be left aligned or right aligned and stored in 16-bit data register; they support analog watchdog, and DMA.

##### 4.11.1.1 Temperature sensor

1 temperature sensor (TSensor) is built in, which is internally connected with ADC\_IN16 channel. The voltage generated by the sensor changes linearly with temperature and the converted voltage value can be obtained by ADC and converted into temperature.

##### 4.11.1.2 Internal reference voltage

Built-in reference voltage  $V_{REFINT}$ , internally connected to ADC\_IN17 channel;  $V_{REFINT}$  can be obtained through ADC;  $V_{REFINT}$  provides stable voltage output for ADC.

#### 4.11.2 DAC

2 built-in 12-bit DAC, each corresponding to an output channel, which can be configured as 8-bit and 12-bit modes, and the DMA function is supported. The waveform generation supports noise wave and triangle wave. The conversion mode supports independent or simultaneous conversion and the trigger mode supports external signal trigger and internal timer update trigger.

### 4.12 Timer

2 built-in 16-bit advanced timers (TMR1/8), 8 16-bit general-purpose timers (TMR3/4/9/10/11/12/13/14), 2 32-bit general timers (TMR2/5), 2 16-bit basic timers (TMR6/7), 1 independent watchdog timer, 1 window watchdog timer and 1 system tick timer.

Watchdog timer can be used to detect whether the program is running normally.

The system tick timer is the peripheral of the core with automatic reloading function. When the counter is 0, it can generate a maskable system interrupt, which can be used for real-time operating system and general delay.

Table 16 Function Comparison between Advanced/General-purpose/Basic and System Tick Timers

Timer type	System tick timer	Basic timer	General-purpose timer	Advanced timer
Timer name	Sys Tick Timer	TMR6/7	TMR2/5 TMR3/4/9/10/1 1/12/13/14	TMR1/8
Counter resolution	24 bits	16 bits	32 bits	16 bits
Counter type	Down	Up	Up, down, up/down	Up, down, up/down
Prescaler factor	-	Any integer between 1 and 65536	Any integer between 1 and 65536	Any integer between 1 and 65536
Generate DMA request	-	OK	OK	OK
Capture/comp are register	-	-	4	4
Complementary output	-	None	None	Yes
Pin characteristics	-	-	1-way external trigger signal input pin; 1-way braking input signal pin; 4-way non-complementary channel pin.	1-way external trigger signal input pin; 1-way braking input signal pin; 3-pair complementary channel pins; 1-way non-complementary channel pin.
Function Description	Special for real-time operating system. Automatic reloading function supported. When the counter is 0, it can generate a maskable system interrupt. Can program the clock source.	Used to generate DAC trigger signals. Can be used as a 16-bit general-purpose timebase counter.	Synchronization or event chaining function provided. Timers in debug mode can be frozen. Can be used to generate PWM output. Each timer has independent DMA request mechanism. It can handle incremental encoder signals.	It has complementary PWM output with dead band insertion. When configured as a 16-bit standard timer, it has the same function as the TMRx timer. When configured as a 16-bit PWM generator, it has full modulation capability (0~100%). In debug mode, the timer can be frozen, and PWM output is disabled. Synchronization or event chaining function provided.

Table 17 Function Comparison between IWDT and WWDT

Name	Counter resolution	Counter type	Prescaler factor	Function description
Independent watchdog	12 bits	Down	Any integer between 1 and 256	<p>The clock is provided by an internally independent RC oscillator of 28KHz, which is independent of the master clock, so it can run in stop and standby modes.</p> <p>The whole system can be reset in case of problems.</p> <p>It can provide timeout management for applications as a free-running timer.</p> <p>It can be configured as a software or hardware startup watchdog through option bytes.</p> <p>Timers in debug mode can be frozen.</p>
Window watchdog	7 bits	Down	-	<p>Can be set for free running.</p> <p>The whole system can be reset in case of problems.</p> <p>Driven by the master clock, it has early interrupt warning function;</p> <p>Timers in debug mode can be frozen.</p>

## 4.13 RTC

1 RTC is built in, and there are LSECLK signal input pins (OS32\_IN and OS32\_OUT) and 2 TAMP input signal detection pins (RTC\_TAMP1/2); the clock source can select external 32.768kHz crystal oscillator, resonator or oscillator, LSICLK and HSECLK/128; it is powered by  $V_{DD}$  by default; when  $V_{DD}$  is powered off, it can be automatically switched to  $V_{BAT}$  power supply, and RTC configuration and time data will not be lost; RTC configuration and time data will not be lost in case of system reset, software reset and power-on reset; it supports clock and calendar functions.

### 4.13.1 Backup domain

4KB backup SRAM and 20 backup registers are built in, and are powered by  $V_{DD}$  by default; when  $V_{DD}$  is powered off, it can be automatically switched to  $V_{BAT}$  power supply, and the data in backup register will not be lost; the data in backup register will not be lost in case of system reset, software reset and power-on reset.

## 4.14 RNG

A RNG is embedded, and it provides 32-bit random number generated by the integrated simulation.

## 4.15 DCI

DCI is used to receive high-speed data streams from CMOS camera. It supports different data formats and is applicable to black-and-white cameras, X24 cameras and so on.

## 4.16 CRC

1 CRC (cyclic redundancy check) computing unit is built in, which can generate CRC codes and operate 8-bit, 16-bit and 32-bit data.

# 5 Electrical Characteristics

## 5.1 Test conditions of electrical characteristics

### 5.1.1 Maximum and minimum values

Unless otherwise specified, all products are tested on the production line at  $T_A=25^\circ\text{C}$ . Its maximum and minimum values can support the worst environmental temperature, power supply voltage and clock frequency.

In the notes at the bottom of each table, it is stated that the data are obtained through comprehensive evaluation, design simulation or process characteristics and are not tested on the production line; on the basis of comprehensive evaluation, after passing the sample test, take the average value and add and subtract three times the standard deviation (average  $\pm 3\Sigma$ ) to get the maximum and minimum values.

### 5.1.2 Typical value


Unless otherwise specified, typical data are measured based on  $T_A=25^\circ\text{C}$ ,  $V_{DD}=V_{DDA}=3.3\text{V}$ . These data are only used for design guidance.

### 5.1.3 Typical curve

Unless otherwise specified, typical curves will only be used for design guidance and will not be tested.

### 5.1.4 Power supply scheme

Figure 6 Power Supply Scheme

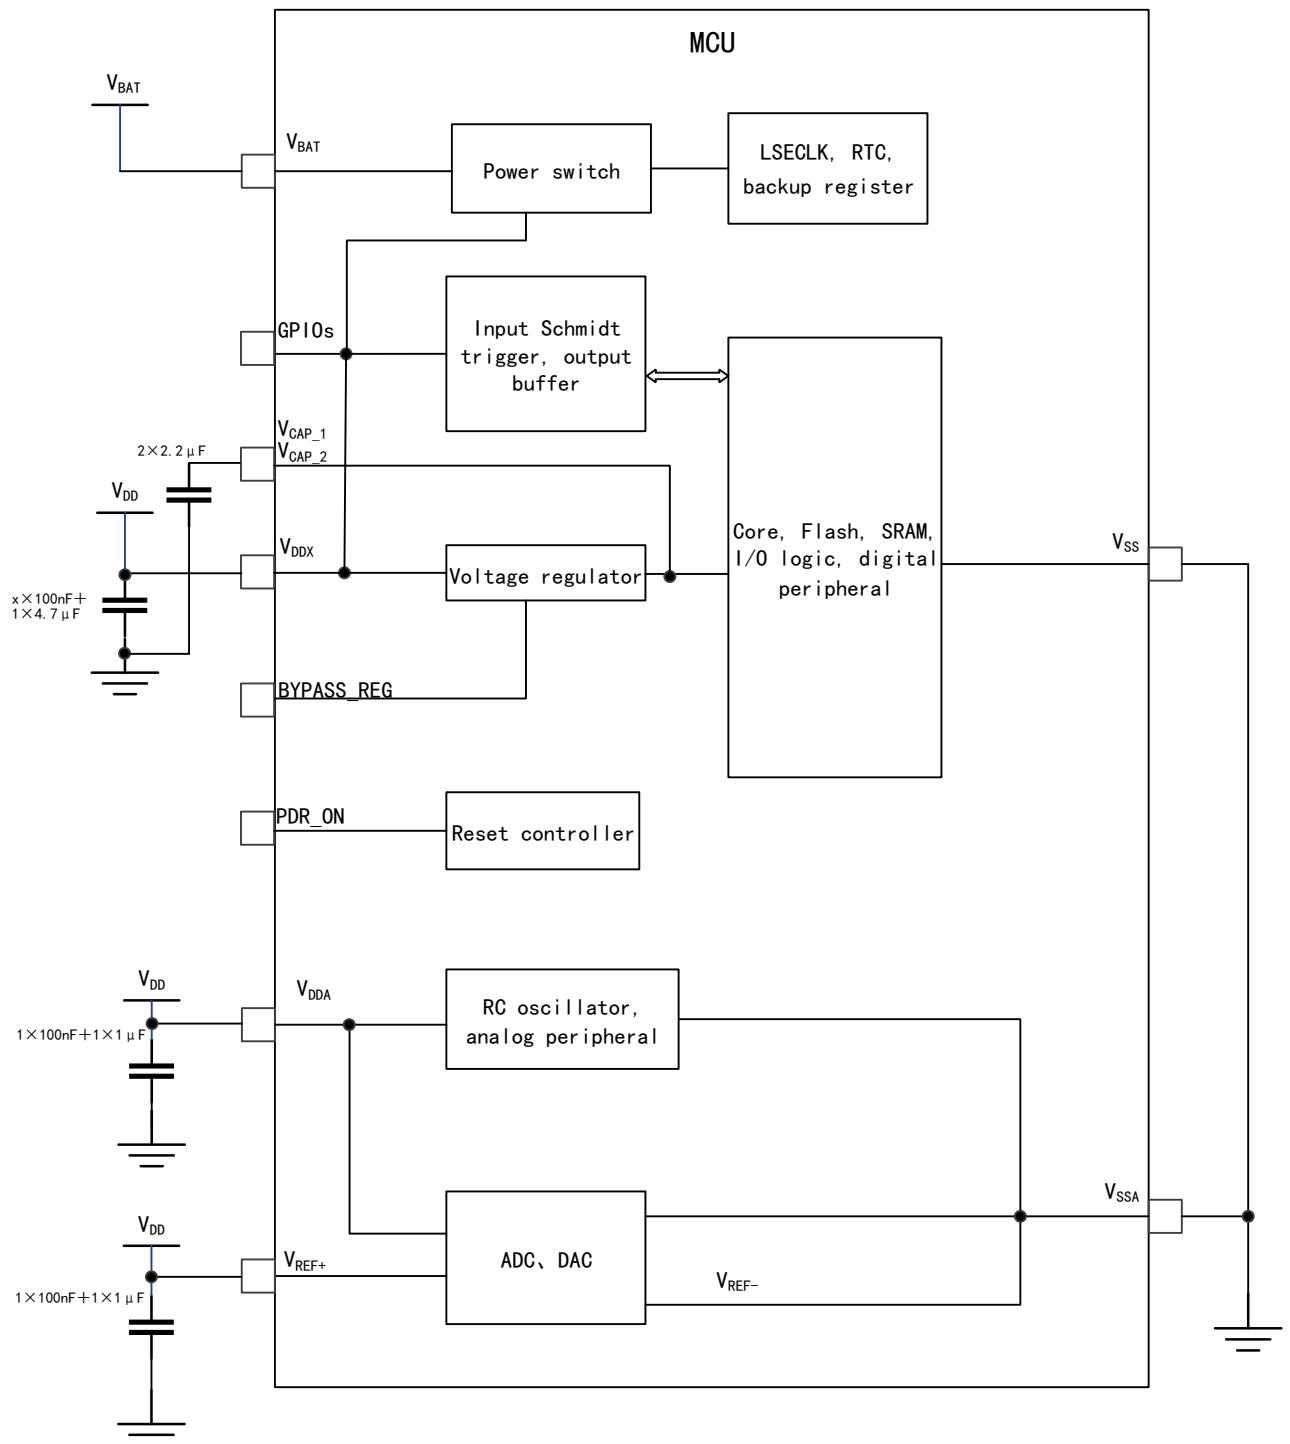

Notes:  $V_{DDX}$  in the figure means the number of  $V_{DD}$  is  $x$

### 5.1.5 Load capacitance

Figure 7 Load conditions when measuring pin parameters

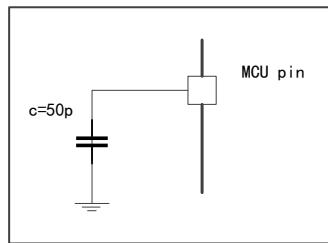


Figure 8 Pin Input Voltage Measurement Scheme


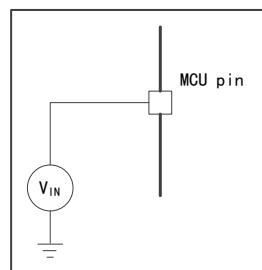


Figure 9 Power Consumption Measurement Scheme

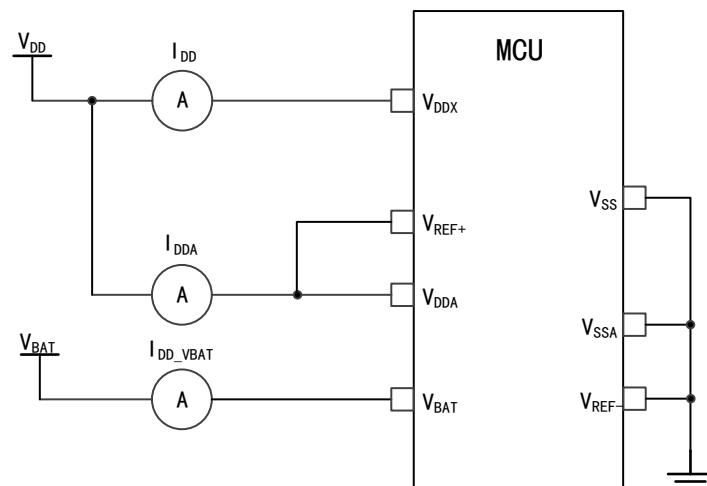

## 5.2 Test under general operating conditions

Table 18 General Operating Conditions

Symbol	Parameter	Conditions	Minimum value	Maximum value	Unit
$f_{HCLK}$	Internal AHB clock frequency	-	-	168	MHz
$f_{PCLK1}$	Internal APB1 clock frequency	-	-	42	
$f_{PCLK2}$	Internal APB2 clock frequency	-	-	84	
$V_{DD}$	Main power supply voltage	-	1.8	3.6	V
$V_{DDA}$	Analog power supply voltage	Must be the same	1.8	2.4	V

Symbol	Parameter	Conditions	Minimum value	Maximum value	Unit
	(When neither ADC nor DAC is used)	as V <sub>DD</sub>			
	Analog power supply voltage (When ADC and DAC are used)		2.4	3.6	
V <sub>BAT</sub>	Power supply voltage of backup domain	-	1.65	3.6	V
T <sub>A</sub>	Ambient temperature (temperature number 7)	Maximum power dissipation	-40	105	°C

## 5.3 Absolute maximum ratings

If the load on the device exceeds the absolute maximum rating, it may cause permanent damage to the device. Here, only the maximum load that can be borne is given, and there is no guarantee that the device functions normally under this condition.

### 5.3.1 Maximum temperature characteristics

Table 19 Temperature Characteristics

Symbol	Description	Value	Unit
T <sub>TG</sub>	Storage temperature range	-65 ~ +150	°C
T <sub>J</sub>	Maximum junction temperature	125	°C

### 5.3.2 Maximum rated voltage characteristics

All power supply (V<sub>DD</sub>, V<sub>DDA</sub>) and ground (V<sub>SS</sub>, V<sub>SSA</sub>) pins must always be connected to the power supply within the external limited range.

Table 20 Maximum Rated Voltage Characteristics

Symbol	Description	Minimum value	Maximum value	Unit
V <sub>DD</sub> - V <sub>SS</sub>	External main power supply voltage	-0.3	4.0	V
V <sub>IN</sub>	Input voltage on FT pins	V <sub>SS</sub> -0.3	V <sub>DD</sub> +4	
	Input voltage on other pins	V <sub>SS</sub> -0.3	4.0	
ΔV <sub>DDX</sub>	Voltage difference between different power supply pins	-	50	mV
V <sub>SSx</sub> -V <sub>SS</sub>	Voltage difference between different grounding pins	-	50	

### 5.3.3 Maximum rated current characteristics

Table 21 Current Characteristics

Symbol	Description	Maximum value	Unit
I <sub>VDD</sub>	Total current through V <sub>DD</sub> /V <sub>DDA</sub> power line (supply current) <sup>(1)</sup>	240	mA
I <sub>VSS</sub>	Total current through V <sub>SS</sub> ground line (outflow current) <sup>(1)</sup>	240	

Symbol	Description	Maximum value	Unit
$I_{IO}$	Sink current on any I/O and control pin	25	
	Source current on any I/O and control pin	25	
$I_{INJ(PIN)}^{(2)}$	Injection current of 5T pin	-5/+0	
	Injection current of other pins	±5	
$\Sigma I_{INJ(PIN)}^{(2)}$	Total injection current on all I/O and control pins <sup>(4)</sup>	±25	

1. All power supply ( $V_{DD}$ ,  $V_{DDA}$ ) and ground ( $V_{SS}$ ,  $V_{SSA}$ ) must always be within the allowed range.
2. The outflow current will interfere with the analog performance of the device.
3. I/O cannot be injected positively: when  $V_{IN} < V_{SS}$ ,  $I_{INJ(PIN)}$  cannot exceed the maximum allowable input voltage value.
4. If  $V_{IN}$  exceeds the maximum value,  $I_{INJ(PIN)}$  must be externally limited not to exceed the maximum value. When  $V_{IN} > V_{DD}$ , the current flows into the pins; when  $V_{IN} < V_{SS}$ , the current flows out of the pins.
5. When the current is injected into several I/O ports at the same time, the maximum value of  $\Sigma I_{INJ(PIN)}$  is the sum of instantaneous absolute value of inflow current and outflow current.

### 5.3.4 Electro-static discharge (ESD)

Table 22 ESD Absolute Maximum Ratings

Symbol	Parameter	Conditions	Range	Unit
$V_{ESD(HBM)}$	Electrostatic discharge voltage (human body model)	$T_A=18\sim24^\circ C$ , conforming to AEC-Q100-002-REV-E-2013	±2000	V

Note: The samples are measured by a third-party testing organization and are not tested in production.

### 5.3.5 Static latch-up (LU)

Table 23 Static Latch-up

Symbol	Parameter	Conditions	Type
LU	Class of static latch-up	$T_A=+105^\circ C$ , conforming to AEC-Q100-004-REV-D-2012	Class II A

Note: The samples are measured by a third-party testing organization and are not tested in production.

## 5.4 On-chip memory

### 5.4.1 Flash characteristics

Table 24 Flash Memory Characteristics

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$t_{prog}$	8/16/32-bit programming time	$T_A = -40\sim105^\circ C$ $V_{DD}=2.4\sim3.6V$	-	43	60	μs
$t_{ERASE1}$	Page (16KBytes) erase time	8 bits	-	60	120	ms
		16 bits	-	60	120	
		32 bits	-	60	120	

Symbol	Parameter		Conditions	Minimum value	Typical value	Maximum value	Unit	
$t_{ERASE2}$	Page (64KBytes) erase time	8 bits		-	250	500		
		16 bits		-	250	500		
		32 bits		-	250	500		
$t_{ERASE3}$	Page (128KBytes) erase time	8 bits		-	500	1000		
		16 bits		-	500	1000		
		32 bits		-	500	1000		
$t_{ME}$	Mass erase time	8 bits	$T_A = -40\sim105^\circ C$ $V_{DD}=2.4\sim3.6V$	-	10	20	ms	
		16 bits		-	10	20		
		32 bits		-	10	20		
$V_{prog}$	Voltage of 8-bit programming		$T_A = -40\sim105^\circ C$	1.8	-	3.6	V	
	Voltage of 16-bit programming			2.1	-	3.6		
	Voltage of 32-bit programming			2.7	-	3.6		

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

## 5.5 Clock

### 5.5.1 Characteristics of external clock source

#### 5.5.1.1 High-speed external clock generated by crystal resonator

For detailed parameters (frequency, package, precision, etc.) of crystal resonator, please consult the corresponding manufacturer.

Table 25 HSECLK4~26MHz Oscillator Characteristics

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$f_{osc\_IN}$	Oscillator frequency	-	4	8	26	MHz
$R_F$	Feedback resistance	-	-	200	-	kΩ
$I_{DD(HSECLK)}$	HSECLK current consumption	$V_{DD}=3.3V$ , $C_L=10pF@8MHz$	-	-	0.5	mA
$t_{SU(HSECLK)}$	Start-up Time	$V_{DD}$ is stable	-	2	-	ms

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

#### 5.5.1.2 Low-speed external clock generated by crystal resonator

For detailed parameters (frequency, package, precision, etc.) of crystal resonator, please consult the corresponding manufacturer.

Table 26 LSECLK Oscillator Characteristics ( $f_{LSECLK} = 32.768\text{KHz}$ )

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$f_{OSC\_IN}$	Oscillator frequency	-	-	32.768	-	KHz
$I_{DD(LSECLK)}$	LSECLK current consumption	-	-	-	1	$\mu\text{A}$
$t_{SU(LSECLK)}^{(1)}$	Start-up Time	$V_{DD}$ is stable	-	2	-	s

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

(1)  $t_{SU(LSECLK)}$  is the startup time, which is measured from the time when LSECLK is enabled by software to the time when stable oscillation at 32.768KHz is obtained. This value is measured by using a standard crystal resonator, which may vary greatly due to different crystal manufacturers.

## 5.5.2 Characteristics of internal clock source

### 5.5.2.1 High-speed internal (HSICLK) RC oscillator

Table 27 HSICLK Oscillator Characteristics

Symbol	Parameter	Conditions		Minimum value	Typical value	Maximum value	Unit
$f_{HSICLK}$	Frequency	-		-	16	-	MHz
$A_{CC(HSICLK)}$	Accuracy of HSICLK oscillator	Factory calibration	$V_{DD}=3.3\text{V}, T_A=25^\circ\text{C}$	-1	-	1	%
			$V_{DD}=2-3.6\text{V}, T_A=-40\text{--}105^\circ\text{C}$	-2	-	4	%
$I_{DDA(HSICLK)}$	Power consumption of HSICLK oscillator	-		-	100	120	$\mu\text{A}$
$t_{SU(HSICLK)}$	Startup time of HSICLK oscillator	$V_{DD}=3.3\text{V}, T_A=-40\text{--}105^\circ\text{C}$		-	3.7	5	$\mu\text{s}$

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.5.2.2 Low-speed internal (LSICLK) RC oscillator

Table 28 LSICLK Oscillator Characteristics

Symbol	Parameter	Minimum value	Typical value	Maximum value	Unit
$f_{LSICLK}$	Frequency ( $V_{DD}=2-3.6\text{V}, T_A=-40\text{--}105^\circ\text{C}$ )	20	28	35	KHz
$I_{DD(LSICLK)}$	Power consumption of LSICLK oscillator	-	0.4	0.6	$\mu\text{A}$
$t_{SU(LSICLK)}$	Startup time of LSICLK oscillator, ( $V_{DD}=3.3\text{V}, T_A=-40\text{--}105^\circ\text{C}$ )	-	16	40	$\mu\text{s}$

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.5.3 PLL Characteristics

Table 29 PLL1 Characteristics

Symbol	Parameter	Value			Unit
		Minimum value	Typical value	Maximum value	
$f_{PLL1\_IN}$	PLL1 input clock	0.92	1	2.1	MHz
	PLL1 input clock duty cycle	40	-	60	%
$f_{PLL1\_OUT}$	PLL1 frequency multiplier output clock ( $V_{DD}=3.3V$ , $T_A=-40\sim105^\circ C$ )	24	-	168	MHz
$f_{PLL1\_48\_OUT}$	PLL1 frequency multiplier output 48MHz clock ( $V_{DD}=3.3V$ , $T_A=-40\sim105^\circ C$ )	-	48	75	MHz
$t_{LOCK1}$	PLL1 phase locking time	60	-	120	$\mu s$

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

Table 30 PLL2 Characteristics

Symbol	Parameter	Value			Unit
		Minimum value	Typical value	Maximum value	
$f_{PLL2\_IN}$	PLL2 input clock	0.92	1	2.1	MHz
	PLL2 input clock duty cycle	40	-	60	%
$f_{PLL2\_OUT}$	PLL2 frequency multiplier output clock ( $V_{DD}=3.3V$ , $T_A=-40\sim105^\circ C$ )	20	-	144	MHz
$t_{LOCK1}$	PLL phase locking time	82	-	150	$\mu s$

## 5.6 Reset and power management

### 5.6.1 Test of Embedded Reset and Power Control Module Characteristics

Table 31 Embedded Reset and Power Control Module Characteristics

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$V_{POR/PDR}$	Power-on/power-down reset threshold	Falling edge	1.68	1.70	1.70	V
		Rising edge	1.71	1.72	1.73	V
$V_{BOR1}$	Under-voltage threshold level 1	Falling edge	2.19	2.21	2.24	V
		Rising edge	2.27	2.29	2.30	V
$V_{BOR2}$	Under-voltage threshold level 2	Falling edge	2.49	2.51	2.55	V
		Rising edge	2.56	2.58	2.59	V
$V_{BOR3}$	Under-voltage threshold level 3	Falling edge	2.81	2.84	2.87	V
		Rising edge	2.89	2.91	2.92	V
$V_{BORhyst}$	BOR hysteresis	-	-	100	-	mV

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$V_{PDRhyst}$	PDR hysteresis	-	-	40.00	50.00	mV
$T_{RSTTEMPO}$	Reset duration	-	0.70	0.95	1.48	ms

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

Table 32 Programmable Power Supply Voltage Detector Characteristics

Symbol	Parameter	Conditions	Minimum value	Typical value	Maximum value	Unit
$V_{PVD}$	Programmable power supply voltage detector voltage level selection	PLS[2:0]=000 (rising edge)	2.14	-	2.18	V
		PLS[2:0]=000 (falling edge)	2.03	-	2.10	V
		PLS[2:0]=000 (PVD hysteresis)	80.00	-	120.00	mV
		PLS[2:0]=001 (rising edge)	2.30	-	2.34	V
		PLS[2:0]=001 (falling edge)	2.18	-	2.23	V
		PLS[2:0]=001 (PVD hysteresis)	90.00	-	120.00	mV
		PLS[2:0]=010 (rising edge)	2.44	-	2.48	V
		PLS[2:0]=010 (falling edge)	2.32	-	2.37	V
		PLS[2:0]=010 (PVD hysteresis)	110.00	-	120.00	mV
		PLS[2:0]=011 (rising edge)	2.58	-	2.63	V
		PLS[2:0]=011 (falling edge)	2.49	-	2.53	V
		PLS[2:0]=011 (PVD hysteresis)	90.00	-	100.00	mV
		PLS[2:0]=100 (rising edge)	2.75	-	2.80	V
		PLS[2:0]=100 (falling edge)	2.64	-	2.68	V
		PLS[2:0]=100 (PVD hysteresis)	110.00	-	120.00	mV
		PLS[2:0]=101 (rising edge)	2.91	-	2.97	V
		PLS[2:0]=101 (falling edge)	2.81	-	2.86	V
		PLS[2:0]=101 (PVD hysteresis)	100.00	-	110.00	mV
		PLS[2:0]=110 (rising edge)	3.02	-	3.08	V
		PLS[2:0]=110 (falling edge)	2.90	-	2.96	V
		PLS[2:0]=110 (PVD hysteresis)	110.00	-	120.00	mV
		PLS[2:0]=111 (rising edge)	3.12	-	3.19	V
		PLS[2:0]=111 (falling edge)	3.00	-	3.07	V
		PLS[2:0]=111 (PVD hysteresis)	110.00	-	120.00	mV

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

## 5.7 Power consumption

### 5.7.1 Power consumption test environment

- (1) The values are measured by executing Dhrystone 2.1, with the Keil.V5 compilation environment and the L0 compilation optimization level.
- (2) All I/O pins are in analog input mode and are connected to a static level at V<sub>DD</sub> or V<sub>SS</sub> (no load)
- (3) Unless otherwise specified, all peripherals are disabled
- (4) The relationship between Flash wait cycle setting and f<sub>HCLK</sub>:
  - 0~30MHz: 0 wait cycle
  - 30~60MHz: 1 wait cycle
  - 60~90MHz: 2 wait cycles
  - 90~120MHz: 3 wait cycles
  - 120~150MHz: 4 wait cycles
  - 150~168MHz: 5 wait cycles
- (5) When the peripherals are enabled: f<sub>PCLK1</sub>=f<sub>HCLK</sub>/4, f<sub>PCLK2</sub>=f<sub>HCLK</sub>/2

## 5.7.2 Power consumption in run mode

Table 33 Power Consumption in Run Mode when the Program is Executed in Flash (ART is turned on)

Parameter	Conditions	f <sub>HCLK</sub>	Typical value <sup>(1)</sup>		Maximum value <sup>(1)</sup>	
			T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		T <sub>A</sub> =105°C, V <sub>DD</sub> =3.6V	
			I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)
Power consumption in run mode	HSECLK bypass <sup>(2)</sup> , enabling all peripherals <sup>(3)</sup>	168MHz	751.56	67.70	802.20	74.02
		144MHz	693.94	52.75	745.20	57.66
		120MHz	637.4	44.49	691.10	49.39
		90MHz	780.88	34.37	831.70	39.375
		60MHz	636.86	23.86	689.60	28.7
		30MHz	636.62	13.29	689.40	18.099
		25MHz	115.372	10.83	127.76	15.627
		16MHz	115.42	7.21	127.93	11.905
		8MHz	115.36	3.93	127.77	8.587
		4MHz	115.33	2.31	127.78	6.967
		2MHz	115.36	1.49	127.82	6.17
Power consumption in run mode	HSECLK bypass <sup>(2)</sup> , disabling all peripherals	168MHz	750.88	28.35	801.40	34.352
		144MHz	692.84	22.02	744.70	26.958
		120MHz	636.82	18.54	691.10	23.48
		90MHz	779.80	14.45	831.90	19.302
		60MHz	636.52	10.04	689.80	14.924
		30MHz	636.40	5.75	690.20	10.563
		25MHz	115.32	4.38	128.66	9.115
		16MHz	115.34	3.01	128.44	7.673
		8MHz	115.36	1.86	127.80	6.481
		4MHz	115.35	1.27	127.84	5.93
		2MHz	115.36	0.99	127.86	5.65

Note:

(1) The data are obtained from a comprehensive evaluation and are not tested in production.

(2) The external clock is 4MHz; when f<sub>HCLK</sub>>25MHz, turn on PLL; otherwise, turn off PLL.

(3) When the analog peripherals such as ADC, DAC, HSECLK, LSECLK, HSICLK and LSICLK are turned on, extra power consideration needs to be considered.

Table 34 Power Consumption in Run Mode when the Program is Executed in Flash (ART is turned off)

Parameter	Conditions	f <sub>HCLK</sub>	Typical value <sup>(1)</sup>		Maximum value <sup>(1)</sup>	
			T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		T <sub>A</sub> =105°C, V <sub>DD</sub> =3.6V	
			I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)
Power consumption in run mode	HSECLK bypass <sup>(2)</sup> , enabling all peripherals <sup>(3)</sup>	168MHz	751.66	64.25	802.00	70.52
		144MHz	693.58	51.09	745.30	56.05
		120MHz	637.26	43.99	690.20	48.92
		90MHz	780.86	34.91	831.40	39.97
		60MHz	636.78	25.02	689.40	29.90
		30MHz	636.66	14.33	689.00	19.32
		25MHz	115.36	11.80	127.72	16.725
		16MHz	115.36	7.83	127.75	12.53
		8MHz	115.35	4.27	127.80	8.99
		4MHz	115.35	2.45	127.88	7.13
		2MHz	115.362	1.57	127.76	6.28
	HSECLK bypass <sup>(2)</sup> , disabling all peripherals	168MHz	750.94	24.71	801.40	30.85
		144MHz	692.82	20.21	744.70	25.18
		120MHz	636.76	17.96	689.80	22.91
		90MHz	780.46	15.03	831.60	20.01
		60MHz	636.46	11.19	689.80	16.13
		30MHz	636.38	6.79	689.90	11.68
		25MHz	115.33	5.26	128.50	10.15
		16MHz	115.32	3.65	127.96	8.46
		8MHz	115.36	2.14	127.82	6.80
		4MHz	115.35	1.43	127.68	6.11
		2MHz	115.53	1.07	127.90	5.82

Note:

(1) The data are obtained from a comprehensive evaluation and are not tested in production.

(2) The external clock is 4MHz; when f<sub>HCLK</sub>>25MHz, turn on PLL; otherwise, turn off PLL.

(3) When the analog peripherals such as ADC, DAC, HSECLK, LSECLK, HSICLK and LSICLK are turned on, extra power consideration needs to be considered.

Table 35 Power Consumption in Run Mode when the Program is Executed in RAM

Parameter	Conditions	f <sub>HCLK</sub>	Typical value <sup>(1)</sup>		Maximum value <sup>(1)</sup>	
			T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		T <sub>A</sub> =105°C, V <sub>DD</sub> =3.6V	
			I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)
Power consumption in run mode	HSECLK bypass <sup>(2)</sup> , enabling all peripherals <sup>(3)</sup>	168MHz	752.14	70.29	803.80	76.51
		144MHz	693.74	54.73	745.50	59.73
		120MHz	637.60	46.22	690.40	51.16
		90MHz	781.00	35.67	832.00	40.53
		60MHz	637.02	24.70	689.8	29.65
		30MHz	636.74	13.74	689.2	18.596
		25MHz	115.42	11.23	127.85	16.02
		16MHz	115.374	7.42	127.88	12.21
		8MHz	115.37	4.05	127.81	8.836
		4MHz	115.376	2.38	127.72	7.12
		2MHz	115.347	1.53	127.76	6.28
	HSECLK bypass <sup>(2)</sup> , disabling all peripherals	168MHz	751.38	31.03	802.4	37.29
		144MHz	693.00	24.11	744.7	29.11
		120MHz	636.88	20.30	689.80	25.23
		90MHz	780.56	15.81	931.60	20.74
		60MHz	636.68	10.92	690.00	15.80
		30MHz	636.62	6.19	689.70	11.02
		25MHz	115.36	4.75	128.42	9.48
		16MHz	115.35	3.26	128.79	8.07
		8MHz	115.38	1.97	127.76	6.71
		4MHz	115.36	1.33	127.73	6.04
		2MHz	115.34	1.02	127.74	5.70

Note:

(1) The data are obtained from a comprehensive evaluation and are not tested in production.

(2) The external clock is 4MHz, and when f<sub>HCLK</sub>>25MHz, turn on PLL, otherwise, turn off PLL.

(3) When the analog peripherals such as ADC, DAC, HSECLK, LSECLK, HSICLK and LSICLK are turned on, extra power consideration needs to be considered.

### 5.7.3 Power consumption in sleep mode

Table 36 Power Consumption in Sleep Mode when the Program is Executed in Flash (ART is turned off)

Parameter	Conditions	f <sub>HCLK</sub>	Typical value <sup>(1)</sup>		Maximum value <sup>(1)</sup>	
			T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		T <sub>A</sub> =105°C, V <sub>DD</sub> =3.6V	
			I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (mA)
Power consumption in sleep mode	HSECLK bypass <sup>(2)</sup> , enabling all peripherals	168MHz	751.34	54.18	802.1	60.33
		144MHz	693.26	42.25	745.00	47.12
		120MHz	637.24	35.75	689.80	40.53
		90MHz	780.60	27.69	831.20	32.539
		60MHz	636.72	19.33	689.20	24.149
		30MHz	636.46	11.02	689.20	15.8
		25MHz	115.356	8.96	127.77	13.7
		16MHz	115.34	5.99	127.71	10.68
		8MHz	115.334	3.33	127.78	8.01
		4MHz	115.332	2.00	127.84	6.669
		2MHz	115.352	1.34	127.82	6.017
Power consumption in sleep mode	HSECLK bypass <sup>(2)</sup> , disabling all peripherals	168MHz	750.52	13.91	801.00	19.86
		144MHz	692.58	10.82	743.90	15.64
		120MHz	636.46	9.20	689.00	13.99
		90MHz	780.24	7.44	830.60	12.21
		60MHz	636.42	5.33	689.00	10.07
		30MHz	636.36	3.38	688.80	8.10
		25MHz	115.37	2.41	127.84	7.08
		16MHz	115.35	1.79	127.74	6.46
		8MHz	115.35	1.23	127.83	5.91
		4MHz	115.36	0.96	127.86	5.63
		2MHz	115.42	0.83	127.84	5.54

Note:

(1) The data are obtained from a comprehensive evaluation and are not tested in production.

(2) The external clock is 4MHz; when f<sub>HCLK</sub>>25MHz, turn on PLL; otherwise, turn off PLL.

### 5.7.4 Power consumption in stop mode

Table 37 Power Consumption in Stop Mode

Conditions		Typical value <sup>(1)</sup> , ( $T_A=25^\circ\text{C}$ )						Maximum value <sup>(1)</sup> , ( $V_{DD}=3.6\text{V}$ )	
		$V_{DD}=2.4\text{V}$		$V_{DD}=3.3\text{V}$		$V_{DD}=3.6\text{V}$		$T_A=105^\circ\text{C}$	
		$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ (mA)	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ (mA)	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ (mA)	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ (mA)
The regulator is in run mode, and all oscillators are in off state	Flash is in stop mode, and RC internal oscillator and high-speed oscillator are turned off (with no independent watchdog)	9.28	0.69	9.80	0.70	10.05	0.71	12.36	20.00
	Flash is in power-down mode, and RC internal oscillator and high-speed oscillator are turned off (with no independent watchdog)	9.23	0.69	9.72	0.70	10.00	0.70	12.35	20.00
The regulator is in low-power mode, and all oscillators are in off state	Flash is in stop mode, and RC internal oscillator and high-speed oscillator are turned off (with no independent watchdog)	4.18	0.21	4.65	0.21	4.87	0.21	5.91	15.00
	Flash is in power-down mode, and RC internal oscillator and high-speed oscillator are turned off (with no independent watchdog)	4.19	0.20	4.64	0.20	4.86	0.20	5.86	15.00

Note: It is tested in comprehensive evaluation instead of in production.

### 5.7.5 Power consumption in standby mode

Table 38 Power Consumption in Standby Mode

Conditions		Typical value <sup>(1)</sup> , ( $T_A=25^\circ\text{C}$ )						Maximum value <sup>(1)</sup> , ( $V_{DD}=3.6\text{V}$ )	
		$V_{DD}=2.4\text{V}$		$V_{DD}=3.3\text{V}$		$V_{DD}=3.6\text{V}$		$T_A=105^\circ\text{C}$	
		$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ ( $\mu\text{A}$ )	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ ( $\mu\text{A}$ )	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ ( $\mu\text{A}$ )	$I_{DDA}$ ( $\mu\text{A}$ )	$I_{DD}$ ( $\mu\text{A}$ )
Power supply current in standby mode	The backup SRAM is turned on, and the low-speed oscillator and RTC are turned on	2.15	8.38	2.56	9.73	2.83	10.19	3.76	59.39
	The backup SRAM is turned off, and the low-speed oscillator and RTC are turned on	2.15	3.52	2.62	4.46	2.81	5.11	3.48	32.00

Conditions	Typical value <sup>(1)</sup> , (T <sub>A</sub> =25°C)						Maximum value <sup>(1)</sup> , (V <sub>DD</sub> =3.6V)	
	V <sub>DD</sub> =2.4V		V <sub>DD</sub> =3.3V		V <sub>DD</sub> =3.6V		T <sub>A</sub> =105°C	
	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (μA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (μA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (μA)	I <sub>DDA</sub> (μA)	I <sub>DD</sub> (μA)
The backup SRAM is turned on, and the RTC is turned off	2.13	7.33	2.62	8.24	2.81	8.64	3.45	58.24
The backup SRAM is turned off, and the RTC is turned off	2.13	2.51	2.61	3.31	2.78	3.68	3.45	19.20

Note: (1) The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.7.6 Peripheral power consumption

Peripheral power consumption = current that enables the peripheral clock-current that disables the peripheral clock.

Table 39 Peripheral Power Consumption

Parameter	Peripheral	Typical value <sup>(1)</sup> T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		Unit
		168MHz	144MHz	
AHB1 (up to 168MHz)	DMA1	5.4	4.21	μA/MHz
	DMA2	5.56	4.3	
	ETH	3	2.35	
	OTG_HS	4.21	3.26	
	GPIOA	0.32	0.25	
	GPIOB	0.31	0.24	
	GPIOC	0.32	0.24	
	GPIOD	0.3	0.23	
	GPIOE	0.31	0.25	
	GPIOF	0.33	0.26	
	GPIOG	0.3	0.24	
AHB2 (up to 168MHz)	CRC	0.03	0.03	
	BAKPR	0.07	0.05	
	OTG_FS	3.12	2.41	
	DCI	0.79	0.61	
	RNG	0.16	0.12	
AHB3 (up to 168MHz)	HASH	1.3	1	
	CRYP	0.25	0.19	
AHB3 (up to 168MHz)	EMMC	1.68	1.3	

Parameter	Peripheral	Typical value <sup>(1)</sup> T <sub>A</sub> =25°C, V <sub>DD</sub> =3.3V		Unit
		168MHz	144MHz	
APB1 (up to 42MHz)	TMR2	0.46	0.36	
	TMR3	0.35	0.27	
	TMR4	0.34	0.27	
	TMR5	0.46	0.35	
	TMR6	0.08	0.07	
	TMR7	0.08	0.06	
	TMR12	0.19	0.15	
	TMR13	0.14	0.11	
	TMR14	0.14	0.1	
	WWDT	0.02	0.02	
	SPI2/I2S2	0.12	0.1	
	SPI3/I2S3	0.12	0.1	
	USART2	0.11	0.09	
	USART3	0.12	0.09	
	UART4	0.11	0.08	
	UART5	0.11	0.08	
	I2C1	0.12	0.09	
	I2C2	0.12	0.09	
	I2C3	0.12	0.1	
APB2 (up to 84MHz)	CAN1	0.18	0.14	
	CAN2	0.16	0.13	
	PMU	0.01	0.01	
	DAC	0.08	0.06	
	SDIO	0.41	0.32	
	TMR1	0.99	0.77	
	TMR8	0.97	0.77	
	TMR9	0.41	0.32	
	TMR10	0.27	0.21	

Parameter	Peripheral	Typical value <sup>(1)</sup> TA=25°C, V <sub>DD</sub> =3.3V		Unit
		168MHz	144MHz	
	SPI1	0.12	0.11	
	USART1	0.22	0.18	
	USART6	0.21	0.18	
	SYSCFG	0.05	0.05	

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.7.7 Backup Domain Power Consumption

Table 40 V<sub>BAT</sub> Power Consumption

Symbol	Parameter	Conditions	Typical value <sup>(1)</sup> , TA=25°C		Maximum value <sup>(1)</sup> , V <sub>BAT</sub> =3.6V		Unit
			V <sub>BAT</sub> =2.4V	V <sub>BAT</sub> =3.3V	TA=85°C	TA=105°C	
I <sub>DD_VBAT</sub>	LSECLK and RTC are in ON state	The backup SRAM is turned on, and the low-speed oscillator and RTC are turned on	1.894	2.262	6	11	μA
		The backup SRAM is turned off, and the low-speed oscillator and RTC are turned on	1.08	1.412	3	5	
		The backup SRAM is turned on, and the RTC is turned off	0.926	1.116	5	10	
		The backup SRAM is turned off, and the RTC is turned off	0.02	0.128	2	4	

Note: (1) The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.8 Wake-up time in low-power mode

The measurement of wake-up time in low-power mode is from the start of wake-up event to the time when the user program reads the first instruction, in which V<sub>DD</sub>=V<sub>DDA</sub>.

Table 41 Wake-up Time in Low-power Mode

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t <sub>WUSLEEP</sub>	Wake-up from sleep mode	-	39.00	59	61.20	ns
t <sub>WUSTOP</sub>	Wake up from the stop mode	The regulator is in run mode, and Flash is in stop state	12.51	13.602	14.99	μs
		The regulator is in low-power mode, and Flash is in stop state	15.51	19.552	22.93	

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
		The regulator is in run mode, and Flash is in deep power-down mode	125.63	133.156	135.16	
		The regulator is in low-power mode, and Flash is in deep power-down mode	133.52	136.956	139.60	
tWUSTDBY	Wake up from standby mode	-	173.03	214.056	227.96	

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

## 5.9 I/O port characteristics

Table 42 DC Characteristics ( $T_A=-40^{\circ}\text{C}$ - $105^{\circ}\text{C}$ ,  $V_{DD}=2\text{~}3.6\text{V}$ )

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V <sub>IL</sub>	Low-level input voltage	STD and STDA I/O	-	-	0.3V <sub>DD</sub> -0.04	V
		5T and 5Tf I/O	-	-	0.3V <sub>DD</sub>	
		Boot0 pin	-	-	0.1V <sub>DD</sub> +0.1	
V <sub>IH</sub>	High-level input voltage	STD and STDA I/O	0.45V <sub>DD</sub> +0.3	-	-	V
		5T and 5Tf I/O	0.7V <sub>DD</sub>	-	-	
		Boot0 pin	0.17V <sub>DD</sub> +0.7	-	-	
V <sub>hys</sub>	Schmidt trigger hysteresis	STD, STDA and 5T, 5Tf I/O	10% V <sub>DD</sub>	-	-	mV
		Boot0 pin	0.1	-	-	
I <sub>lk</sub>	Input leakage current	STDA in digital mode, $V_{DDIOx} \leq V_{IN} \leq V_{DDA}$	-	-	$\pm 1$	$\mu\text{A}$
		5T and 5Tf I/O, $V_{DDIOx} \leq V_{IN} \leq 5\text{V}$	-	-	3	
R <sub>PU</sub>	Weak pull-up equivalent resistance	Except PA10 and PB12, $V_{IN}=V_{SS}$	30	40	50	$\text{k}\Omega$
		PA10 and PB12	7	10	14	
R <sub>PD</sub>	Weak pull-down equivalent resistance	Except PA10 and PB12, $V_{IN}=V_{DD}$	30	40	50	
		PA10 and PB12	7	10	14	
C <sub>io</sub>	I/O pin capacitance	-	-	5	-	pF

Table 43 AC Characteristics ( $T_A=25^{\circ}\text{C}$ )

SPEED[1:0]	Symbol	Parameter	Conditions	Min	Max	Unit
00	f <sub>max(I/O)out</sub>	Maximum frequency	CL=50pF, $V_{DD}>2.7\text{V}$	-	4	MHz
			CL=50pF, $V_{DD}>1.8\text{V}$	-	2	
			CL=10pF, $V_{DD}>2.7\text{V}$	-	8	

SPEED[1:0]	Symbol	Parameter	Conditions	Min	Max	Unit
01	$t_{f(IO)out}/t_{r(IO)out}$	Fall time of output from high to low level and rise time of output from low to high level	CL=10pF, $V_{DD} > 1.8V$	-	4	
			CL=50 pF, $V_{DD} = 1.8 V - 3.6V$	-	100	ns
01	$f_{max(IO)out}$	Maximum frequency	CL=50pF, $V_{DD} > 2.7V$	-	25	MHz
			CL=50pF, $V_{DD} > 1.8V$	-	12.5	
			CL=10pF, $V_{DD} > 2.7V$	-	50	
			CL=10pF, $V_{DD} > 1.8V$	-	20	
	$t_{f(IO)out}/t_{r(IO)out}$	Fall time of output from high to low level and rise time of output from low to high level	CL=30pF, $V_{DD} > 2.7V$	-	10	ns
			CL=30pF, $V_{DD} > 1.8V$	-	20	
			CL=10pF, $V_{DD} > 2.7V$	-	6	
			CL=10pF, $V_{DD} > 1.8V$	-	10	
10	$f_{max(IO)out}$	Maximum frequency	CL=30pF, $V_{DD} > 2.7V$	-	50	MHz
			CL=30pF, $V_{DD} > 1.8V$	-	25	
			CL=10pF, $V_{DD} > 2.7V$	-	100	
			CL=10pF, $V_{DD} > 1.8V$	-	50	
	$t_{f(IO)out}/t_{r(IO)out}$	Fall time of output from high to low level and rise time of output from low to high level	CL=30pF, $V_{DD} > 2.7V$	-	6	ns
			CL=30pF, $V_{DD} > 1.8V$	-	10	
			CL=10pF, $V_{DD} > 2.7V$	-	4	
			CL=10pF, $V_{DD} > 1.8V$	-	6	
11	$f_{max(IO)out}$	Maximum frequency	CL=30pF, $V_{DD} > 2.7V$	-	100	MHz
			CL=30pF, $V_{DD} > 1.8V$	-	50	
			CL=10pF, $V_{DD} > 2.7V$	-	180	
			CL=10pF, $V_{DD} > 1.8V$	-	100	
	$t_{f(IO)out}/t_{r(IO)out}$	Fall time of output from high to low level and rise time of output from low to high level	CL=30pF, $V_{DD} > 2.7V$	-	4	ns
			CL=30pF, $V_{DD} > 1.8V$	-	6	
			CL=10pF, $V_{DD} > 2.7V$	-	2.5	
			CL=10pF, $V_{DD} > 1.8V$	-	4	
-	$t_{EINTipw}$	Pulse width of external signal detected by EINT controller	-	10	-	

Figure 10 I/O AC Characteristics Definition

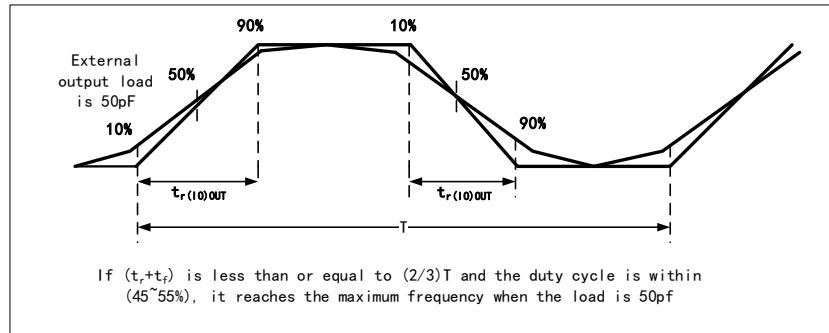


Table 44 Output Drive Voltage Characteristics ( $T_A=25^\circ\text{C}$ )

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{OL}$	I/O pin outputs low voltage	CMOS port, $ I_{IO} =8\text{mA}$ , $2.7\text{ V} < V_{DD} < 3.6\text{ V}$	-	0.4	V
$V_{OH}$	I/O pin outputs high voltage		$V_{DD}-0.4$	-	
$V_{OL}$	I/O pin outputs low voltage	TTL port, $ I_{IO} =20\text{mA}$ , $2.7\text{ V} < V_{DD} < 3.6\text{ V}$	-	0.4	V
$V_{OH}$	I/O pin outputs high voltage		2.4	-	
$V_{OL}$	I/O pin outputs low voltage	$ I_{IO} =20\text{mA}$ , $2.7\text{ V} < V_{DD} < 3.6\text{ V}$	-	1.3	V
$V_{OH}$	I/O pin outputs high voltage		$V_{DD}-1.3$	-	
$V_{OL}$	I/O pin outputs low voltage	$ I_{IO} =6\text{mA}$ , $2.7\text{ V} < V_{DD} < 3.6\text{ V}$	-	0.4	V
$V_{OH}$	I/O pin outputs high voltage		$V_{DD}-0.4$	-	

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

## 5.10 NRST pin characteristics

The NRST pin input drive adopts CMOS process, which is connected with a permanent pull-up resistor RPU.

Table 45 NRST Pin Characteristics ( $T_A=-40\text{~}105^\circ\text{C}$ ,  $V_{DD}=2\text{~}3.6\text{V}$ )

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IL(NRST)}$	NRST low-level input voltage	TTL port, $2.7\text{V}\leq V_{DD}\leq 3.6\text{V}$	-	-	0.8	V
$V_{IH(NRST)}$	NRST high-level input voltage		2	-	-	
$V_{IL(NRST)}$	NRST low-level input voltage	CMOS port, $1.8\text{V}\leq V_{DD}\leq 3.6\text{V}$	-	-	$0.3V_{DD}$	V
$V_{IH(NRST)}$	NRST high-level input voltage		$0.7V_{DD}$	-	-	
$V_{hys(NRST)}$	NRST Schmidt trigger voltage hysteresis	-	-	200	-	mV
$R_{PU}$	Weak pull-up equivalent resistance	$V_{IN}=V_{SS}$	30	40	50	k $\Omega$
$V_F(NRST)$	NRST input filter pulse	-	-	-	100	ns
$V_{NF(NRST)}$	NRST input unfiltered pulse	$V_{DD}>2.7\text{V}$	300	-	-	

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_NRST_OUT	Generated reset pulse duration	Reset internal source	20	-	-	μs

## 5.11 Communication peripherals

### 5.11.1 I2C peripheral characteristics


To achieve maximum frequency of I2C in standard mode,  $f_{PCLK1}$  must be greater than 2MHz. To achieve maximum frequency of I2C in fast mode,  $f_{PCLK1}$  must be greater than 4MHz.

Table 46 I2C Interface Characteristics ( $T_A=25^\circ\text{C}$ ,  $V_{DD}=3.3\text{V}$ )

Symbol	Parameter	Standard I2C		Fast I2C		Unit
		Min	Max	Min	Max	
$t_{W(SCL)}$	SCL clock low time	4.7	-	1.3	-	μs
$t_{W(SCLH)}$	SCL clock high time	4.0	-	0.6	-	
$t_{SU}(SDA)$	SDA setup time	250	-	100	-	ns
$t_{H}(SDA)$	SDA data hold time	0	-	0	900	
$t_{R(SDA)}/t_{R(SCL)}$	SDA and SCL rise time	-	1000	$20+0.1C_b$	300	
$t_{F(SDA)}/t_{F(SCL)}$	SDA and SCL fall time	-	300	-	300	
$t_{H(STA)}$	Start condition hold time	4.0	-	0.6	-	
$t_{SU(STA)}$	Setup time of repeated start condition	4.7	-	0.6	-	μs
$t_{SU(STO)}$	Setup time of stop condition	4.0	-	0.6	-	
$t_{W(STO:STA)}$	Time from stop condition to start condition (the bus is idle)	4.7	-	1.3	-	
$C_b$	Capacitive load of each bus	-	400	-	400	pF

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

Figure 11 Bus AC Waveform and Measurement Circuit

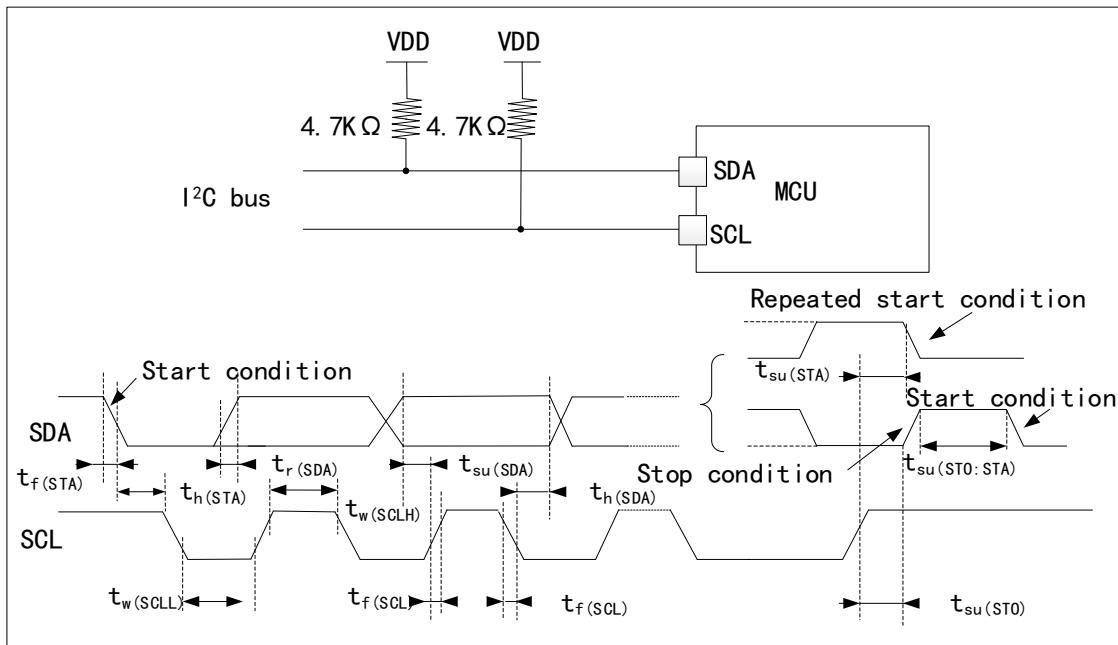

Note: The measuring points are set at CMOS levels:  $0.3V_{DD}$  and  $0.7V_{DD}$ .

### 5.11.2 SPI peripheral characteristics

Table 47 SPI Characteristics ( $T_A=25^\circ C$ ,  $V_{DD}=3.3V$ )

Symbol	Parameter	Conditions	Min	Max	Unit
f <sub>SCK</sub>	SPI clock frequency	Master mode, SPI1, $2.7V < V_{DD} < 3.6V$	-	42	MHz
		Slave mode, SPI1, $2.7V < V_{DD} < 3.6V$	-	42	
		Master mode, SPI1/2/3, $1.7V < V_{DD} < 3.6V$	-	21	
		Slave mode, SPI1/2/3, $1.7V < V_{DD} < 3.6V$	-	21	
t <sub>r(SCK)</sub> t <sub>f(SCK)</sub>	SI clock rise and fall time	Load capacitance: C=15pF	-	6	ns
t <sub>su(NSS)</sub>	NSS setup time	Slave mode	$4T_{PCLK}$	-	
t <sub>h(NSS)</sub>	NSS hold time	Slave mode	$2T_{PCLK} + 10$	-	
t <sub>w(SCKH)</sub> t <sub>w(SCKL)</sub>	SCK high and low time	Master mode, $f_{PCLK}=36MHz$ , Prescaler factor=4	$T_{PCLK}/2-2$	$T_{PCLK}/2+1$	
t <sub>su(MI)</sub> t <sub>su(SI)</sub>	Data input setup time	Master mode	4	-	
		Slave mode	5	-	
t <sub>h(MI)</sub> t <sub>h(SI)</sub>	Data input hold time	Master mode	4	-	
		Slave mode	5	-	

Symbol	Parameter	Conditions	Min	Max	Unit
$t_a(SO)$	Data output access time	Slave mode, $f_{PCLK}=20MHz$	0	$3T_{PCLK}$	
$t_{dis(SO)}$	Disable time of data output	Slave mode	0	18	
$t_v(SO)$	Effective time of data output	Slave mode (after enabling the edge)	-	22.5	
$t_v(MO)$	Effective time of data output	Master mode (after enabling the edge)	-	6.97	
$t_h(SO)$	Data output hold time	Slave mode (after enabling the edge)	11.5	-	
$t_h(MO)$		Master mode (after enabling the edge)	1	-	
DuCy(SCK)	SPI clock frequency duty cycle	Slave mode	25	75	%

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

Figure 12 SPI Timing Diagram - Slave Mode and CPHA=0



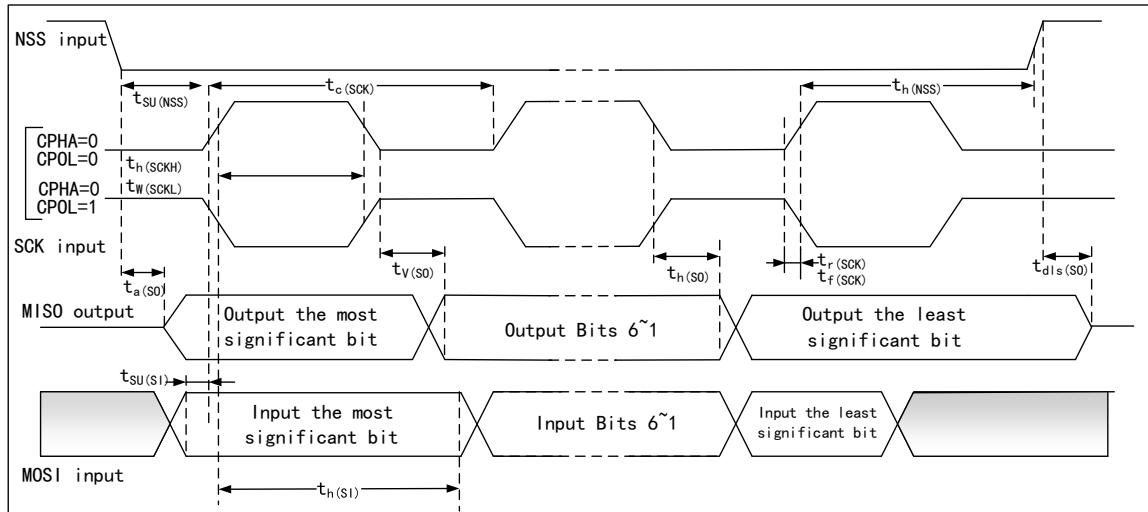


Figure 13 SPI Timing Diagram - Slave Mode and CPHA=1

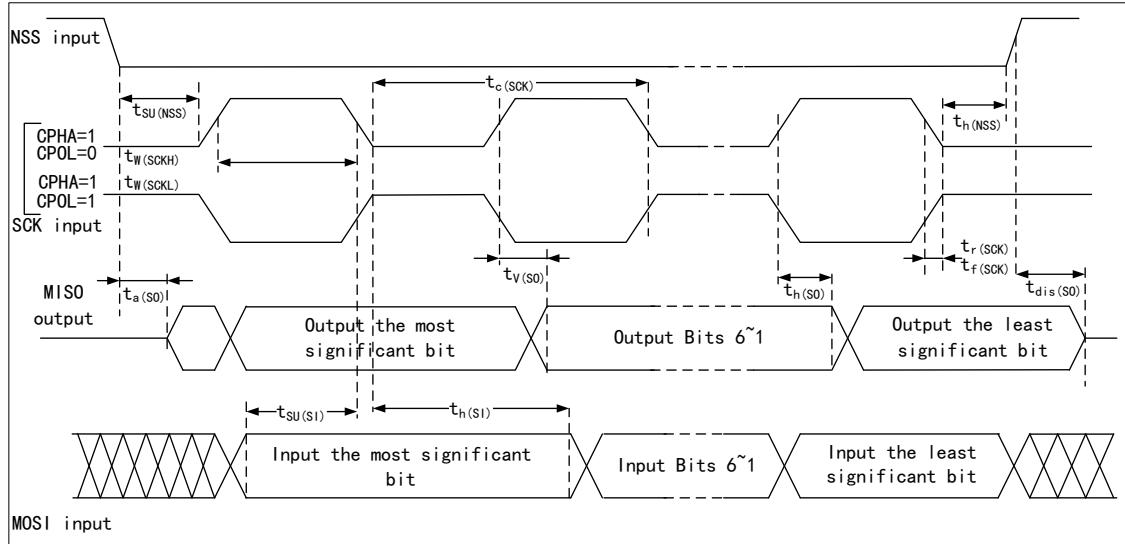

Note: The measuring points are set at CMOS levels: 0.3V<sub>DD</sub> and 0.7V<sub>DD</sub>.

Figure 14 SPI Timing Diagram - Master Mode

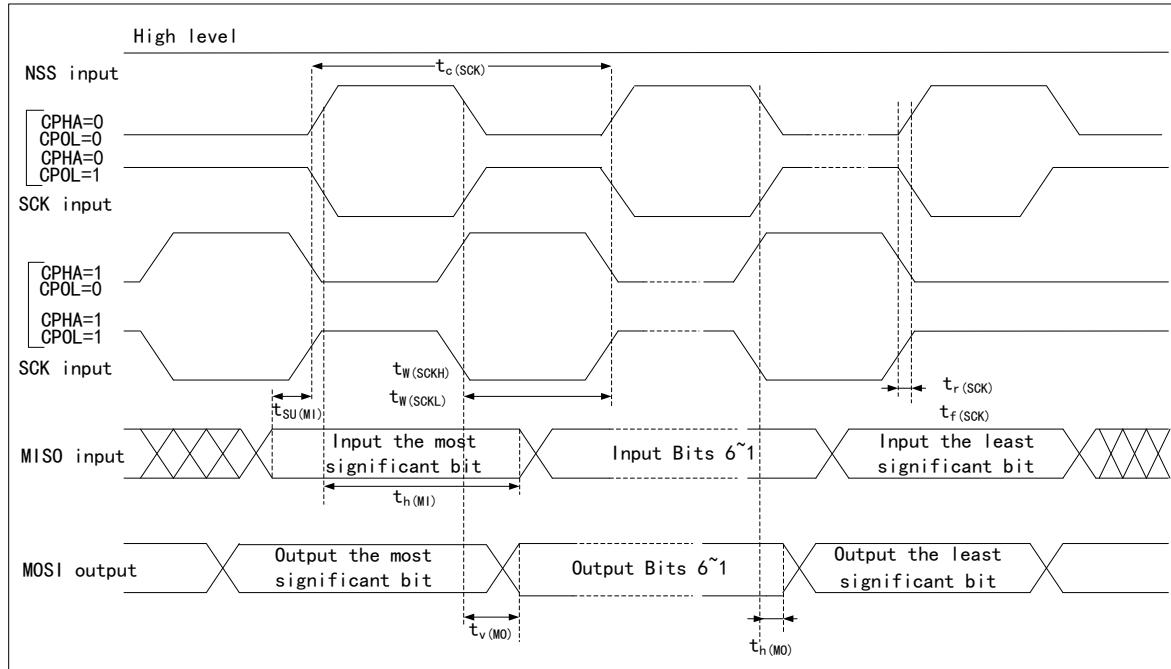

Note: The measuring points are set at CMOS levels: 0.3V<sub>DD</sub> and 0.7V<sub>DD</sub>.

## 5.12 Analog peripherals

### 5.12.1 ADC

Test parameter description:

- Sampling rate: the number of conversion of analog quantity to digital quantity by ADC per second
- Sample rate=ADC clock/(number of sampling periods + number of conversion periods)

### 5.12.1.1 12-bit ADC characteristics

Table 48 12-bit ADC Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{DDA}$	Power supply voltage	-	1.8	-	3.6	V
$I_{DDA}$	ADC power consumption	-	-	1.6	1.8	mA
$f_{ADC}$	ADC frequency	$V_{DDA}=1.8\sim2.4V$	0.6	15	18	MHz
		$V_{DDA}=2.4\sim3.6V$	0.6	30	36	
$C_{ADC}$	Internal sampling and holding capacitance	-	-	4	-	pF
$R_{ADC}$	Sampling resistor	-	-	-	6000	$\Omega$
$t_s$	Sampling time	$f_{ADC}=30MHz$	0.1		16	$\mu s$
		-	3		480	$1/f_{ADC}$
$T_{CONV}$	Sampling and conversion time	$f_{ADC}=30MHz$ 12-bit resolution	0.50	-	16.40	$\mu s$
		$f_{ADC}=30MHz$ 10-bit resolution	0.43	-	16.34	$\mu s$
		$f_{ADC}=30MHz$ 8-bit resolution	0.37	-	16.27	$\mu s$
		$f_{ADC}=30MHz$ 6-bit resolution	0.30	-	16.20	$\mu s$

Table 49 12-bit ADC Accuracy

Symbol	Parameter	Conditions	Typ	Max	Unit
$E_T$	Composite error	$f_{PCLK}=56MHz$ , $f_{ADC}=14MHz$ , $V_{DDA}=2.4V\sim3.6V$ , $T_A=-40^\circ C \sim 105^\circ C$	$\pm 2$	$\pm 5$	LSB
$E_o$	Offset error		$\pm 1.5$	$\pm 2.5$	
$E_g$	Gain error		$\pm 1.5$	$\pm 3$	
$E_d$	Differential linear error		$\pm 1$	$\pm 2$	
$E_l$	Integral linear error		$\pm 1.5$	$\pm 3$	

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.12.1.2 Test of Built-in Reference Voltage Characteristics

Table 50 Built-in Reference Voltage Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{REFINT}$	Built-in Reference Voltage	-40°C < $T_A$ < +105°C	1.19	1.20	1.20	V
$T_{S\_vrefint}$	Sampling time of ADC when reading out internal reference voltage	-	10	-	-	μs
$V_{RERINT}$	Built-in reference voltage extends to temperature range	$V_{DD}=3V$	-	3	5	mV
$T_{coeff}$	Temperature coefficient	-	-	30	50	ppm/°C

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

### 5.12.2 DAC

Test parameter description:

- DNL differential non-linear error: the deviation between two consecutive codes minus 1LSB
- INL integral non-linear error: the difference between the measured value at code i and the value at code i on the connection between code 0 and the last code 4095

Table 51 DAC Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{DDA}$	Analog power supply voltage	-	1.8	-	3.6	V
$R_{LOAD}$	Resistive load	The buffer is turned on	5	-	-	kΩ
$R_o$	Output impedance	The resistive load between DAC_OUT and Vss is 1.5MΩ with buffer off	-	-	15	kΩ
$C_{LOAD}$	Capacitive load	Maximum capacitive load at DAC_OUT pin with buffer on	-	-	50	pF
DAC_OUT min	Low DAC_OUT voltage with buffer	Maximum output offset of DAC, (0x0E0) corresponding to 12-bit input code to $V_{REF+}= (0xF1C)$ at 3.6V and $V_{REF+}= (0x1C7)$ at 1.8V and (0xE38)	0.2	-	-	V
DAC_OUT max	Higher DAC_OUT voltage with buffer		-	-	$V_{DDA}-0.2$	V
DAC_OUT min	Low DAC_OUT voltage without buffer	Maximum output offset of DAC	-	0.5	-	mV
DAC_OUT max	Higher DAC_OUT voltage without buffer		-	-	$V_{REF+}-1LSB$	V
DNL	Differential non-linear error	Configured with 12-bit DAC	-	-	$\pm 2$	LSB
INL	Integral non-linear error	Configured with 12-bit DAC	-	-	$\pm 4$	LSB
Offset	Offset error	$V_{REF+}=3.6V$ , configuring 12-bit DAC	-	-	$\pm 12$	LSB



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Gain error	Gain error	Configured with 12-bit DAC	-	-	$\pm 0.5$	%

Note: The data are obtained from a comprehensive evaluation and are not tested in production.

## 6 Package Information

### 6.1 LQFP144 package information

Figure 15 LQFP144 Package Diagram

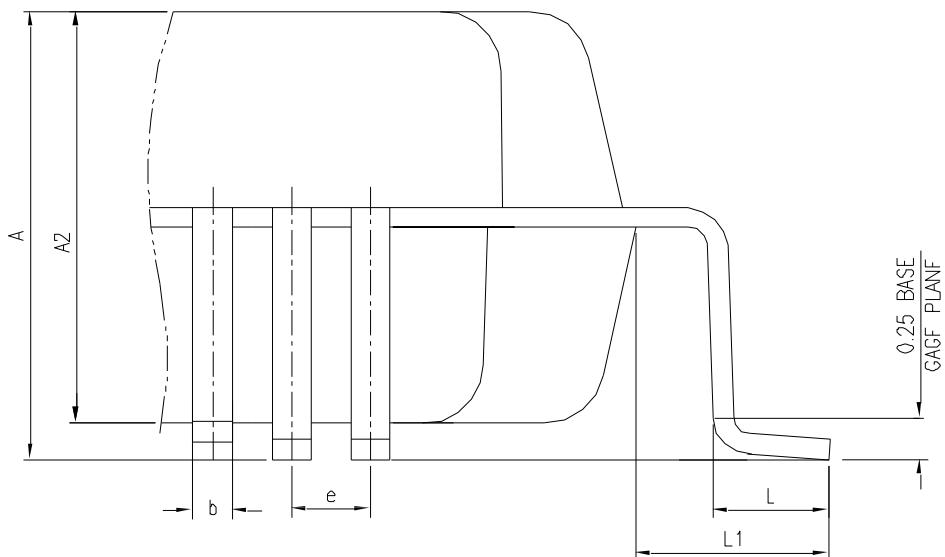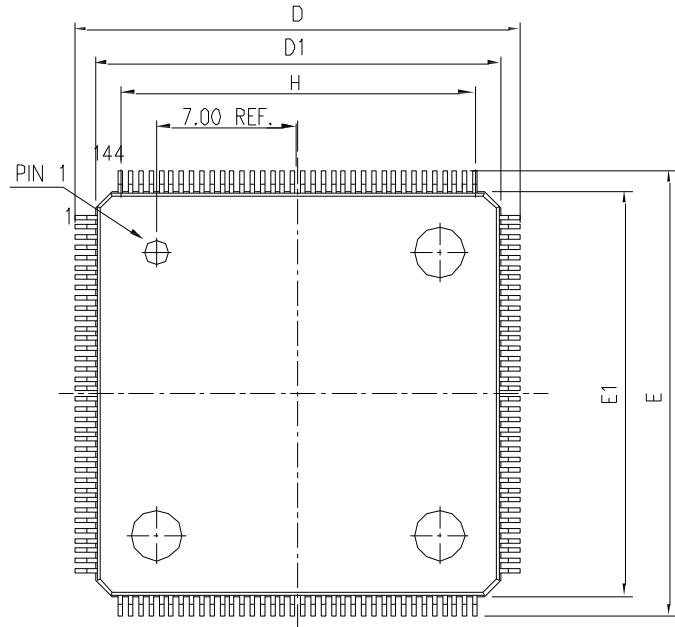

- (1) The figure is not drawn to scale.
- (2) All pins should be soldered to the PCB.


Table 52 LQFP144 Package Data

S/N	SYM	DIMENSIONS	REMARKS
1	A	MAX. 1.600	OVERALL HEIGHT
2	A2	1.400±0.050	PKG THICKNESS
3	D	22.000±0.200	LEAD TIP TO TIP

S/N	SYM	DIMENSIONS	REMARKS
4	D1	20.000±0.100	PKG LENGTH
5	E	22.000±0.200	LEAD TIP TO TIP
6	E1	20.000±0.100	PKG WDTH
7	L	0.600±0.150	FOOT LENGTH
8	L1	1.000 REF	LEAD LENGTH
9	e	0.500 BASE	LEAD PITCH
10	H (REF)	(17.50)	CUM LEAD PITCH
11	b	0.22±0.050	LEAD WIDTH

Note: Dimensions are marked in millimeters.

Figure 16 LQFP144-144 Pins, 20 x 20mm Welding Layout Recommendations

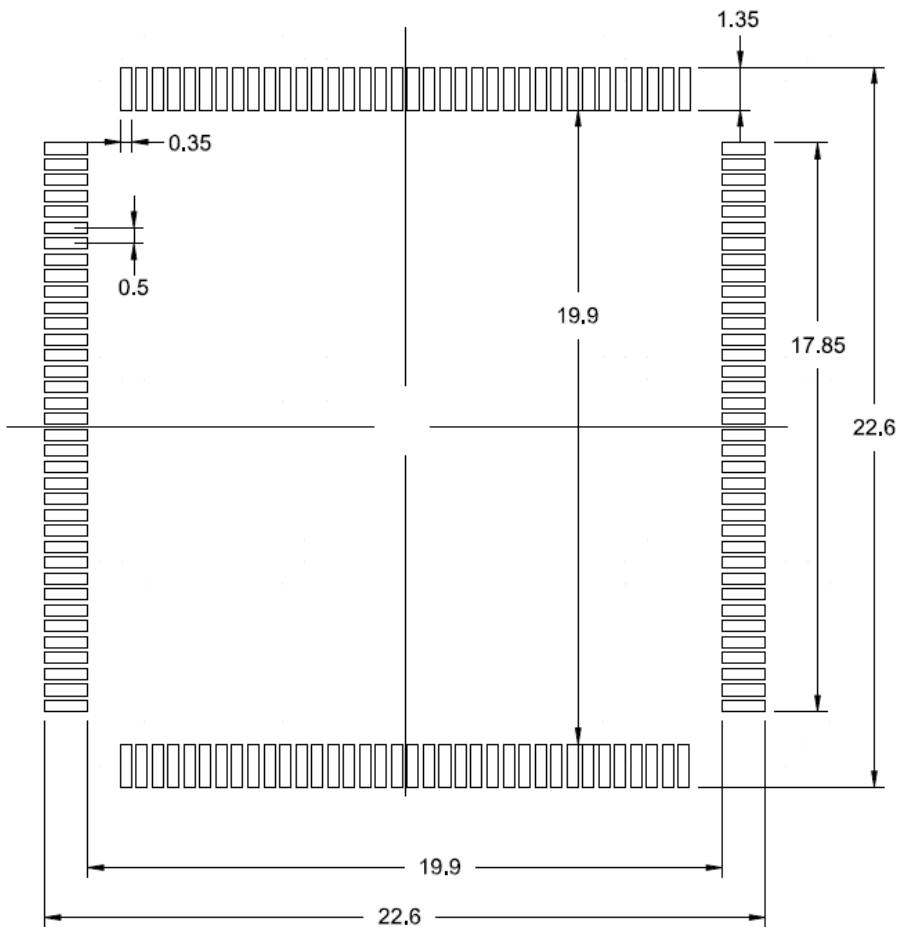



Note: Dimensions are marked in millimeters.

Figure 17 LQFP144 -144 Pins, 20 x20mm Schematic Diagram



## 6.2 LQFP100 package information

Figure 18 LQFP100 Package Diagram

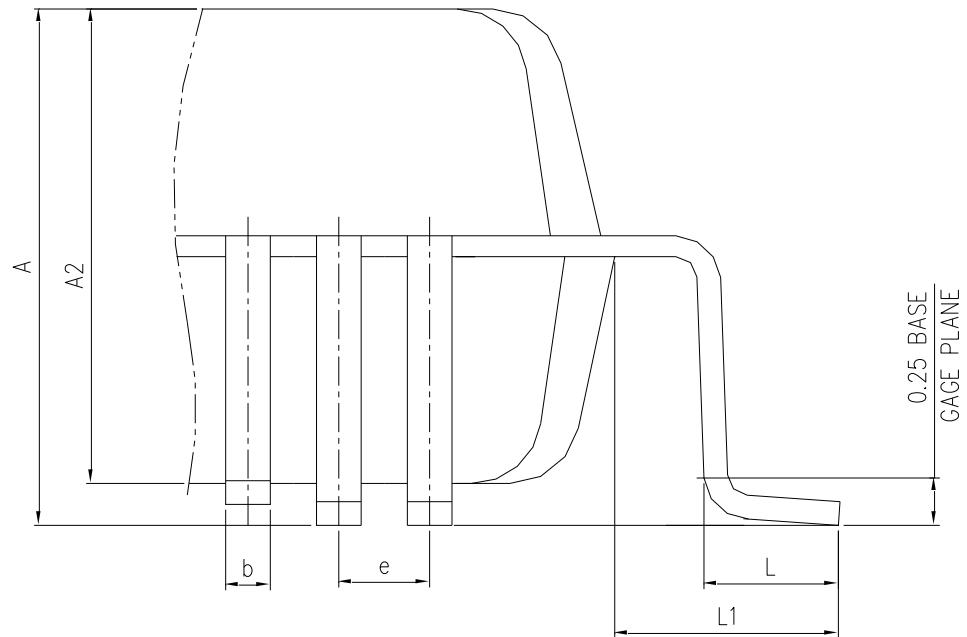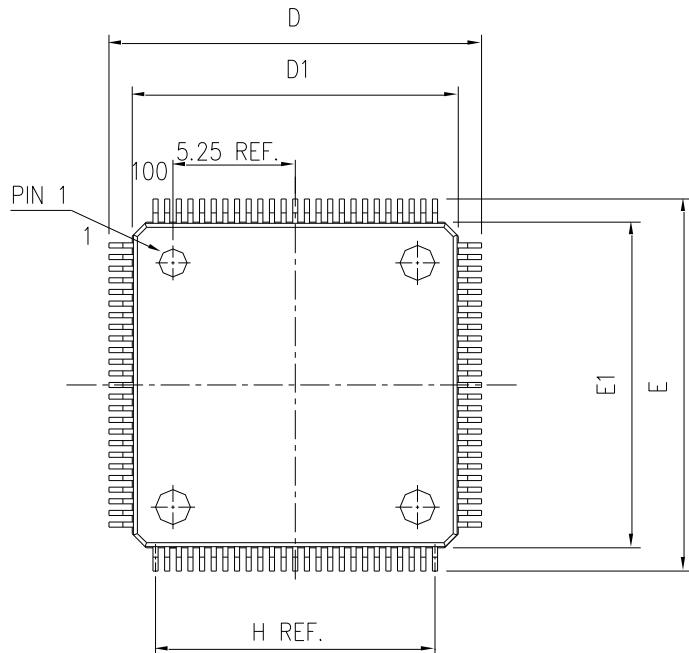


- (1) The figure is not drawn to scale.
- (2) All pins should be soldered to the PCB.

Table 53 LQFP100 Package Data

DIMENSION LIST (FOOTPRINT: 2.00)			
S/N	SYM	DIMENSIONS	REMARKS
1	A	MAX. 1.600	OVERALL HEIGHT
2	A2	1.400±0.050	PKG THICKNESS
3	D	16.000±0.200	LEAD TIP TO TIP
4	D1	14.000±0.100	PKG LENGTH
5	E	16.000±0.200	LEAD TIP TO TIP
6	E1	14.000±0.100	PKG WDTH
7	L	0.600±0.150	FOOT LENGTH
8	L1	1.000 REF	LEAD LENGTH
9	e	0.500 BASE	LEAD PITCH
10	H (REF)	(12.00)	CUM LEAD PITCH
11	b	0.22±0.050	LEAD WIDTH


Note: Dimensions are marked in millimeters.

Figure 19 LQFP100 - 100 Pins, 14 x 14mm Welding Layout Recommendations

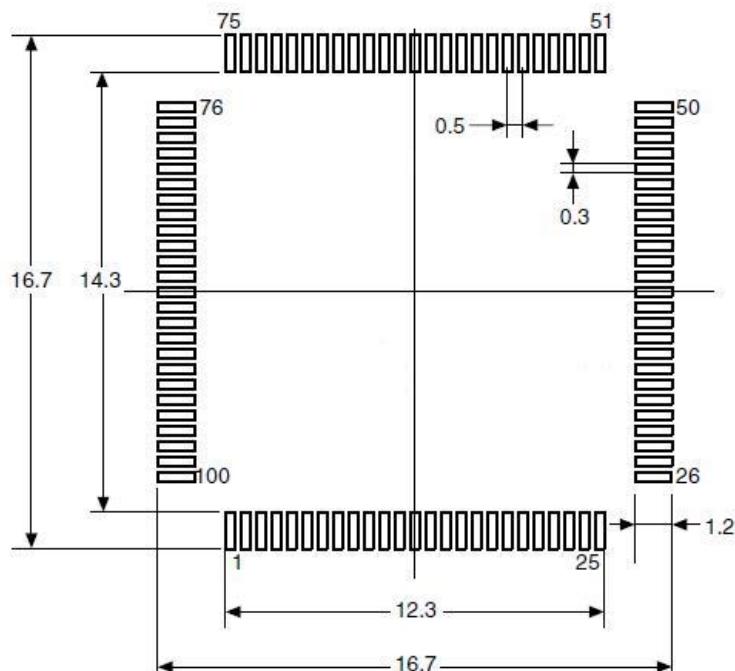

Note: Dimensions are marked in millimeters.


Figure 20 LQFP100 - 100 Pins, 14 x 14mm Package Schematic Diagram

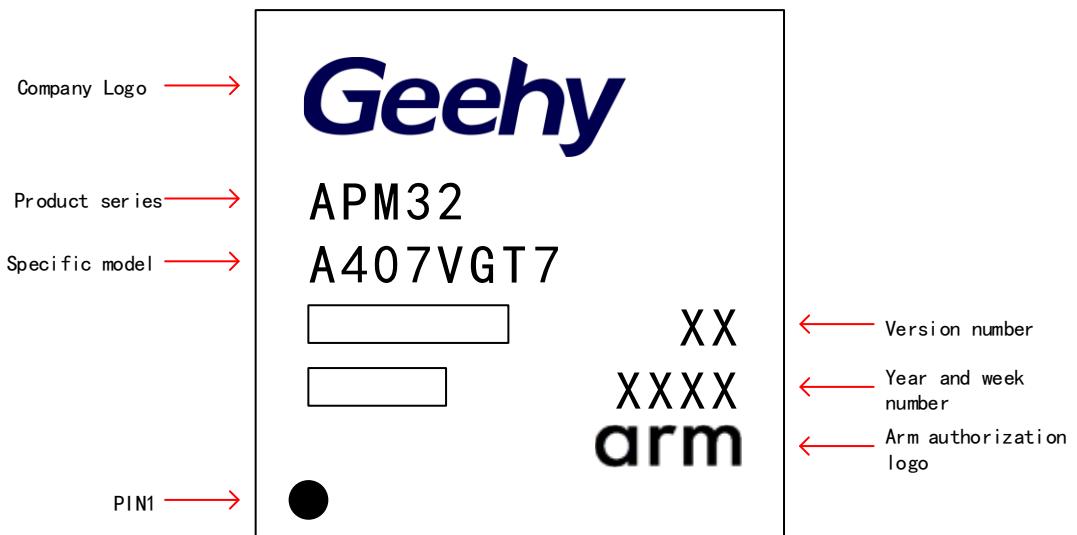


## 7 Packaging Information

### 7.1 Tray packaging

Figure 21 Tray Packaging Diagram

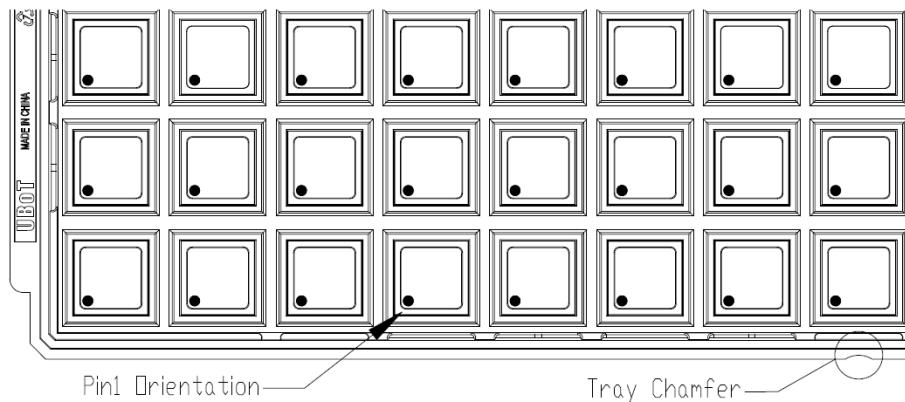

Tray Dimensions

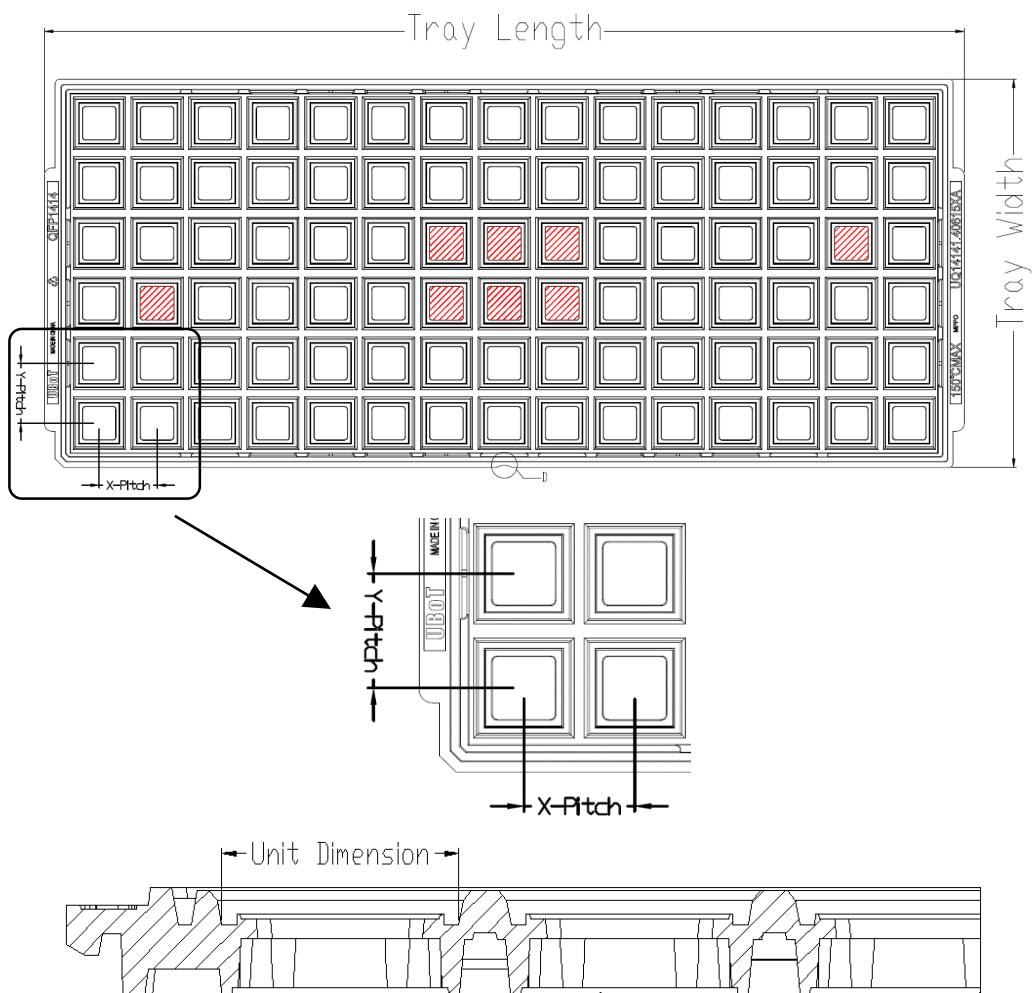

All photos are for reference only, and the appearance is subject to the product

Table 54 Tray Packaging Parameter Specification Table

Device	Package Type	Pins	SPQ	X-Dimension (mm)	Y-Dimension (mm)	X-Pitch (mm)	Y-Pitch (mm)	Tray Length (mm)	Tray Width (mm)
APM32A407ZGT7	LQFP	144	600	22.06	22.06	25.4	25.2	322.6	135.9
APM32A407VGT7	LQFP	100	900	16.6	16.6	20.3	21	322.6	135.9

## 8 Ordering Information

Figure 22 APM32A407xGT7 Series Ordering Information Diagram

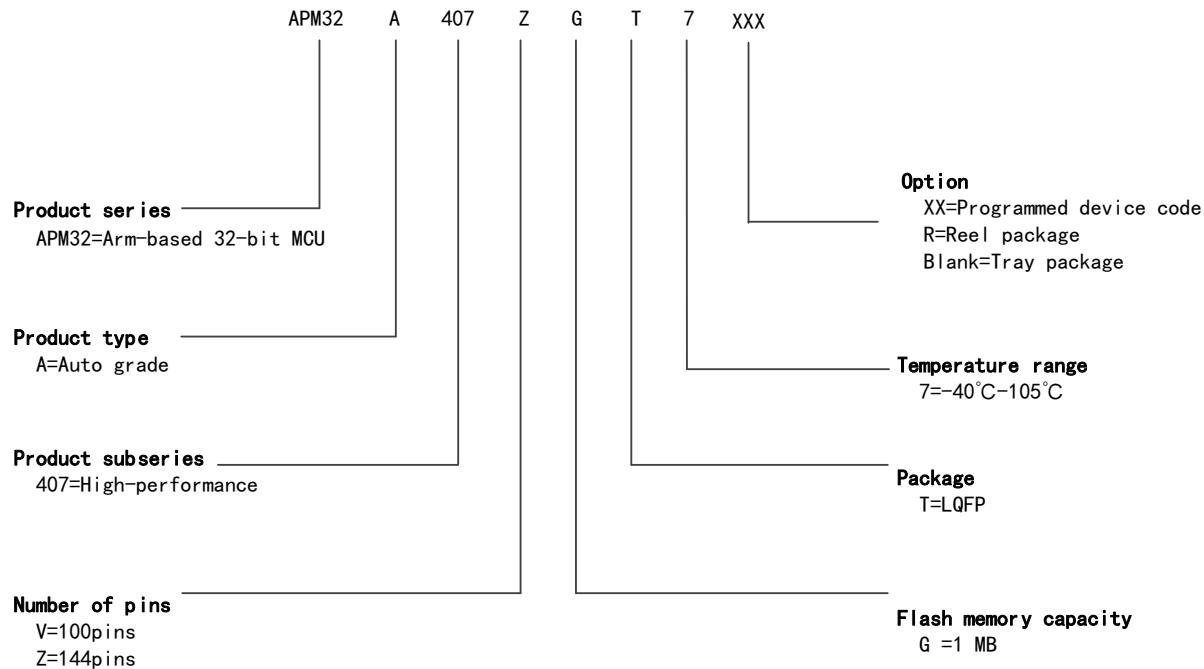


Table 55 Ordering Information Table

Order code	FLASH (KB)	SRAM (KB)	Package	SPQ	Range of temperature
APM32A407ZGT7	1024	192+4	LQFP144	600	-40°C~105°C
APM32A407VGT7	1024	192+4	LQFP100	900	-40°C~105°C

## 9 Commonly Used Function Module Denomination

Table 56 Commonly Used Function Module Denomination

Chinese description	Abbreviations
Reset management unit	RMU
Clock management unit	CMU
Reset and clock management	RCM
External interrupt	EINT
General-purpose IO	GPIO
Multiplexing IO	AFIO
Wake-up controller	WUPT
Buzzer	BUZZER
Independent watchdog timer	IWDT
Window watchdog timer	WWDT
Timer	TMR
CRC controller	CRC
Power Management Unit	PMU
DMA controller	DMA
Analog-to-digital converter	ADC
Real-time clock	RTC
Controller local area network	CAN
I2C Interface	I2C
Serial peripheral interface	SPI
Universal asynchronous transmitter receiver	UART
Universal synchronous and asynchronous transmitter receiver	USART
Flash interface control unit	FMC

## 10 Version History

Table 57 Document Version History

Date	Version	Change History
2022.12	V1.0	New

# Statement

This document is formulated and published by Geehy Semiconductor Co., Ltd. (hereinafter referred to as "Geehy"). The contents in this document are protected by laws and regulations of trademark, copyright and software copyright. Geehy reserves the right to make corrections and modifications to this document at any time. Please read this document carefully before using Geehy products. Once you use the Geehy product, it means that you (hereinafter referred to as the "users") have known and accepted all the contents of this document. Users shall use the Geehy product in accordance with relevant laws and regulations and the requirements of this document.

## 1. Ownership

This document can only be used in connection with the corresponding chip products or software products provided by Geehy. Without the prior permission of Geehy, no unit or individual may copy, transcribe, modify, edit or disseminate all or part of the contents of this document for any reason or in any form.

The "极海" or "Geehy" words or graphics with "®" or "™" in this document are trademarks of Geehy. Other product or service names displayed on Geehy products are the property of their respective owners.

## 2. No Intellectual Property License

Geehy owns all rights, ownership and intellectual property rights involved in this document.

Geehy shall not be deemed to grant the license or right of any intellectual property to users explicitly or implicitly due to the sale or distribution of Geehy products or this document.

If any third party's products, services or intellectual property are involved in this document, it shall not be deemed that Geehy authorizes users to use the aforesaid third party's products, services or intellectual property, unless otherwise agreed in sales order or sales contract.

## 3. Version Update

Users can obtain the latest document of the corresponding models when ordering Geehy products.

If the contents in this document are inconsistent with Geehy products, the agreement in the sales order or the sales contract shall prevail.

## 4. Information Reliability

The relevant data in this document are obtained from batch test by Geehy Laboratory or cooperative third-party testing organization. However, clerical errors in correction or errors caused by differences in testing environment may occur inevitably. Therefore, users should understand that Geehy does not bear any responsibility for such errors that may occur in this document. The relevant data in this document are only used to guide users as performance

parameter reference and do not constitute Geehy's guarantee for any product performance.

Users shall select appropriate Geehy products according to their own needs, and effectively verify and test the applicability of Geehy products to confirm that Geehy products meet their own needs, corresponding standards, safety or other reliability requirements. If losses are caused to users due to the user's failure to fully verify and test Geehy products, Geehy will not bear any responsibility.

## 5. Legality

USERS SHALL ABIDE BY ALL APPLICABLE LOCAL LAWS AND REGULATIONS WHEN USING THIS DOCUMENT AND THE MATCHING GEEHY PRODUCTS. USERS SHALL UNDERSTAND THAT THE PRODUCTS MAY BE RESTRICTED BY THE EXPORT, RE-EXPORT OR OTHER LAWS OF THE COUNTRIES OF THE PRODUCTS SUPPLIERS, GEEHY, GEEHY DISTRIBUTORS AND USERS. USERS (ON BEHALF OR ITSELF, SUBSIDIARIES AND AFFILIATED ENTERPRISES) SHALL AGREE AND PROMISE TO ABIDE BY ALL APPLICABLE LAWS AND REGULATIONS ON THE EXPORT AND RE-EXPORT OF GEEHY PRODUCTS AND/OR TECHNOLOGIES AND DIRECT PRODUCTS.

## 6. Disclaimer of Warranty

THIS DOCUMENT IS PROVIDED BY GEEHY "AS IS" AND THERE IS NO WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

GEEHY WILL BEAR NO RESPONSIBILITY FOR ANY DISPUTES ARISING FROM THE SUBSEQUENT DESIGN OR USE BY USERS.

## 7. Limitation of Liability

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL GEEHY OR ANY OTHER PARTY WHO PROVIDE THE DOCUMENT "AS IS", BE LIABLE FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, DIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE DOCUMENT (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY USERS OR THIRD PARTIES).

## 8. Scope of Application

The information in this document replaces the information provided in all previous versions of the document.

© 2021-2022 Geehy Semiconductor Co., Ltd. - All Rights Reserved