



## Data sheet | Item number: 2007-8821/045-000

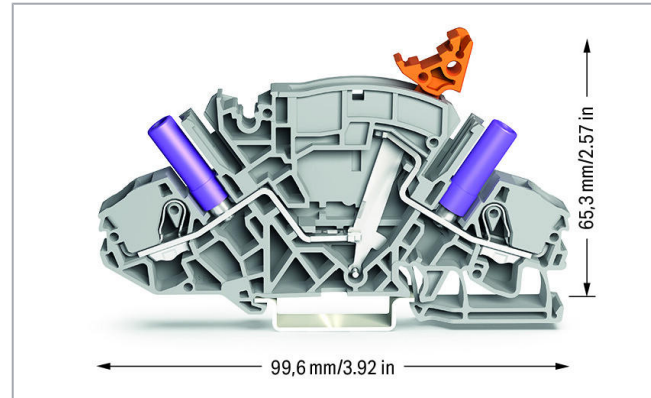

2-conductor disconnect/test terminal block; e.g., current transformer circuits; with receptacle for adjacent jumper with switch lever; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm<sup>2</sup>; Push-in CAGE CLAMP®; 6,00 mm<sup>2</sup>; gray

[www.wago.com/2007-8821/045-000](http://www.wago.com/2007-8821/045-000)

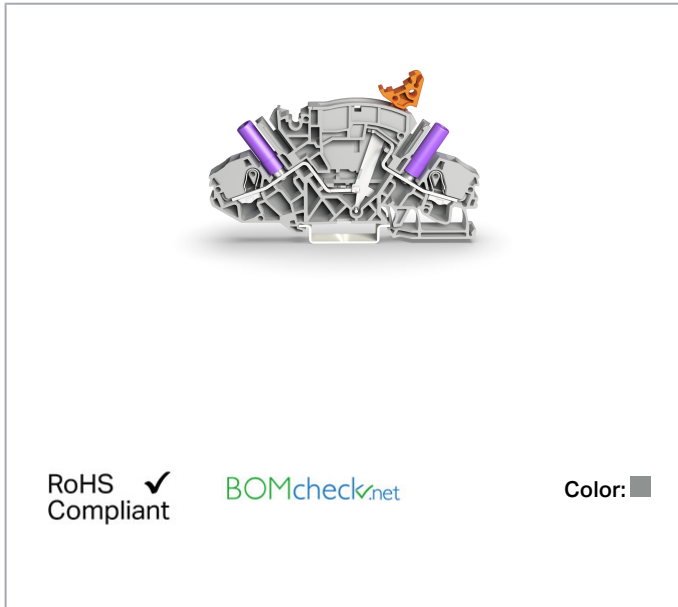

### Data

#### Electrical data

#### Ratings per IEC/EN

Nominal voltage (III/3)	500 V
Rated surge voltage (III/3)	6 kV
Rated current	30 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

#### Ratings per UL

Approvals per	UL 1059
Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	30 A
Rated voltage UL (Use Group C)	300 V
Rated current UL (Use Group C)	30 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Ratings per CSA

Approvals per	C22.2 No 158
Rated voltage CSA (Use Group B)	300 V
Rated current CSA (Use Group B)	30 A
Rated voltage CSA (Use Group C)	300 V
Rated current CSA (Use Group C)	30 A
Rated voltage CSA (Use Group D)	300 V
Rated current CSA (Use Group D)	10 A

## Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-in Open Tool Slot
Connectable conductor materials	Copper
Nominal cross-section	6 mm <sup>2</sup>
Solid conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Solid conductor; push-in termination	1 ... 10 mm <sup>2</sup> / 14 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule	2.5 ... 6 mm <sup>2</sup> / 16 ... 10 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 ... 6 mm <sup>2</sup> / 16 ... 10 AWG
Fine-stranded conductor; with ferrule; push-in termination	2.5 ... 6 mm <sup>2</sup> / 16 ... 10 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inch
Total number of connection points	2
Total number of potentials	2
Number of levels	1
Wiring type	Front-entry wiring
Number of jumper slots	2

## Physical data

Width	8 mm / 0.315 inch
Height	99.6 mm / 3.921 inch

## Mechanical data

Design	angled
Mounting type	DIN-35 rail
Marking level	Center/side marking

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Material data




Color	gray
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Weight	27.8 g

## Commercial data


Packaging type	BOX
Country of origin	CN
GTIN	4055143300254
Customs tariff number	85365080900

## Approvals / Certificates

### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	2198208.01
	CCA DEKRA Certification B.V.	EN 60947	NTR NL-7323
	CSA DEKRA Certification B.V.	C22.2 No. 158	70009679

### Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2

### UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------

Subject to changes. Please also observe the further product documentation!







cURus  
UL International Germany GmbH

UL 1059

E45172







## Required accessories

### End plate



	<b>Item no.: 2007-8891</b> End and separator plate; 1.5 mm thick; without lock-out seal option; gray	<a href="http://www.wago.com/2007-8891">www.wago.com/2007-8891</a>
	<b>Item no.: 2007-8892</b> End and separator plate; 1.5 mm thick; without lock-out seal option; orange	<a href="http://www.wago.com/2007-8892">www.wago.com/2007-8892</a>
	<b>Item no.: 2007-8893</b> End and separator plate; 1.5 mm thick; with lock-out seal option; gray	<a href="http://www.wago.com/2007-8893">www.wago.com/2007-8893</a>
	<b>Item no.: 2007-8894</b> End and separator plate; 1.5 mm thick; with lock-out seal option; orange	<a href="http://www.wago.com/2007-8894">www.wago.com/2007-8894</a>

## Compatible products















### ferrule

	<b>Item no.: 216-208</b> Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow	<a href="http://www.wago.com/216-208">www.wago.com/216-208</a>
	<b>Item no.: 216-262</b> Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	<a href="http://www.wago.com/216-262">www.wago.com/216-262</a>
	<b>Item no.: 216-263</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	<a href="http://www.wago.com/216-263">www.wago.com/216-263</a>
	<b>Item no.: 216-264</b> Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	<a href="http://www.wago.com/216-264">www.wago.com/216-264</a>
	<b>Item no.: 216-266</b> Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	<a href="http://www.wago.com/216-266">www.wago.com/216-266</a>
	<b>Item no.: 216-267</b> Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	<a href="http://www.wago.com/216-267">www.wago.com/216-267</a>

### Marking accessories

	<b>Item no.: 2009-110</b> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>
	<b>Item no.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 2009-115/000-002</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	<a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a>
	<b>Item no.: 2009-115/000-006</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue	<a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a>
	<b>Item no.: 2009-115/000-007</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray	<a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a>
	<b>Item no.: 2009-115/000-012</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange	<a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a>
	<b>Item no.: 2009-115/000-017</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green	<a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a>
	<b>Item no.: 2009-115/000-023</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green	<a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a>
	<b>Item no.: 2009-115/000-024</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet	<a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a>
	<b>Item no.: 2009-198</b> Adaptor; gray	<a href="http://www.wago.com/2009-198">www.wago.com/2009-198</a>
	<b>Item no.: 793-501</b> WMB marking card; as card; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/793-501">www.wago.com/793-501</a>
	<b>Item no.: 793-501/000-002</b> WMB marking card; as card; not stretchable; plain; snap-on type; yellow	<a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>
	<b>Item no.: 793-501/000-005</b> WMB marking card; as card; not stretchable; plain; snap-on type; red	<a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a>
	<b>Item no.: 793-501/000-006</b> WMB marking card; as card; not stretchable; plain; snap-on type; blue	<a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a>
	<b>Item no.: 793-501/000-007</b> WMB marking card; as card; not stretchable; plain; snap-on type; gray	<a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a>
	<b>Item no.: 793-501/000-012</b> WMB marking card; as card; not stretchable; plain; snap-on type; orange	<a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a>

Subject to changes. Please also observe the further product documentation!

**Item no.: 793-501/000-017**

WMB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/793-501/000-017](http://www.wago.com/793-501/000-017)**Item no.: 793-501/000-023**

WMB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/793-501/000-023](http://www.wago.com/793-501/000-023)**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)**Carrier rail****Item no.: 210-112**Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored [www.wago.com/210-112](http://www.wago.com/210-112)**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-114](http://www.wago.com/210-114)**Item no.: 210-115**Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored [www.wago.com/210-115](http://www.wago.com/210-115)**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored [www.wago.com/210-198](http://www.wago.com/210-198)[www.wago.com/210-198](http://www.wago.com/210-198)**Jumper****Item no.: 2007-8442**

Adjacent jumper for switching lever; 2-way; insulated; orange

[www.wago.com/2007-8442](http://www.wago.com/2007-8442)**Item no.: 2007-8443**

Adjacent jumper for switching lever; 3-way; insulated; orange

[www.wago.com/2007-8443](http://www.wago.com/2007-8443)**Item no.: 2007-8444**

Adjacent jumper for switching lever; 4-way; insulated; orange

[www.wago.com/2007-8444](http://www.wago.com/2007-8444)**Item no.: 2007-8445**

Adjacent jumper for switching lever; 5-way; insulated; orange

[www.wago.com/2007-8445](http://www.wago.com/2007-8445)**Item no.: 2007-8446**

Adjacent jumper for switching lever; 6-way; insulated; orange

[www.wago.com/2007-8446](http://www.wago.com/2007-8446)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

















Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.






	<b>Item no.: 2007-8447</b> Adjacent jumper for switching lever; 7-way; insulated; orange	<a href="http://www.wago.com/2007-8447">www.wago.com/2007-8447</a>
	<b>Item no.: 2007-8448</b> Adjacent jumper for switching lever; 8-way; insulated; orange	<a href="http://www.wago.com/2007-8448">www.wago.com/2007-8448</a>
	<b>Item no.: 282-432</b> Jumper; 2-way; insulated; orange	<a href="http://www.wago.com/282-432">www.wago.com/282-432</a>
	<b>Item no.: 282-432/100-000</b> Jumper; 2-way; insulated; orange	<a href="http://www.wago.com/282-432/100-000">www.wago.com/282-432/100-000</a>
	<b>Item no.: 282-433</b> Jumper; 3-way; insulated; orange	<a href="http://www.wago.com/282-433">www.wago.com/282-433</a>
	<b>Item no.: 282-433/100-000</b> Jumper; 3-way; insulated; orange	<a href="http://www.wago.com/282-433/100-000">www.wago.com/282-433/100-000</a>
	<b>Item no.: 282-434</b> Jumper; 4-way; insulated; orange	<a href="http://www.wago.com/282-434">www.wago.com/282-434</a>
	<b>Item no.: 282-434/100-000</b> Jumper; 4-way; insulated; orange	<a href="http://www.wago.com/282-434/100-000">www.wago.com/282-434/100-000</a>
	<b>Item no.: 282-435</b> Jumper; 5-way; insulated; orange	<a href="http://www.wago.com/282-435">www.wago.com/282-435</a>
	<b>Item no.: 282-435/011-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-435/011-000">www.wago.com/282-435/011-000</a>
	<b>Item no.: 282-435/300-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-435/300-000">www.wago.com/282-435/300-000</a>
	<b>Item no.: 282-435/301-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-435/301-000">www.wago.com/282-435/301-000</a>
	<b>Item no.: 282-436</b> Jumper; 6-way; insulated; orange	<a href="http://www.wago.com/282-436">www.wago.com/282-436</a>
	<b>Item no.: 282-436/301-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-436/301-000">www.wago.com/282-436/301-000</a>
	<b>Item no.: 282-436/304-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-436/304-000">www.wago.com/282-436/304-000</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 282-437</b> Jumper; 7-way; insulated; orange	<a href="http://www.wago.com/282-437">www.wago.com/282-437</a>
	<b>Item no.: 282-437/011-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-437/011-000">www.wago.com/282-437/011-000</a>
	<b>Item no.: 282-437/012-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-437/012-000">www.wago.com/282-437/012-000</a>
	<b>Item no.: 282-438</b> Jumper; 8-way; insulated; orange	<a href="http://www.wago.com/282-438">www.wago.com/282-438</a>
	<b>Item no.: 282-438/300-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-438/300-000">www.wago.com/282-438/300-000</a>
	<b>Item no.: 282-438/301-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-438/301-000">www.wago.com/282-438/301-000</a>
	<b>Item no.: 282-439</b> Jumper; 9-way; insulated; orange	<a href="http://www.wago.com/282-439">www.wago.com/282-439</a>
	<b>Item no.: 282-439/011-000</b> Jumper; insulated; orange	<a href="http://www.wago.com/282-439/011-000">www.wago.com/282-439/011-000</a>
	<b>Item no.: 282-440</b> Jumper; 10-way; insulated; orange	<a href="http://www.wago.com/282-440">www.wago.com/282-440</a>
<b>Locking lever</b>		
	<b>Item no.: 210-254</b> Interlocking link; mechanically locks multiple links; 1 m long; transparent	<a href="http://www.wago.com/210-254">www.wago.com/210-254</a>
	<b>Item no.: 282-881</b> Locking cover; mechanically locks multiple links; 1-pole; transparent	<a href="http://www.wago.com/282-881">www.wago.com/282-881</a>
	<b>Item no.: 282-882</b> Locking cover; mechanically locks multiple links; 2-pole; transparent	<a href="http://www.wago.com/282-882">www.wago.com/282-882</a>
	<b>Item no.: 282-883</b> Locking cover; mechanically locks multiple links; 3-pole; transparent	<a href="http://www.wago.com/282-883">www.wago.com/282-883</a>
	<b>Item no.: 282-884</b> Locking cover; mechanically locks multiple links; 4-pole; transparent	<a href="http://www.wago.com/282-884">www.wago.com/282-884</a>
	<b>Item no.: 282-885</b> Locking cover; mechanically locks multiple links; 5-pole; transparent	<a href="http://www.wago.com/282-885">www.wago.com/282-885</a>
	<b>Item no.: 282-886</b> Locking cover; mechanically locks multiple links; 6-pole; transparent	<a href="http://www.wago.com/282-886">www.wago.com/282-886</a>

Subject to changes. Please also observe the further product documentation!



	<b>Item no.: 282-887</b> Locking cover; mechanically locks multiple links; 7-pole; transparent	<a href="http://www.wago.com/282-887">www.wago.com/282-887</a>
	<b>Item no.: 282-888</b> Locking cover; mechanically locks multiple links; 8-pole; transparent	<a href="http://www.wago.com/282-888">www.wago.com/282-888</a>
<b>Protective Warning Marker</b>		
	<b>Item no.: 2006-115</b> Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow	<a href="http://www.wago.com/2006-115">www.wago.com/2006-115</a>
<b>General accessories</b>		
	<b>Item no.: 2007-8899</b> Lock-out; for disconnect link; yellow	<a href="http://www.wago.com/2007-8899">www.wago.com/2007-8899</a>
<b>tools</b>		
	<b>Item no.: 210-721</b> Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured	<a href="http://www.wago.com/210-721">www.wago.com/210-721</a>

## Downloads

### Documentation

#### Additional Information

Technical explanations	3. 4. 2019	pdf 2.2 MB	Download
------------------------	------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 2007-8821/045-000	URL	Download
--------------------------------	-----	----------

### CAE data

EPLAN Data Portal 2007-8821/045-000	URL	Download
WSCAD Universe 2007-8821/045-000	URL	Download
ZUKEN Portal 2007-8821/045-000	URL	Download
WSCAD Universe 2007-8821/045-000	URL	Download
EPLAN Data Portal 2007-8821/045-000	URL	Download

Subject to changes. Please also observe the further product documentation!

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 2007-8821/045-000


[URL](#)

[Download](#)

2-conductor disconnect/test terminal block; e.g., current transformer circuits; with receptacle for adjacent jumper with switch lever; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm<sup>2</sup>; Push-in CAGE CLAMP®; 6,00 mm<sup>2</sup>; gray


## Installation Notes

### Conductor termination

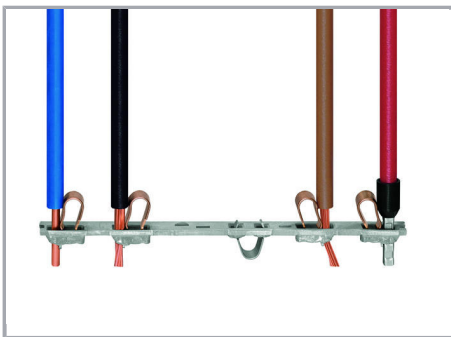

All conductor types at a glance

### Commoning

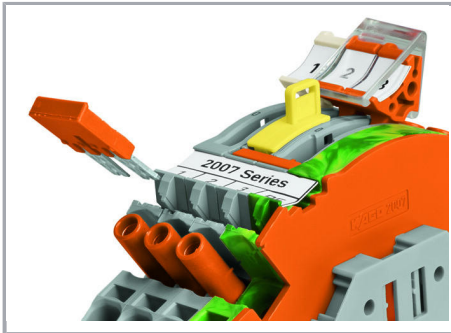

Additional commoning option on the transformer side



Preparing shorting path for the current transformer circuits.




Insert insulated, touch-proof circuit jumpers into jumper slot.

Subject to changes. Please also observe the further product documentation!




Insert insulated, touch-proof circuit jumpers into jumper slot.

### Safety

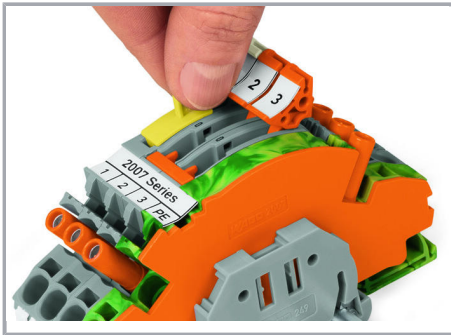


Lock-out prevents accidental operation of disconnect link.

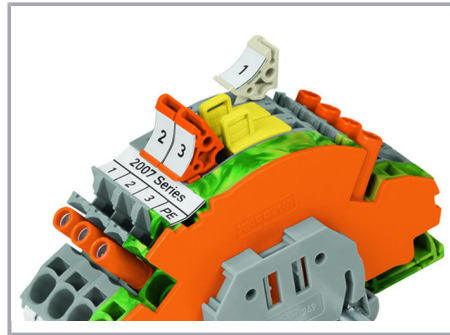


Lock-out snaps into one of two notched positions.


### Locking system

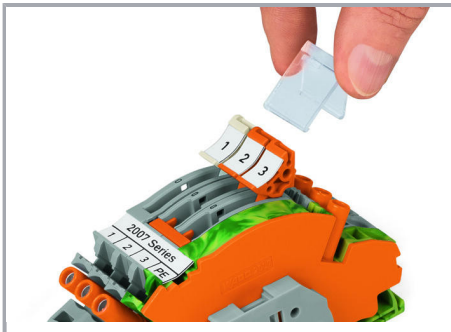

Using locking covers or profiles for adjacent terminal blocks allows disconnect links to be operated simultaneously.

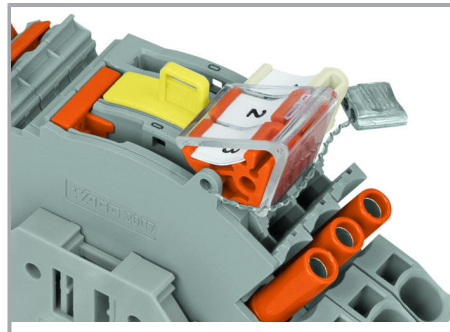


A lock-out seal can be used on the disconnect link in operating position I when combined with an end and separator plate (2007-8893 or 2007-8894).

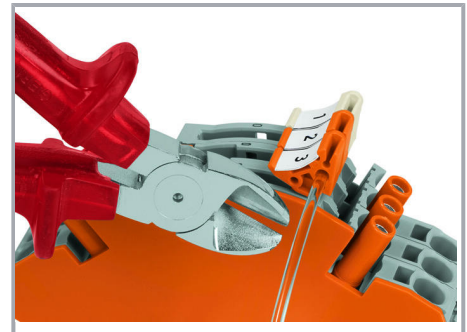


Interlocking link mechanically locks multiple links for multi-pole switching applications.


Subject to changes. Please also observe the further product documentation!

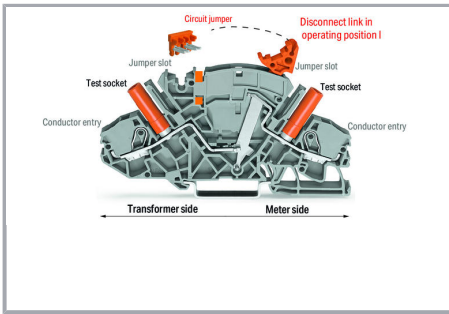


Disconnect/Test Terminal Block (2007-8821)

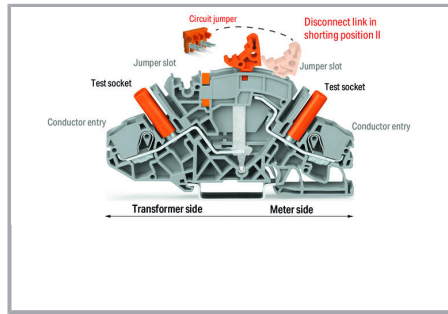


Disconnect/Test Terminal Block (2007-8821)

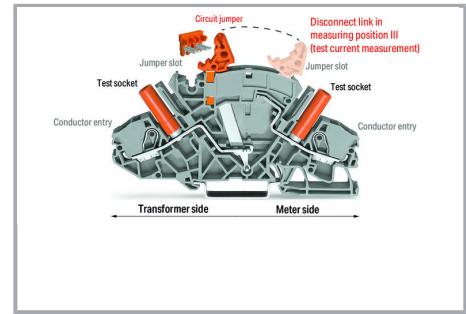


Disconnect/Test Terminal Block (2007-8821)

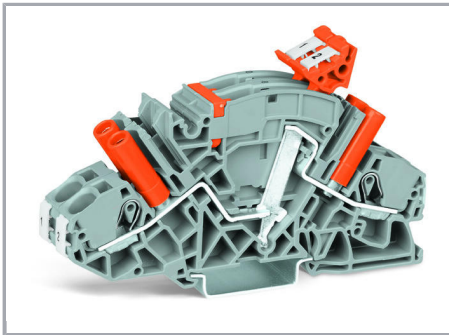

Disconnect link in operating position I

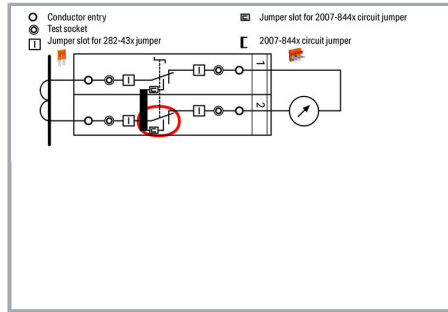

In the operating position, the measurement device is connected to the transformer, the circuit jumper is inserted and the disconnect link is in position I.

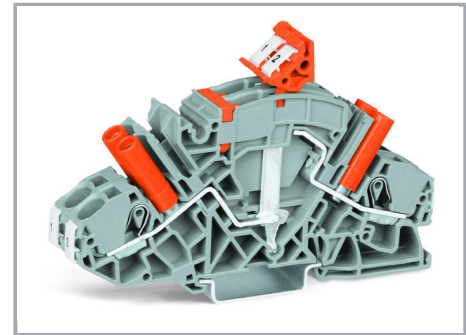

Disconnect link in shorting position II


Terminal blocks required:

2 x disconnect/test terminal block (2007-8821)


1 x circuit jumper, orange (2007-8442)

Locking covers or interlocking links (option)


Subject to changes. Please also observe the further product documentation!

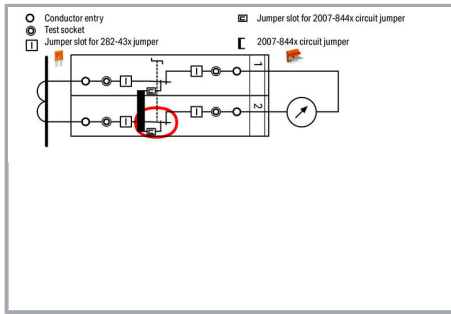


The transformer is not disconnected from the measuring device yet, the shorting path is activated by moving the disconnect link into shorting position II and the transformer is safely shorted.

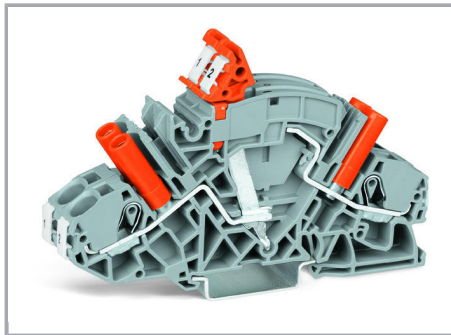

**Test current measurement: Disconnect link in measuring position III**

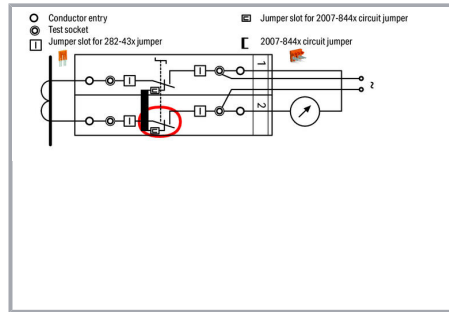

The measuring device is electrically disconnected from the transformer. If required, an external voltage can be applied to the measuring device via the test socket.

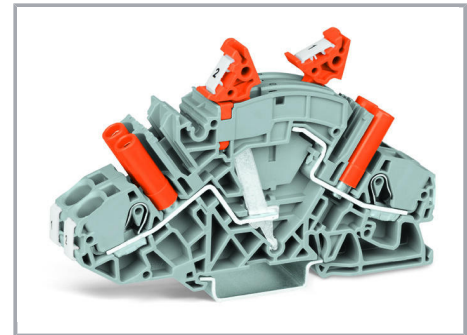


**Measurement testing (using both test sockets)**


Terminal block 1: Disconnect link in operating position I

Terminal block 2: Disconnect link in measuring position III

Subject to changes. Please also observe the further product documentation!

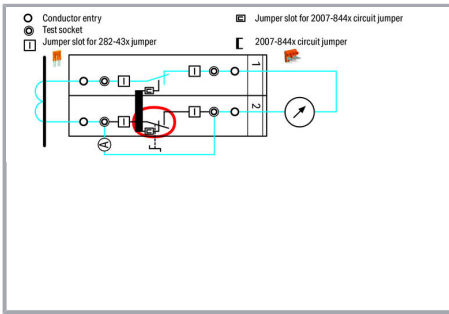

Measurement testing: First insert the reference current meter (A) into the test socket, then move the disconnect link into measurement point III (test current measurement).

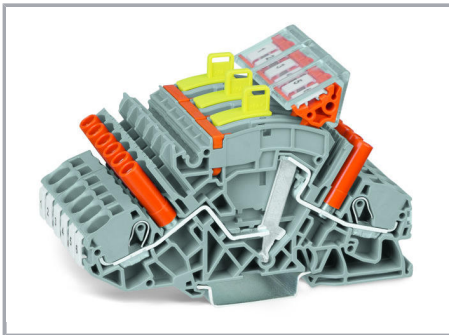


**Measuring set for a three-phase current transformer**

Terminal blocks required:


6 x disconnect/test terminal block (2007-8821)

3 x circuit jumper, orange (2007-8442)

In addition: interlocking link, locking cover, lock-out

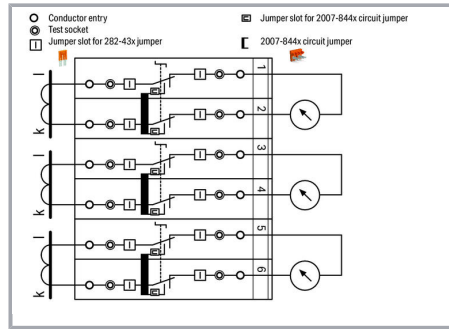

Pairs of disconnect links are interconnected via locking cover or interlocking link. Measurement testing is performed after the interlocking is released.

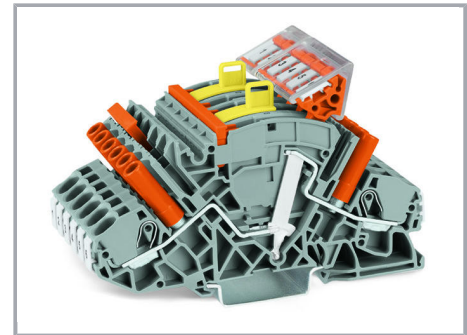

**Measuring set for a three-phase current transformer with 'Y' point**

Terminal blocks required:

6 x disconnect/test terminal block (2007-8821)


1 x circuit jumper, orange (2007-8446)

1 x jumper, orange (282-433)

In addition: interlocking link, locking cover, lock-out


Subject to changes. Please also observe the further product documentation!



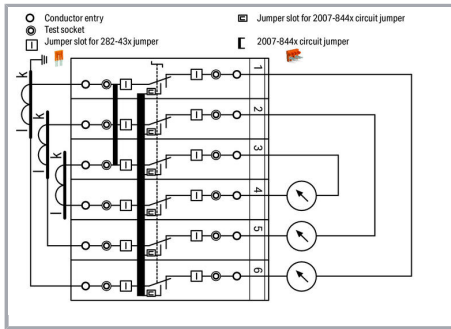

All six disconnect links are interconnected via locking cover or interlocking link.

### Marking

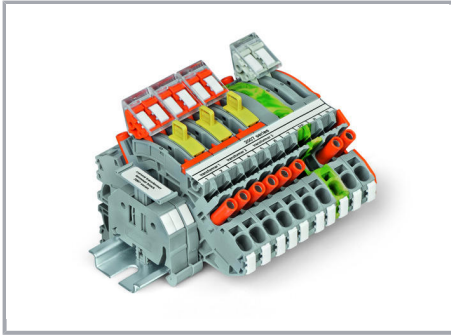

Marking via WMB Multi markers or marking strips.

### Product family

#### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!