






Features

- 180~295VAC input range
- · Built-in active PFC function
- No load power consumption <0.5W
- High efficiency up to 91%
- · Fanless design, cooling by free air convection
- IP67 / IP65 design for indoor or outdoor installations
- · Output current adjustable through output cable or internal potentiometer for A-Type
- Built-in 3 in 1 dimming function for B-Type (0~10Vdc or 10V PWM signal or resistance)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Class 2 power unit
- · Suitable for dry / damp / wet locations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires
- 5 years warranty(Note.8)

Description

ELG-100 series is a 100W LED AC/DC power supply featuring the constant current output and constant voltage output design with low output voltage. The input accepts the wide range 180~295VAC and is equipped with the active PFC function. With the high efficiency up to 91% and the heat-conducted silicone, ELG-100 is able to operate for -40 $^{\circ}$ C ~+90 $^{\circ}$ C case temperature under free air convection.

Model Encoding ELG - 100 - 36



Applications

- · LED street lighting
- LED harbor lighting
- · LED bay lighting
- LED greenhouse lighting
- · Class I, Division 2 hazardous (Classified) location luminaires

Blank: Standard model, IP67, constant current and constant voltage levels fixed

- A: Standard model, IP65, constant current and constant voltage levels adjustable through internal potentiometer
- B: Standard model, IP67, constant current level adjustable with additive 0~10Vdc, 10V PWM signal
- D: Optional model, IP67, Smart timer dimming function. Please contact MEAN WELL for details DA: Optional model, IP67, DALI function


SPECIFICATION

| MODEL | | ELG-100-24 | ELG-100-36 | ELG-100-42 | ELG-100-48 | ELG-100-54 | | | | | | | |
|-------------|---|--|--|-------------------------------|---------------------|--------------|--|--|--|--|--|--|--|
| | DC VOLTAGE | 24V | 36V | 42V | 48V | 54V | | | | | | | |
| | CONSTANT CURRENT REGION Note.4 | 12 ~ 24V | 18 ~ 36V | 21 ~ 42V | 24 ~ 48V | 27 ~ 54V | | | | | | | |
| | RATED CURRENT | 4.0A | 2.66A | 2.28A | 2A | 1.78A | | | | | | | |
| | RATED POWER | 96W | 95.76W | 95.76W | 96W | 96.12W | | | | | | | |
| | RIPPLE & NOISE (max.) Note.2 | 200mVp-p | 250mVp-p | 250mVp-p | 300mVp-p | 350mVp-p | | | | | | | |
| | , , | Can be adjusted by internal potentiometer for A-Type only | | | | | | | | | | | |
| | VOLTAGE ADJ. RANGE | 21.6 ~ 26.4V 32.4 ~ 39.6V 37.8 ~ 46.2V 43.2 ~ 52.8V 48.6 ~ 59.4V | | | | | | | | | | | |
| DUTPUT | CURRENT AR L RANGE | Can be adjusted by internal potentiometer for A-Type only | | | | | | | | | | | |
| | CURRENT ADJ. RANGE | 2~4A | 1.33 ~ 2.66A | 1.14 ~ 2.28A | 1 ~ 2A | 0.89 ~ 1.78A | | | | | | | |
| | VOLTAGE TOLERANCE Note.3 | ±3.0% | ±2.5% | ±2.5% | ±2.0% | ±2.0% | | | | | | | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | | | | | | |
| | LOAD REGULATION | ±1.0% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | | | | | | | |
| | | 500ms, 100ms at 95% lo | | 201070 | | 1 | | | | | | | |
| | HOLD UP TIME (Typ.) | 10ms at 95% load 230 | | | | | | | | | | | |
| | | 180 ~ 295VAC | | | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | | | |
| | POWER FACTOR | | | | | | | | | | | | |
| | | PF≥0.95/230VAC PF≥0.92/277VAC at full load (Please refer to "Power Factor Characteristic curve") | | | | | | | | | | | |
| NPUT | TOTAL HARMONIC DISTORTION | THD< 20% when output loading≧50% at 230VAC input and output loading≧75% at 277VAC input | | | | | | | | | | | |
| MEUI | EFFICIENCY (Typ.) | 88% | 89% | 90% | 90% | 91% | | | | | | | |
| | AC CURRENT | | 277VAC | F00/ In a als) a/ 000\/A C | | | | | | | | | |
| | INRUSH CURRENT(Typ.) | COLD START 60A(twidt | COLD START 60A(twidth=850µs measured at 50% lpeak) at 230VAC | | | | | | | | | | |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC | | | | | | | | | | | |
| | LEAKAGE CURRENT | <0.75mA / 277VAC | | | | | | | | | | | |
| | OVED CURRENT | 95 ~ 108% | | | | | | | | | | | |
| | OVER CURRENT | Protection type: Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | | | | |
| | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | | | | |
| PROTECTION | OVERVOLTACE | 28 ~ 34V | 41 ~ 48V | 47 ~ 54V | 54 ~ 62V | 62 ~ 72V | | | | | | | |
| | OVER VOLTAGE | Protection type : Shut d | own o/p voltage, re-p | ower on to recovery | | | | | | | | | |
| | OVER TEMPERATURE | Shut down o/p voltage, | re-power on to recove | ery | | | | | | | | | |
| | WORKING TEMP. | Tcase=-40 ~ +90°C (Refer to "Derating Curve") | | | | | | | | | | | |
| | MAX. CASE TEMP. | Tcase=+90°C | | | | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | | | | | | | | | |
| ENVIRONMENT | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 60°C) | | | | | | | | | | | |
| | VIBRATION | , | 1 cycle, period for 72m | in. each along X, Y, Z axes | | | | | | | | | |
| | SAFETY STANDARDS | · | | • • • | 65 or IP67 approved | | | | | | | | |
| CAFETYO | WITHSTAND VOLTAGE | UL8750(type"HL"), EN61347-1, EN61347-2-13 independent, EN62384,IP65 or IP67 approved I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC | | | | | | | | | | | |
| SAFETY & | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-F0 | | | | | | | | | | | |
| EMC | EMC EMISSION | | | C (≥50% loading) ; EN610 | 00-3-3 | | | | | | | | |
| | EMC IMMUNITY | · · | | 1547, light industry level (s | | | | | | | | | |
| | MTBF | | HDBK-217F (25°€) | 1017, ngitt industry iever (s | aigo oitti | | | | | | | | |
| OTHERS | DIMENSION | 199*63*35.5mm (L*W*H | | | | | | | | | | | |
| JIIILKO | | | , | | | | | | | | | | |
| NOTE | ACKING 0.75kg; 16pcs/13kg/0.72CUFT 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVING METHODS OF LED MODULE". 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 7. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 8. Refer to warranty statement. | | | | | | | | | | | | |




■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

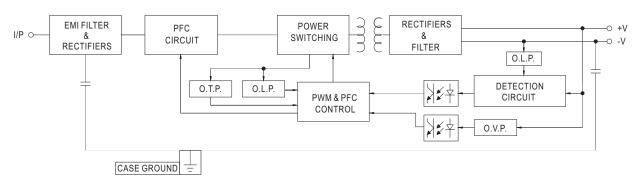


■ Derating Curve

■ Static Characteristics

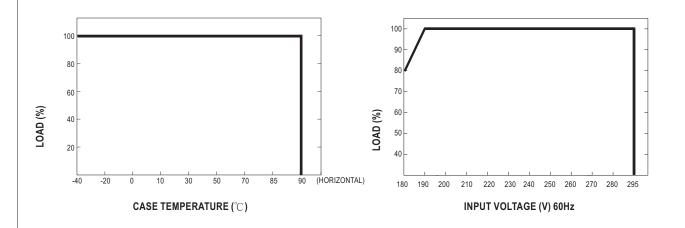




■ Power Factor Characteristic

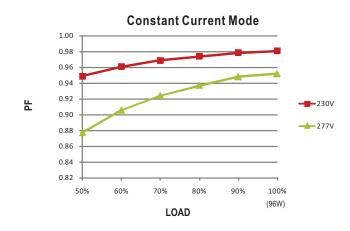

■ EFFICIENCY vs LOAD (54V Model)

ELG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

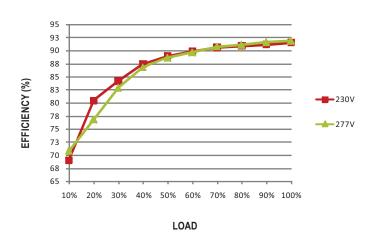


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method, "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV)" or "constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

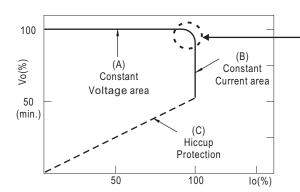

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION(for B-Type only)



- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)


| Resistance value | Single driver | Short | 10KΩ | 20K Ω | 30KΩ | 40K Ω | 50KΩ | 60KΩ | 70KΩ | 80KΩ | 90KΩ | 100KΩ | OPEN |
|-----------------------------|---|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|----------|
| | Multiple drivers (N=driver quantity for synchronized dimming operation) | Short | 10K Ω /N | 20K Ω /N | 30K Ω /N | 40K Ω /N | 50K Ω /N | 60K Ω /N | 70K Ω /N | 80K Ω /N | 90K Ω /N | 100K Ω /N | |
| Percentage of rated current | | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |

| Dimming value | 0V | 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN |
|-----------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |

* 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

| Duty value | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN |
|-----------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |


O Dimming Characteristic

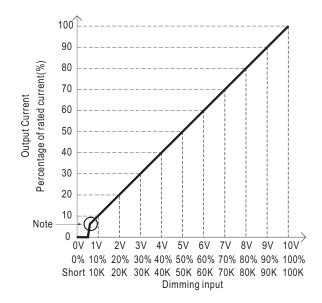

0~10VDuty cycle of 10V PWM (frequency range = 100~3KHz) Short ~ 100 K Ω resistance


 \divideontimes Note : The output current drops down to 0% when the dimming input is about 6K Ω or 0.6Vdc, or 10V PWM signal with 6% duty cycle.



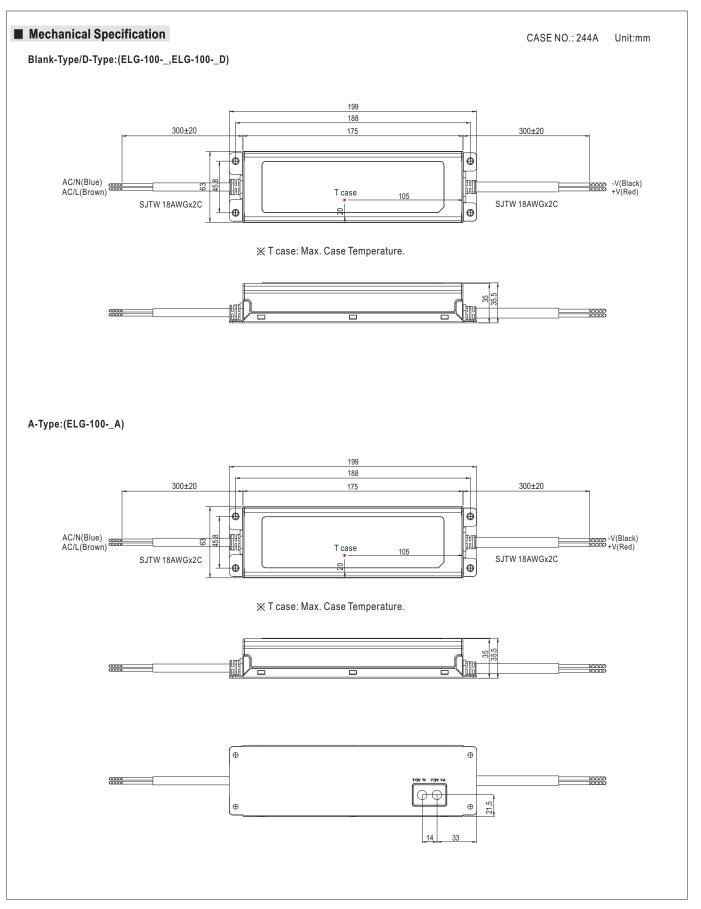



B-Type/DA-Type:(ELG-100-_B/ELG-100-_DA)

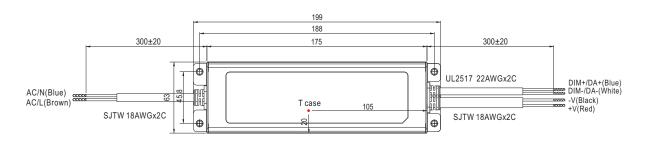

※ T case: Max. Case Temperature.



■ Installation Manual

Please refer to: http://www.meanwell.com/webnet/search/InstallationSearch.html