

# POWER RELAY

## 1 POLE - 3A/5A Slim Type Relay

### FTR-F3 Series

#### ■ FEATURES

- High density mounting  
Slim type with 7mm width and 142mm<sup>2</sup> mounting space
- High insulation  
Insulation distance: minimum 6mm between coil and contact (conforms to IEC 60065)  
Dielectric strength: 4KV  
Surge strength: 10KV
- Glow wire compliant type available which satisfies GWT required for relay in IEC/EN60335-1
- Cadmium free contact for eco-program
- Safety standards  
UL, CSA, VDE, CQC
- Plastic sealed relay, RTIII
- RoHS compliant  
Please see page 6 for more information



#### ■ PARTNUMBER INFORMATION

[Example]  $\frac{\text{FTR-F3}}{\text{(a)}} \frac{\text{A}}{\text{(b)}} \frac{\text{A}}{\text{(c)}} \frac{\text{012}}{\text{(d)}} \frac{\text{E}}{\text{(e)}} - \frac{\text{HA}}{\text{(f)}} - \frac{\text{GW}}{\text{(g)}}$

|     |                       |                 |   |
|-----|-----------------------|-----------------|---|
| (a) | Relay type            | FTR-F3          | : FTR-F3-Series   |
| (b) | Contact configuration | A               | : 1 form A (SPST-NO)  |
| (c) | Coil type (power)     | A               | : 200mW   |
| (d) | Coil rated voltage    | 012             | : 5.....24 VDC<br>Coil rating table at page 3                                     |
| (e) | Contact material      | E               | : AgNi  |
| (f) | Contact rating        | Nil<br>HA<br>KS | : 3A type flux free<br>: 5A type sealing confirmed<br>: 3A type sealing confirmed |
| (g) | Special type          | GW              | : Comply with GWEPT (IEC60695-2-11)   |

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-F3AA012E-HA

Actual marking: F3AA012E

5A 250V~ 5A 30VDC marked on relay

# FTR-F3 SERIES

## ■ SPECIFICATION

| Item             | FTR-F3                       |                                       |   |
|------------------|------------------------------|---------------------------------------|---|
|                  | FTR-F3AA( )E                 |                                       | FTR-F3AA( )E-HA                           |
| Contact Data     | Configuration                | 1 form A (SPST-NO)                    |   |
|                  | Construction                 | Single                                |   |
|                  | Material                     | AgNi                                  |   |
|                  | Resistance (initial)         | Max. 100mOhm at 1A, 6VDC              |   |
|                  | Contact rating (resistive)   | 3A, 125VAC, 30VDC                     | 5A, 250VAC, 30VDC                         |
|                  | Max. carrying current        | 5A                                    |   |
|                  | Max. switching voltage       | 277VAC, 30VDC                         |   |
|                  | Max. switching power         | 750VA, 90W                            | 1,250VA, 150W                             |
|                  | Min. switching load *        | 10 mA, 5VDC                           |   |
| Life             | Mechanical                   | Min. 5 x 10 <sup>6</sup> operations   |   |
|                  | Electrical (at rated load)   | Min. 200 x 10 <sup>3</sup> operations | Min. 100 x 10 <sup>3</sup> operations     |
| Coil Data        | Rated power (20 °C)          | 200mW                                 |   |
|                  | Operate power                | 113mW                                 |   |
|                  | Operating temperature range  | -40 °C to +70 °C (no frost)           |   |
| Timing Data      | Operate (at nominal voltage) | Max. 10ms (without bounce, no diode)  |   |
|                  | Release (at nominal voltage) | Max. 10ms (without bounce, no diode)  |   |
| Insulation       | Resistance (initial)         | Min. 1,000MOhm at 500VDC              |   |
|                  | Dielectric strength          | Open contacts                         | 750VAC (50/60Hz) 1min                     |
|                  |                              | Contacts to coil                      | 4,000VAC (50/60Hz) 1min                   |
|                  | Surge strength               | Contacts to coil                      | 10,000V / 1.2 x 50µs standard wave        |
|                  | Clearance                    | 6mm                                   |   |
|                  | Creepage                     | 6mm                                   |   |
|                  | EN61810-1, VDE0435           | Voltage                               | 250V                                      |
| Pollution degree |                              | 2                                     |   |
| Material group   |                              | III                                   |   |
| Other            | Vibration resistance         | Misoperation                          | 10 to 55 to 10 Hz single amplitude 0.75mm |
|                  |                              | Endurance                             | 10 to 55 to 10 Hz single amplitude 0.75mm |
|                  | Shock                        | Misoperation                          | Min. 100m/s <sup>2</sup> (11±1ms)         |
|                  |                              | Endurance                             | Min. 1,000m/s <sup>2</sup> (6±1ms)        |
|                  | Weight                       | Approximately 4g                      |   |
|                  | Sealing                      | Plastic sealed RTIII                  |   |

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

200mW type

| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance +/- 10% (Ohm) | Must Operate Voltage (VDC) * | Must Release Voltage (VDC) * | Rated Power (mW) |
|-----------|--------------------------|-------------------------------|------------------------------|------------------------------|------------------|
| 005       | 5                        | 125                           | 3.75                         | 0.5                          | 200              |
| 006       | 6                        | 180                           | 4.5                          | 0.6                          |                  |
| 009       | 9                        | 405                           | 6.75                         | 0.9                          |                  |
| 012       | 12                       | 720                           | 9                            | 1.2                          |                  |
| 018       | 18                       | 1,620                         | 13.5                         | 1.8                          |                  |
| 024       | 24                       | 2,880                         | 18                           | 2.4                          |                  |







Note 1: All values given in the coil table(s) are valid at 20°C ambient temperature, at zero contact current, without pre-energizing and are specified at pulse wave voltage.

Note 2: When applying a higher than rated coil voltage, please refer to the "coil temperature rise" and "operating range". Reference graphs for the effects on the relay operating behaviour.



## ■ SAFETY STANDARDS

| Type | Compliance  | Contact rating   |  |
|------|---|--|--|
|      |   | FTR-F3   | FTR-F3-HA  |
| UL   | UL 508<br>E63614  | Flammability: UL 94-V0 (plastics)  |  |
| CSA  | C22.2 No. 14<br>LR 40304  | 5A, 30VDC/277VAC (resistive)<br>6A, 277VAC (resistive)<br>3A, 30 VDC/ 277 VAC (resistive)<br>1/10 HP, 125VAC<br>1/8 HP, 277VAC<br>Pilot duty: D300 | 3A, 30VDC/277VAC (resistive)<br>6A, 277VAC (resistive)<br>5A, 30 VDC/ 277 VAC (resistive)<br>1/10 HP, 250VAC (UL only),<br>1/10HP 125VAC<br>1/8 HP, 277VAC<br>Pilot duty: D300 |
| VDE  | IEC61810-1  | 3A, 250 VAC, $\cos\phi = 1$<br>3A, 30 VDC, L/R=0ms   | 5A, 250 VAC, $\cos\phi = 1$<br>5A, 30 VDC, L/R=0ms   |
| CQC  | GB/T21711.1, GB15092.1<br>1002049449, 04001010925,<br>17002164382 | 3A 250VAC/30VDC<br>(except-KS type)  | 5A 250VAC/30VDC  |

## CHARACTERISTIC DATA (Reference)

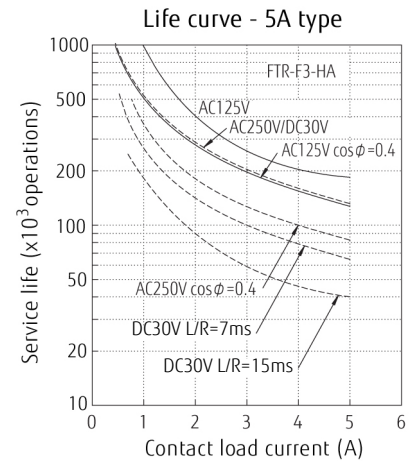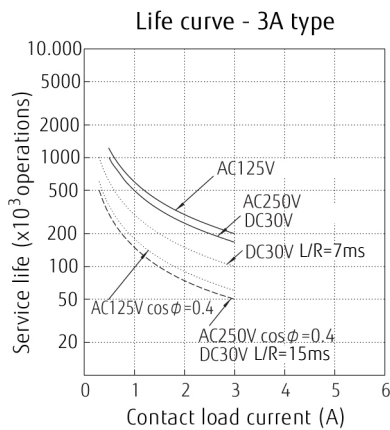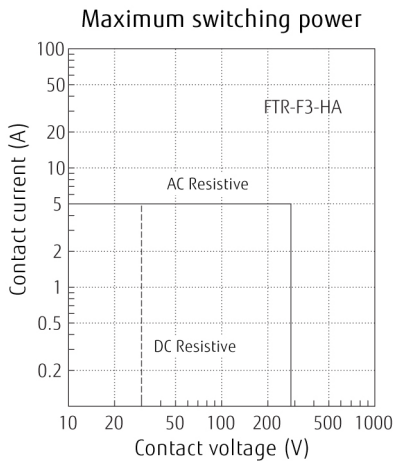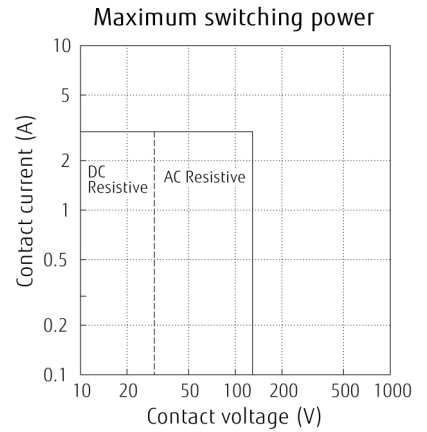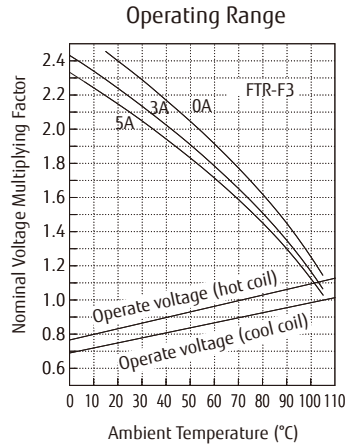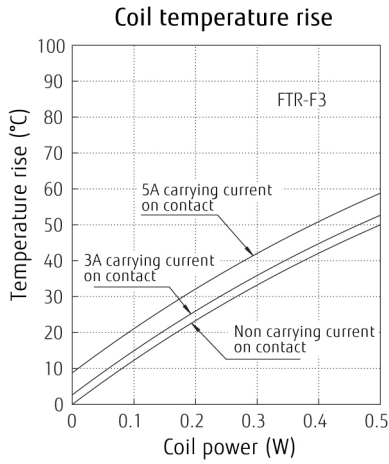


## REFERENCE DATA

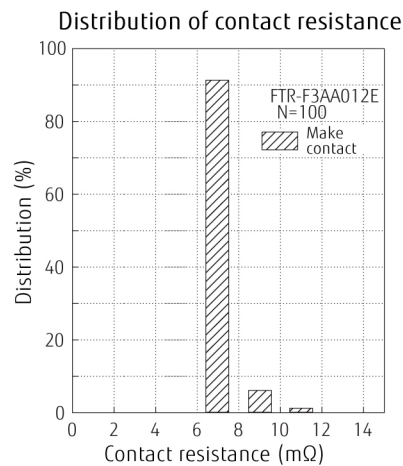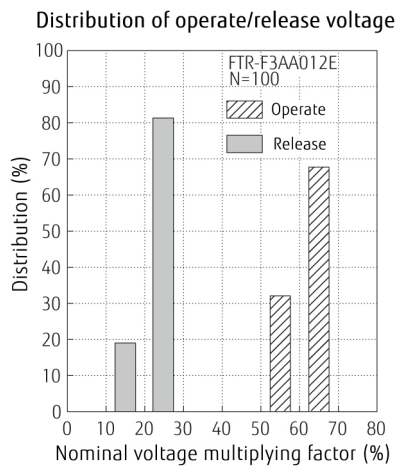


## ■ DIMENSIONS

Standard type


### ● Dimensions

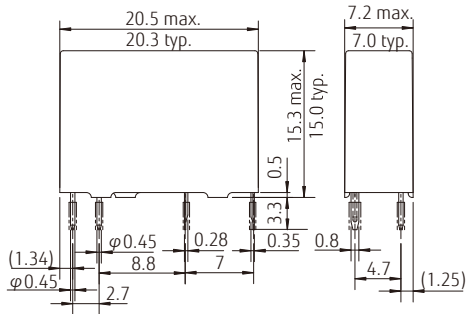

### ● Schematics (BOTTOM VIEW)



### ● PC board mounting hole layout (BOTTOM VIEW)

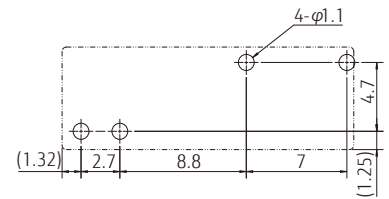

Unit: mm

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: maximum 120°C  
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360°C

Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

|   |   |   |
|---|---|---|
| <p><b>Japan</b><br/>FUJITSU COMPONENT LIMITED<br/>Shinagawa Seaside Park Tower 19F,<br/>12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,<br/>Tokyo, 140-0002, Japan<br/>Tel: (81-3) 3450-1682<br/>Fax: (81-3) 3474-2385<br/>Email: fcl-contact@cs.jp.fujitsu.com<br/>Web: www.fujitsu.com/jp/fcl/</p> | <p><b>Asia Pacific</b><br/>FUJITSU COMPONENTS ASIA, LTD.<br/>102E Pasir Panjang Road<br/>#01-01 Citilink Warehouse Complex<br/>Singapore 118529<br/>Tel: (65) 6375-8560<br/>Fax: (65) 6273-3021<br/>Email: fcal@sg.fujitsu.com<br/>Web: www.fujitsu.com/sg/products/devices/components</p>                        | <p><b>Korea</b><br/>FUJITSU COMPONENTS KOREA LIMITED<br/>Alpha Tower #403, 645 Sampyeong-dong,<br/>Bundang-gu, Seongnam-si, Gyeonggi-do,<br/>13524 Korea<br/>Tel: (82) 31-708-7108<br/>Fax: (82) 31-709-7108<br/>Email: fcal@sg.fujitsu.com<br/>www.fujitsu.com/sg/products/devices/components/</p> |
| <p><b>North and South America</b><br/>FUJITSU COMPONENTS AMERICA, INC<br/>1230 E. Arques Ave. M/S 160<br/>Sunnyvale, CA. 94085, USA<br/>Tel: (1-408) 745-4900<br/>Fax: (1-408) 745-4970<br/>Email: components@us.fujitsu.com<br/>Web: us.fujitsu.com/components</p>                                 | <p><b>China</b><br/>FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.<br/>Unit 4306, InterContinental Center<br/>100 Yu Tong Road, Shanghai 200070,<br/>China<br/>Tel: (86-21) 3253 0998<br/>Fax: (86-21) 3253 0997<br/>Email: fcsh@cn.fujitsu.com<br/>Web: www.fujitsu.com/cn/products/devices/components/</p>  |   |
| <p><b>Europe</b><br/>FUJITSU COMPONENTS EUROPE B.V.<br/>Diamantlaan 25<br/>2132 WV Hoofddorp<br/>Netherlands<br/>Tel: (31-23) 5560910<br/>Fax: (31-23) 5560950<br/>Email: info@fceu.fujitsu.com<br/>Web: www.fujitsu.com/uk/components</p>  | <p><b>Hong Kong</b><br/>FUJITSU COMPONENTS HONG KONG CO., LTD<br/>Unit 506, Inter-Continental Plaza<br/>No.94 Granville Road, Tsim Sha Tsui, Kowloon,<br/>Hong Kong<br/>Tel: (852) 2881-8495<br/>Tex: (852) 2894-9512<br/>Email: fcal@sg.fujitsu.com<br/>Web: www.fujitsu.com/sg/products/devices/components/</p> |   |

© 2020 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch systems, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications.

Fujitsu warrants that its Products, if properly used and serviced, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. May 25, 2020