

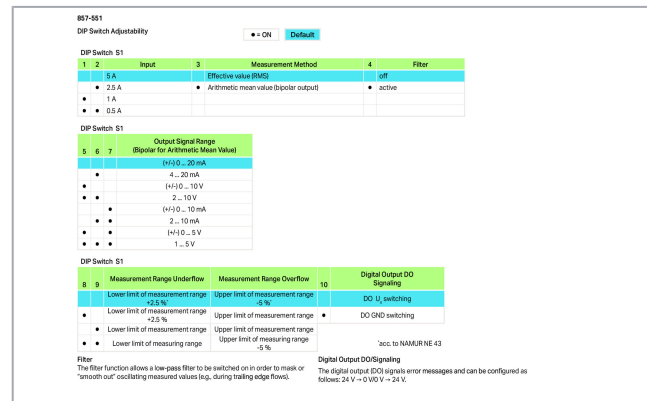
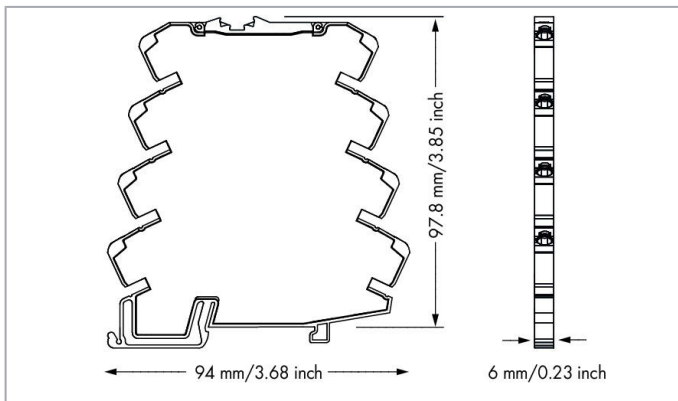


# Data sheet | Item number: 857-551

Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width

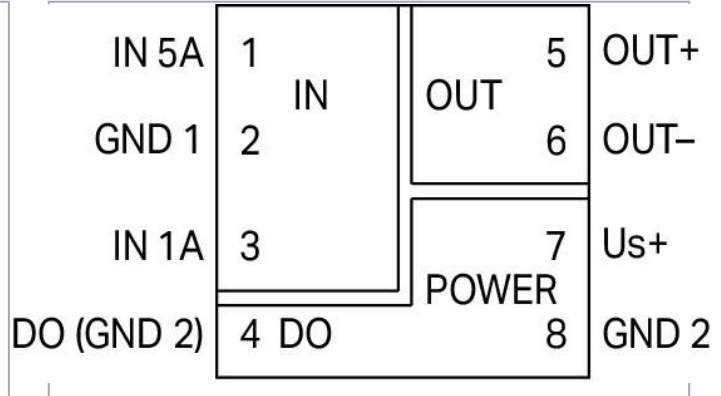

[www.wago.com/857-551](http://www.wago.com/857-551)

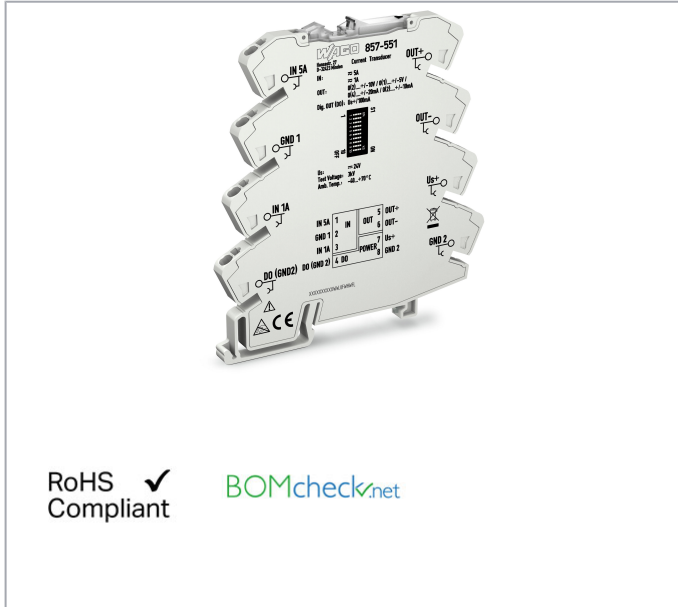

## Item description

### Short description:

WAGO's current signal conditioner measures AC/DC currents up to 5 A, converting the input signal to a standard analog signal at the output.

### Features:

- Two isolated measurement inputs for 1 and 5 A AC/DC (when mounted individually: 6 A AC/DC)
- RMS measurement or arithmetic mean value
- A digital signal output reacts to configured measurement range limits (on/off switching delay and threshold value switch function can be configured with up to two threshold values).

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at 01788 568 008.



- Switchable filter function
- Safe 3-way isolation with 3 kV test voltage per EN 61010-1

**Notes:**

Only the WAGO Interface Configuration Software can be used to set the measurement range of 0 to 6 A.  
Additional setting options via the WAGO Interface Configuration Software

**Data****Technical data****Configuration**

Configuration options	DIP switch WAGO Interface Configuration Software
-----------------------	---

**Input**

Input signal type	Current
Input signal (current)	AC/DC 0 ... 5 A (IN 1; Block arrangement); AC/DC 0 ... 6 A (IN 1; Individual arrangement)
Frequency range	16 ... 200 Hz
Input resistance (current input)	47 mΩ (IN 1); 10 mΩ (IN 2)
Input current (max.)	15 A (IN 1; 5 s); 10 A (IN 3; 5 s)
Response threshold	10 mA (IN 1); 2 mA (IN 3)
Resolution (current)	1 mA (IN 1); 0.5 mA (IN 3)

**Output – analog**

Output signal type	Current Voltage
Output signal (voltage)	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (can be inverted (also bipolar))
Output signal (current)	0 ... 10 mA; 2 ... 10 mA; 0 ... 20 mA; 4 ... 20 mA (can be inverted (also bipolar))
Load impedance (voltage output)	≥ 2 kΩ
Load impedance (current output)	≤ 600 Ω

**Output – digital**

Switching voltage (DO) (max.)	Supply voltage (applied)
Continuous current (DO) (max.)	100 mA (no internal restriction)
Number of switching thresholds (DO)	1 or 2 (adjustable)

Subject to changes. Please also observe the further product documentation!

Configurable rise/fall delay time (DO)	0 ... 60 s (via software)
--	---------------------------

## Signal processing

Measurement method	True RMS measurement; Arithmetic mean value
Software filter (adjustable)	Moving average value (filter level: 30)
Step response (typ.)	60 ms (For software filter 3)
Step response (max.)	250 ms

## Measurement error

Transmission error (max.)	≤ 0.5 % (of the full scale value)
Temperature coefficient	1-A-input: ≤ 0,01 %/K (typ.); ≤ 0,02 %/K (max.); 5-A-input: ≤ 0,02 %/K (typ.); ≤ 0,04 %/K (max.)

## Supply

Nominal supply voltage $U_S$	DC 24 V (SELV)
Supply voltage range	±30 %
Power consumption at nominal supply voltage	≤ 50 mA (+ $I_{DO}$ )

## Safety and protection

Measurement category per EN 61010-2-030	CAT II (input 300 VAC)
Note on insulation parameters	Danger: Configuration via the service interface must only be performed with a voltage-free measurement input! The digital output (DO) is at the potential of the supply
Protection type	IP20

## Test voltage

Test voltage (input/analog output/supply/service interface)	3 kVAC; 50 Hz; 1 min
---	----------------------

## Insulation parameters per EN 61010-1

Line-to-neutral conductor voltage (AC) max.	300 V
Line-to-neutral conductor voltage (DC) max.	300 V
Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply/service interface)	Double insulation (impedance and basic insulation) Requirement: The GND 1 input is dangerous when active and the measurement is conducted as a low-side measurement!

Subject to changes. Please also observe the further product documentation!



## Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

## Physical data

Width	6 mm / 0.236 inch
Height from upper-edge of DIN-rail	97.8 mm / 3.85 inch
Depth	94 mm / 3.701 inch

## Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

## Material data

Weight	38.2 g
--------	--------

## Environmental requirements

Surrounding air temperature (operation)	-40 ... 70 °C (at nominal current)
Surrounding air temperature (storage)	-40 ... 85 °C
Temperature range of the connecting cable according to EN 61010-2-201	$\geq (T_{\text{surrounding air}} + 34 \text{ K})$
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

## Standards and specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2, EN 61326-1
EMC emission of interference	EN 61000-6-3; EN 61326-1
Standards/Specifications	EN 61010-1

## Commercial data

Packaging type	bag
Country of origin	DE
GTIN	4055143967129














Subject to changes. Please also observe the further product documentation!

Customs tariff number

85437090300

## Compatible products






### Jumper

	<b>Item no.: 281-482</b> Jumper; insulated; gray	<a href="http://www.wago.com/281-482">www.wago.com/281-482</a>
	<b>Item no.: 859-402</b> Jumper; for jumper slot; 2-way; insulated; light gray	<a href="http://www.wago.com/859-402">www.wago.com/859-402</a>
	<b>Item no.: 859-402/000-005</b> Jumper; for jumper slot; 2-way; insulated; red	<a href="http://www.wago.com/859-402/000-005">www.wago.com/859-402/000-005</a>
	<b>Item no.: 859-402/000-006</b> Jumper; for jumper slot; 2-way; insulated; blue	<a href="http://www.wago.com/859-402/000-006">www.wago.com/859-402/000-006</a>
	<b>Item no.: 859-402/000-029</b> Jumper; for jumper slot; 2-way; insulated; yellow	<a href="http://www.wago.com/859-402/000-029">www.wago.com/859-402/000-029</a>
	<b>Item no.: 859-403</b> Jumper; for jumper slot; 3-way; insulated; light gray	<a href="http://www.wago.com/859-403">www.wago.com/859-403</a>
	<b>Item no.: 859-403/000-005</b> Jumper; for jumper slot; 3-way; insulated; red	<a href="http://www.wago.com/859-403/000-005">www.wago.com/859-403/000-005</a>
	<b>Item no.: 859-403/000-006</b> Jumper; for jumper slot; 3-way; insulated; blue	<a href="http://www.wago.com/859-403/000-006">www.wago.com/859-403/000-006</a>
	<b>Item no.: 859-403/000-029</b> Jumper; for jumper slot; 3-way; insulated; yellow	<a href="http://www.wago.com/859-403/000-029">www.wago.com/859-403/000-029</a>
	<b>Item no.: 859-404</b> Jumper; for jumper slot; 4-way; insulated; light gray	<a href="http://www.wago.com/859-404">www.wago.com/859-404</a>
	<b>Item no.: 859-404/000-005</b> Jumper; for jumper slot; 4-way; insulated; red	<a href="http://www.wago.com/859-404/000-005">www.wago.com/859-404/000-005</a>
	<b>Item no.: 859-404/000-006</b> Jumper; for jumper slot; 4-way; insulated; blue	<a href="http://www.wago.com/859-404/000-006">www.wago.com/859-404/000-006</a>
	<b>Item no.: 859-404/000-029</b> Jumper; for jumper slot; 4-way; insulated; yellow	<a href="http://www.wago.com/859-404/000-029">www.wago.com/859-404/000-029</a>















Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at 01788 568 008.

	<b>Item no.: 859-405</b> Jumper; for jumper slot; 5-way; insulated; light gray	<a href="http://www.wago.com/859-405">www.wago.com/859-405</a>
	<b>Item no.: 859-405/000-005</b> Jumper; for jumper slot; 5-way; insulated; red	<a href="http://www.wago.com/859-405/000-005">www.wago.com/859-405/000-005</a>
	<b>Item no.: 859-405/000-006</b> Jumper; for jumper slot; 5-way; insulated; blue	<a href="http://www.wago.com/859-405/000-006">www.wago.com/859-405/000-006</a>
	<b>Item no.: 859-405/000-029</b> Jumper; for jumper slot; 5-way; insulated; yellow	<a href="http://www.wago.com/859-405/000-029">www.wago.com/859-405/000-029</a>
	<b>Item no.: 859-406</b> Jumper; for jumper slot; 6-way; insulated; light gray	<a href="http://www.wago.com/859-406">www.wago.com/859-406</a>
	<b>Item no.: 859-406/000-005</b> Jumper; for jumper slot; 6-way; insulated; red	<a href="http://www.wago.com/859-406/000-005">www.wago.com/859-406/000-005</a>
	<b>Item no.: 859-406/000-006</b> Jumper; for jumper slot; 6-way; insulated; blue	<a href="http://www.wago.com/859-406/000-006">www.wago.com/859-406/000-006</a>
	<b>Item no.: 859-406/000-029</b> Jumper; for jumper slot; 6-way; insulated; signal yellow	<a href="http://www.wago.com/859-406/000-029">www.wago.com/859-406/000-029</a>
	<b>Item no.: 859-407</b> Jumper; for jumper slot; 7-way; insulated; light gray	<a href="http://www.wago.com/859-407">www.wago.com/859-407</a>
	<b>Item no.: 859-407/000-005</b> Jumper; for jumper slot; 7-way; insulated; red	<a href="http://www.wago.com/859-407/000-005">www.wago.com/859-407/000-005</a>
	<b>Item no.: 859-407/000-006</b> Jumper; for jumper slot; 7-way; insulated; blue	<a href="http://www.wago.com/859-407/000-006">www.wago.com/859-407/000-006</a>
	<b>Item no.: 859-407/000-029</b> Jumper; for jumper slot; 7-way; insulated; yellow	<a href="http://www.wago.com/859-407/000-029">www.wago.com/859-407/000-029</a>
	<b>Item no.: 859-408</b> Jumper; for jumper slot; 8-way; insulated; light gray	<a href="http://www.wago.com/859-408">www.wago.com/859-408</a>
	<b>Item no.: 859-408/000-005</b> Jumper; for jumper slot; 8-way; insulated; red	<a href="http://www.wago.com/859-408/000-005">www.wago.com/859-408/000-005</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 859-408/000-006</b> Jumper; for jumper slot; 8-way; insulated; blue	<a href="http://www.wago.com/859-408/000-006">www.wago.com/859-408/000-006</a>
	<b>Item no.: 859-408/000-029</b> Jumper; for jumper slot; 8-way; insulated; yellow	<a href="http://www.wago.com/859-408/000-029">www.wago.com/859-408/000-029</a>
	<b>Item no.: 859-409</b> Jumper; for jumper slot; 9-way; insulated; light gray	<a href="http://www.wago.com/859-409">www.wago.com/859-409</a>
	<b>Item no.: 859-409/000-005</b> Jumper; for jumper slot; 9-way; insulated; red	<a href="http://www.wago.com/859-409/000-005">www.wago.com/859-409/000-005</a>
	<b>Item no.: 859-409/000-006</b> Jumper; for jumper slot; 9-way; insulated; blue	<a href="http://www.wago.com/859-409/000-006">www.wago.com/859-409/000-006</a>
	<b>Item no.: 859-409/000-029</b> Jumper; for jumper slot; 9-way; insulated; yellow	<a href="http://www.wago.com/859-409/000-029">www.wago.com/859-409/000-029</a>
	<b>Item no.: 859-410</b> Jumper; for jumper slot; 10-way; insulated; light gray	<a href="http://www.wago.com/859-410">www.wago.com/859-410</a>
	<b>Item no.: 859-410/000-005</b> Jumper; for jumper slot; 10-way; insulated; red	<a href="http://www.wago.com/859-410/000-005">www.wago.com/859-410/000-005</a>
	<b>Item no.: 859-410/000-006</b> Jumper; for jumper slot; 10-way; insulated; blue	<a href="http://www.wago.com/859-410/000-006">www.wago.com/859-410/000-006</a>
	<b>Item no.: 859-410/000-029</b> Jumper; for jumper slot; 10-way; insulated; yellow	<a href="http://www.wago.com/859-410/000-029">www.wago.com/859-410/000-029</a>
<b>General accessories</b>		
	<b>Item no.: 750-921</b> Bluetooth® Adapter; light gray	<a href="http://www.wago.com/750-921">www.wago.com/750-921</a>
	<b>Item no.: 750-923</b> Configuration cable; USB connector; Length: 2.5 m; black	<a href="http://www.wago.com/750-923">www.wago.com/750-923</a>
	<b>Item no.: 750-923/000-001</b> Configuration cable; USB connector; Length: 5 m	<a href="http://www.wago.com/750-923/000-001">www.wago.com/750-923/000-001</a>
	<b>Item no.: 857-304</b> Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 6 A; Yellow status indicator; Module width: 6 mm; 2,50 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/857-304">www.wago.com/857-304</a>














Subject to changes. Please also observe the further product documentation!



**Item no.: 857-979**  
Supply and through module

[www.wago.com/857-979](http://www.wago.com/857-979)

#### Marking accessories

	<b>Item no.: 2009-110</b> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>
	<b>Item no.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>
	<b>Item no.: 2009-115/000-002</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	<a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a>
	<b>Item no.: 2009-115/000-006</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue	<a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a>
	<b>Item no.: 2009-115/000-007</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray	<a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a>
	<b>Item no.: 2009-115/000-012</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange	<a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a>
	<b>Item no.: 2009-115/000-017</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green	<a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a>
	<b>Item no.: 2009-115/000-023</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green	<a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a>
	<b>Item no.: 2009-115/000-024</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet	<a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a>
	<b>Item no.: 793-501</b> WMB marking card; as card; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/793-501">www.wago.com/793-501</a>
	<b>Item no.: 793-501/000-002</b> WMB marking card; as card; not stretchable; plain; snap-on type; yellow	<a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>
	<b>Item no.: 793-501/000-005</b> WMB marking card; as card; not stretchable; plain; snap-on type; red	<a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a>
	<b>Item no.: 793-501/000-006</b> WMB marking card; as card; not stretchable; plain; snap-on type; blue	<a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a>

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at 01788 568 008.





**Item no.: 793-501/000-007**  
WMB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/793-501/000-007](http://www.wago.com/793-501/000-007)



**Item no.: 793-501/000-012**  
WMB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/793-501/000-012](http://www.wago.com/793-501/000-012)



**Item no.: 793-501/000-017**  
WMB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/793-501/000-017](http://www.wago.com/793-501/000-017)



**Item no.: 793-501/000-023**  
WMB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/793-501/000-023](http://www.wago.com/793-501/000-023)



**Item no.: 793-501/000-024**  
WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)



**Item no.: 793-502**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-502](http://www.wago.com/793-502)



**Item no.: 793-502/000-002**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; yellow

[www.wago.com/793-502/000-002](http://www.wago.com/793-502/000-002)



**Item no.: 793-502/000-005**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; red

[www.wago.com/793-502/000-005](http://www.wago.com/793-502/000-005)



**Item no.: 793-502/000-006**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; blue

[www.wago.com/793-502/000-006](http://www.wago.com/793-502/000-006)



**Item no.: 793-502/000-007**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; gray

[www.wago.com/793-502/000-007](http://www.wago.com/793-502/000-007)



**Item no.: 793-502/000-012**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; orange

[www.wago.com/793-502/000-012](http://www.wago.com/793-502/000-012)



**Item no.: 793-502/000-017**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; light green

[www.wago.com/793-502/000-017](http://www.wago.com/793-502/000-017)



**Item no.: 793-502/000-023**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; green

[www.wago.com/793-502/000-023](http://www.wago.com/793-502/000-023)



**Item no.: 793-502/000-024**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type;

[www.wago.com/793-502/000-024](http://www.wago.com/793-502/000-024)

Subject to changes. Please also observe the further product documentation!

violet

**Item no.: 793-503**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503](http://www.wago.com/793-503)  
white**Item no.: 793-503/000-002**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-002](http://www.wago.com/793-503/000-002)  
yellow**Item no.: 793-503/000-005**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-005](http://www.wago.com/793-503/000-005)  
red**Item no.: 793-503/000-006**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-006](http://www.wago.com/793-503/000-006)  
blue**Item no.: 793-503/000-007**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-007](http://www.wago.com/793-503/000-007)  
gray**Item no.: 793-503/000-012**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-012](http://www.wago.com/793-503/000-012)  
orange**Item no.: 793-503/000-017**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-017](http://www.wago.com/793-503/000-017)  
light green**Item no.: 793-503/000-023**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-023](http://www.wago.com/793-503/000-023)  
green**Item no.: 793-503/000-024**WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-503/000-024](http://www.wago.com/793-503/000-024)  
violet**Item no.: 793-504**WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504](http://www.wago.com/793-504)  
white**Item no.: 793-504/000-002**WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-002](http://www.wago.com/793-504/000-002)  
yellow**Item no.: 793-504/000-005**WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-005](http://www.wago.com/793-504/000-005)  
red**Item no.: 793-504/000-006**WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-006](http://www.wago.com/793-504/000-006)  
blue**Item no.: 793-504/000-012**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at 01788 568 008.



WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-012](http://www.wago.com/793-504/000-012)  
orange



**Item no.: 793-504/000-017**  
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-017](http://www.wago.com/793-504/000-017)  
light green



**Item no.: 793-504/000-023**  
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-504/000-023](http://www.wago.com/793-504/000-023)  
green



**Item no.: 793-505**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-505](http://www.wago.com/793-505)  
white



**Item no.: 793-505/000-005**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-505/000-005](http://www.wago.com/793-505/000-005)  
red



**Item no.: 793-505/000-006**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-505/000-006](http://www.wago.com/793-505/000-006)  
blue



**Item no.: 793-505/000-007**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-505/000-007](http://www.wago.com/793-505/000-007)  
gray



**Item no.: 793-505/000-012**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-505/000-012](http://www.wago.com/793-505/000-012)  
orange



**Item no.: 793-506**  
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-506](http://www.wago.com/793-506)  
white



**Item no.: 793-506/000-005**  
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-506/000-005](http://www.wago.com/793-506/000-005)  
red



**Item no.: 793-506/000-006**  
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-506/000-006](http://www.wago.com/793-506/000-006)  
blue



**Item no.: 793-506/000-012**  
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-506/000-012](http://www.wago.com/793-506/000-012)  
orange
















**Item no.: 793-506/000-017**  
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; [www.wago.com/793-506/000-017](http://www.wago.com/793-506/000-017)  
light green



**Item no.: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white [www.wago.com/793-5501](http://www.wago.com/793-5501)

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 793-5501/000-002</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	<a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a>
	<b>Item no.: 793-5501/000-005</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red	<a href="http://www.wago.com/793-5501/000-005">www.wago.com/793-5501/000-005</a>
	<b>Item no.: 793-5501/000-006</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue	<a href="http://www.wago.com/793-5501/000-006">www.wago.com/793-5501/000-006</a>
	<b>Item no.: 793-5501/000-007</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray	<a href="http://www.wago.com/793-5501/000-007">www.wago.com/793-5501/000-007</a>
	<b>Item no.: 793-5501/000-012</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange	<a href="http://www.wago.com/793-5501/000-012">www.wago.com/793-5501/000-012</a>
	<b>Item no.: 793-5501/000-014</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown	<a href="http://www.wago.com/793-5501/000-014">www.wago.com/793-5501/000-014</a>
	<b>Item no.: 793-5501/000-017</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green	<a href="http://www.wago.com/793-5501/000-017">www.wago.com/793-5501/000-017</a>
	<b>Item no.: 793-5501/000-023</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green	<a href="http://www.wago.com/793-5501/000-023">www.wago.com/793-5501/000-023</a>
	<b>Item no.: 793-5501/000-024</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet	<a href="http://www.wago.com/793-5501/000-024">www.wago.com/793-5501/000-024</a>
	<b>Item no.: 793-566</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white	<a href="http://www.wago.com/793-566">www.wago.com/793-566</a>
	<b>Item no.: 793-566/000-002</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; yellow	<a href="http://www.wago.com/793-566/000-002">www.wago.com/793-566/000-002</a>
	<b>Item no.: 793-566/000-005</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; red	<a href="http://www.wago.com/793-566/000-005">www.wago.com/793-566/000-005</a>
	<b>Item no.: 793-566/000-006</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; blue	<a href="http://www.wago.com/793-566/000-006">www.wago.com/793-566/000-006</a>
	<b>Item no.: 793-566/000-007</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type;	

Subject to changes. Please also observe the further product documentation!



gray

[www.wago.com/793-566/000-007](http://www.wago.com/793-566/000-007)
**Item no.: 793-566/000-012**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; orange

[www.wago.com/793-566/000-012](http://www.wago.com/793-566/000-012)
**Item no.: 793-566/000-017**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; light green

[www.wago.com/793-566/000-017](http://www.wago.com/793-566/000-017)
**Item no.: 793-566/000-023**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; green

[www.wago.com/793-566/000-023](http://www.wago.com/793-566/000-023)
**Item no.: 793-566/000-024**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; violet

[www.wago.com/793-566/000-024](http://www.wago.com/793-566/000-024)

#### power supply

**Item no.: 787-2852**

Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current; -

[www.wago.com/787-2852](http://www.wago.com/787-2852)

#### tools

**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

#### transfer module

**Item no.: 857-980**

Interface adapter; 16-pole; analog

[www.wago.com/857-980](http://www.wago.com/857-980)

#### current transformer

**Item no.: 855-1001/2500-1001**

Plug-in current transformer; Primary rated current: 2500 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1

[www.wago.com/855-1001/2500-1001](http://www.wago.com/855-1001/2500-1001)
**Item no.: 855-1005/2500-1001**

Plug-in current transformer; Primary rated current: 2500 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1

[www.wago.com/855-1005/2500-1001](http://www.wago.com/855-1005/2500-1001)
**Item no.: 855-2701/035-001**

Plug-in current transformer; Primary rated current: 35 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1

[www.wago.com/855-2701/035-001](http://www.wago.com/855-2701/035-001)
**Item no.: 855-2701/064-001**

Plug-in current transformer; Primary rated current: 64 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1

[www.wago.com/855-2701/064-001](http://www.wago.com/855-2701/064-001)
**Item no.: 855-3001/060-003**

Split-core current transformer; Primary rated current: 60 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 3; Cable length: 3 m

[www.wago.com/855-3001/060-003](http://www.wago.com/855-3001/060-003)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27














32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?














We are always happy to take your call at 01788 568 008.

	<p><b>Item no.: 855-3001/100-003</b> Split-core current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 3; Cable length: 3 m</p>	<a href="http://www.wago.com/855-3001/100-003">www.wago.com/855-3001/100-003</a>
	<p><b>Item no.: 855-3001/200-001</b> Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m</p>	<a href="http://www.wago.com/855-3001/200-001">www.wago.com/855-3001/200-001</a>
	<p><b>Item no.: 855-3001/250-001</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m</p>	<a href="http://www.wago.com/855-3001/250-001">www.wago.com/855-3001/250-001</a>
	<p><b>Item no.: 855-301/050-103</b> Plug-in current transformer; Primary rated current: 50 A; Secondary rated current: 1 A; Rated power: 1.25 VA; Accuracy class: 3</p>	<a href="http://www.wago.com/855-301/050-103">www.wago.com/855-301/050-103</a>
	<p><b>Item no.: 855-301/060-101</b> Plug-in current transformer; Primary rated current: 60 A; Secondary rated current: 1 A; Rated power: 1.25 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/060-101">www.wago.com/855-301/060-101</a>
	<p><b>Item no.: 855-301/075-201</b> Plug-in current transformer; Primary rated current: 75 A; Secondary rated current: 1 A; Rated power: 2.5 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/075-201">www.wago.com/855-301/075-201</a>
	<p><b>Item no.: 855-301/100-201</b> Plug-in current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 2.5 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/100-201">www.wago.com/855-301/100-201</a>
	<p><b>Item no.: 855-301/150-501</b> Plug-in current transformer; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/150-501">www.wago.com/855-301/150-501</a>
	<p><b>Item no.: 855-301/200-501</b> Plug-in current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/200-501">www.wago.com/855-301/200-501</a>
	<p><b>Item no.: 855-301/250-501</b> Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/250-501">www.wago.com/855-301/250-501</a>
	<p><b>Item no.: 855-301/400-1001</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/400-1001">www.wago.com/855-301/400-1001</a>
	<p><b>Item no.: 855-301/600-1001</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1</p>	<a href="http://www.wago.com/855-301/600-1001">www.wago.com/855-301/600-1001</a>
	<p><b>Item no.: 855-305/050-103</b> Plug-in current transformer; Primary rated current: 50 A; Secondary rated current: 5 A; Rated power: 1.25 VA; Accuracy class: 3</p>	<a href="http://www.wago.com/855-305/050-103">www.wago.com/855-305/050-103</a>














**Item no.: 855-305/060-101**

Subject to changes. Please also observe the further product documentation!
















	Plug-in current transformer; Primary rated current: 60 A; Secondary rated current: 5 A; Rated power: 1.25 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/060-101">www.wago.com/855-305/060-101</a>
	<b>Item no.: 855-305/075-201</b> Plug-in current transformer; Primary rated current: 75 A; Secondary rated current: 5 A; Rated power: 2.5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/075-201">www.wago.com/855-305/075-201</a>
	<b>Item no.: 855-305/100-201</b> Plug-in current transformer; Primary rated current: 100 A; Secondary rated current: 5 A; Rated power: 2.5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/100-201">www.wago.com/855-305/100-201</a>
	<b>Item no.: 855-305/150-501</b> Plug-in current transformer; Primary rated current: 150 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/150-501">www.wago.com/855-305/150-501</a>
	<b>Item no.: 855-305/200-501</b> Plug-in current transformer; Primary rated current: 200 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/200-501">www.wago.com/855-305/200-501</a>
	<b>Item no.: 855-305/250-501</b> Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/250-501">www.wago.com/855-305/250-501</a>
	<b>Item no.: 855-305/300-501</b> Plug-in current transformer; Primary rated current 300 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/300-501">www.wago.com/855-305/300-501</a>
	<b>Item no.: 855-305/400-1001</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/400-1001">www.wago.com/855-305/400-1001</a>
	<b>Item no.: 855-305/600-1001</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-305/600-1001">www.wago.com/855-305/600-1001</a>
	<b>Item no.: 855-4001/100-001</b> Split-core current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4001/100-001">www.wago.com/855-4001/100-001</a>
	<b>Item no.: 855-4001/150-001</b> Split-core current transformer; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4001/150-001">www.wago.com/855-4001/150-001</a>
	<b>Item no.: 855-4001/200-001</b> Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; Cable length: 3 m	<a href="http://www.wago.com/855-4001/200-001">www.wago.com/855-4001/200-001</a>
	<b>Item no.: 855-4005/150-101</b> Split-core current transformer; Primary rated current: 150 A; Secondary rated current: 5 A; Rated power: 1 VA; Accuracy class: 1; Cable length: 0.5 m	<a href="http://www.wago.com/855-4005/150-101">www.wago.com/855-4005/150-101</a>
	<b>Item no.: 855-401/250-501</b>	

Subject to changes. Please also observe the further product documentation!

	Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/250-501">www.wago.com/855-401/250-501</a>
	<b>Item no.: 855-401/400-501</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/400-501">www.wago.com/855-401/400-501</a>
	<b>Item no.: 855-401/600-501</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/600-501">www.wago.com/855-401/600-501</a>
	<b>Item no.: 855-405/250-501</b> Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-405/250-501">www.wago.com/855-405/250-501</a>
	<b>Item no.: 855-405/400-501</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-405/400-501">www.wago.com/855-405/400-501</a>
	<b>Item no.: 855-405/750-501</b> Plug-in current transformer; Primary rated current 750 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-405/750-501">www.wago.com/855-405/750-501</a>
	<b>Item no.: 855-4101/200-001</b> Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/200-001">www.wago.com/855-4101/200-001</a>
	<b>Item no.: 855-4101/250-001</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/250-001">www.wago.com/855-4101/250-001</a>
	<b>Item no.: 855-4101/400-001</b> Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/400-001">www.wago.com/855-4101/400-001</a>
	<b>Item no.: 855-4105/250-101</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 5 A; Rated power: 1 VA; Accuracy class: 1; Cable length: 0.5 m	<a href="http://www.wago.com/855-4105/250-101">www.wago.com/855-4105/250-101</a>
	<b>Item no.: 855-4105/400-101</b> Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 5 A; Rated power: 1 VA; Accuracy class: 1; Cable length: 0.5 m	<a href="http://www.wago.com/855-4105/400-101">www.wago.com/855-4105/400-101</a>
	<b>Item no.: 855-5001/1000-000</b> Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/1000-000">www.wago.com/855-5001/1000-000</a>
	<b>Item no.: 855-5001/250-001</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 1; Cable length: 5 m	<a href="http://www.wago.com/855-5001/250-001">www.wago.com/855-5001/250-001</a>
	<b>Item no.: 855-5001/400-000</b>	








Subject to changes. Please also observe the further product documentation!






	Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/400-000">www.wago.com/855-5001/400-000</a>
	<b>Item no.: 855-5001/600-000</b> Split-core current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/600-000">www.wago.com/855-5001/600-000</a>
	<b>Item no.: 855-5005/1000-000</b> Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 5 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 3 m	<a href="http://www.wago.com/855-5005/1000-000">www.wago.com/855-5005/1000-000</a>
	<b>Item no.: 855-5005/400-001</b> Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 5 A; Rated power: 0.5 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-5005/400-001">www.wago.com/855-5005/400-001</a>
	<b>Item no.: 855-5005/600-000</b> Split-core current transformer; Primary rated current: 600 A; Secondary rated current: 5 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 3 m	<a href="http://www.wago.com/855-5005/600-000">www.wago.com/855-5005/600-000</a>
	<b>Item no.: 855-501/1000-1001</b> Plug-in current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/1000-1001">www.wago.com/855-501/1000-1001</a>
	<b>Item no.: 855-501/400-1001</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/400-1001">www.wago.com/855-501/400-1001</a>
	<b>Item no.: 855-501/600-1001</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/600-1001">www.wago.com/855-501/600-1001</a>
	<b>Item no.: 855-501/800-1001</b> Plug-in current transformer; Primary rated current: 800 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/800-1001">www.wago.com/855-501/800-1001</a>
	<b>Item no.: 855-505/1000-1001</b> Plug-in current transformer; Primary rated current: 1000 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-505/1000-1001">www.wago.com/855-505/1000-1001</a>
	<b>Item no.: 855-505/400-1001</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-505/400-1001">www.wago.com/855-505/400-1001</a>
	<b>Item no.: 855-505/600-1001</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-505/600-1001">www.wago.com/855-505/600-1001</a>
	<b>Item no.: 855-505/800-1001</b> Plug-in current transformer; Primary rated current: 800 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-505/800-1001">www.wago.com/855-505/800-1001</a>

**Item no.: 855-5101/1000-000**




Subject to changes. Please also observe the further product documentation!

	Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5101/1000-000">www.wago.com/855-5101/1000-000</a>
	<b>Item no.: 855-5105/1000-000</b> Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 5 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 3 m	<a href="http://www.wago.com/855-5105/1000-000">www.wago.com/855-5105/1000-000</a>
	<b>Item no.: 855-601/1500-501</b> Plug-in current transformer; Primary rated current: 1500 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-601/1500-501">www.wago.com/855-601/1500-501</a>
	<b>Item no.: 855-605/1500-501</b> Plug-in current transformer; Primary rated current: 1500 A; Secondary rated current: 5 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-605/1500-501">www.wago.com/855-605/1500-501</a>
	<b>Item no.: 855-801/1000-1001</b> Plug-in current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-801/1000-1001">www.wago.com/855-801/1000-1001</a>
	<b>Item no.: 855-801/2000-1001</b> Plug-in current transformer; Primary rated current: 2000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-801/2000-1001">www.wago.com/855-801/2000-1001</a>
	<b>Item no.: 855-805/2000-1001</b> Plug-in current transformer; Primary rated current: 2000 A; Secondary rated current: 5 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-805/2000-1001">www.wago.com/855-805/2000-1001</a>

**potential distribution**

	<b>Item no.: 855-1851/350-000</b> Current and voltage tap up to 185 mm <sup>2</sup> ; Primary rated current: 350 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-1851/350-000">www.wago.com/855-1851/350-000</a>
	<b>Item no.: 855-501/150-000</b> Current and voltage tap up to 50 mm <sup>2</sup> ; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-501/150-000">www.wago.com/855-501/150-000</a>
	<b>Item no.: 855-951/250-000</b> Current and voltage tap up to 95 mm <sup>2</sup> ; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-951/250-000">www.wago.com/855-951/250-000</a>

**assembling**

	<b>Item no.: 249-116</b> Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	<a href="http://www.wago.com/249-116">www.wago.com/249-116</a>
	<b>Item no.: 249-117</b> Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	<a href="http://www.wago.com/249-117">www.wago.com/249-117</a>
	<b>Item no.: 249-197</b> Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	<a href="http://www.wago.com/249-197">www.wago.com/249-197</a>

Subject to changes. Please also observe the further product documentation!



## Downloads

### Documentation

#### Instruction Leaflet

Strommessumformer	V 1.0.0 3. 4. 2020	pdf 1.8 MB	Download
-------------------	-----------------------	---------------	----------

#### Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

## Engineering-Software

### Software for Interface-Products

WAGO Interface Configuration Software G2 SMALL The full setup only includes the WAGO Interface Configuration Software G2.	1.0.5.03 14. 9. 2020	exe 29.8 MB	Download
--	-------------------------	----------------	----------

WAGO Interface Configuration Software G2 FULL The full setup, in addition to the WAGO Interface Configuration Software G2, includes the installation for the Microsoft .NET Framework.	1.0.5.03 14. 9. 2020	exe 113.7 MB	Download
---	-------------------------	-----------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 857-551		URL	Download
----------------------	--	-----	----------

### CAE data

ZUKEN Portal 857-551		URL	Download
----------------------	--	-----	----------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 857-551 Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width		URL	Download
--	--	-----	----------


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
We are always happy to take your call at 01788 568 008.

## Installation Notes

### Configuration

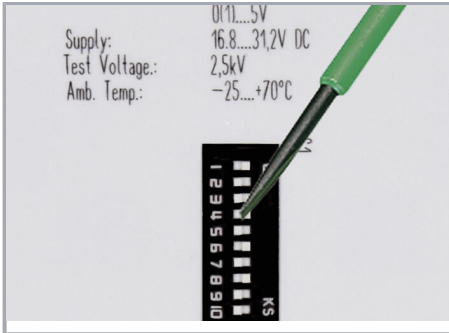


Configuration via DIP switch

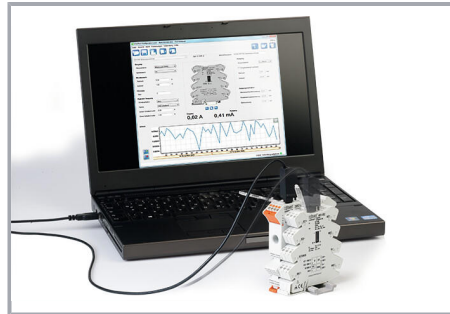

Configuration via WAGO interface configuration software

### Commoning

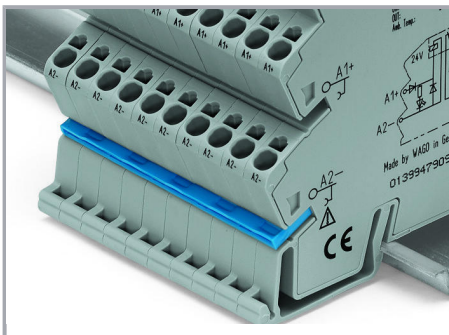

Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at 01788 568 008.