




SGX

SENSORTECH

An Amphenol Company

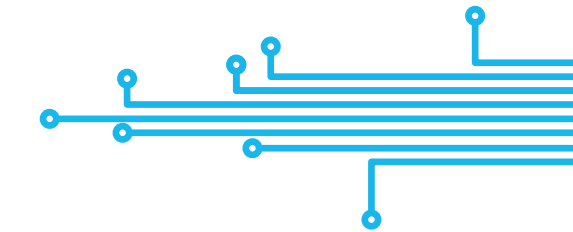

PS1-CO-10-MOD

PS1-CO-10-I2S-MOD

Carbon Monoxide Module Datasheet

Small size | Low cost | Long life | Fast response | High accuracy | Low power consumption



Quality, Safety, Responsibility


Product note

The PS1 series CO gas module is the perfect combination of our sensor with an advanced printed circuit board. SGX Sensortech gas sensors are using a revolutionary 'Solid Polymer Electrolyte' technology that is based on the principle of electrochemical reaction. The target gas to be measured generates a very small current, proportional to the gas concentration. Our technology offers a stable, high quality and cost-effective manufacturing process.

The module is equipped with a standard UART digital output, allowing operation by anyone without knowledge or understanding of the sensor application and the tedious work of calibration.

Features

- High accuracy and long life
- Fast response speed, fast return to zero, plug and play
- Good anti-toxicity
- Easy to use, UART digital signal output
- Excellent accuracy, repeatability, linearity and consistency
- Zero drift
- Strong anti-electromagnetic interference
- Mounting holes for easy installation
- Sleep function for low power applications
- Independent temperature and humidity digital sensor output
- RoHS compliant

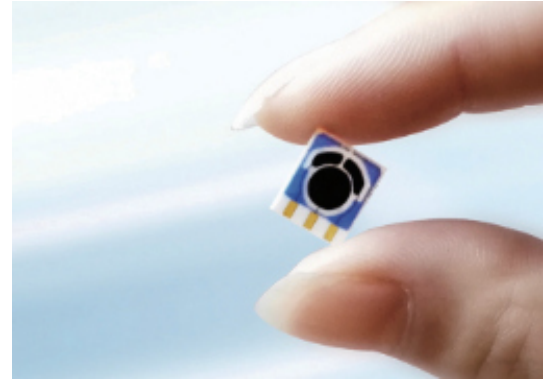



Application

- Indoor gas monitoring
- Air purifier
- Air Pollution Monitoring in Commercial Places
- Indoor temperature and humidity monitor
- Air monitoring in public transport spaces
- HVAC systems
- Laboratory fume hood system
- Laboratory environment monitoring
- Ambient air quality monitoring




Functional specifications

Gas Sensor Specifications	
Principle	Solid Polymer Electrochemical Sensing Technology
Detection Gas	Carbon Monoxide Gas
Response Time	< 3 seconds (T50: < 10 seconds; T90: < 30 seconds)
Accuracy	< 5% F.S
Repeatability	Full range \pm 1% is the normal range
Linearity	Linear
Long-Term Drift	< 1% / month
Expected Lifetime	> 5 years
Temperature & Relative Humidity Sensor Specification	
Temperature Range	-20°C to +70°C
Temperature Accuracy	\pm 0.2°C (Typical Value)
Humidity Range	0 to 100% RH
Humidity Accuracy	\pm 2% (Typical Value)
Environment Specifications	
Working Temperature	-40°C to +55°C
Working Humidity	15% - 95% RH. (Non-condensing)
Working Pressure	Atmospheric pressure \pm 10%

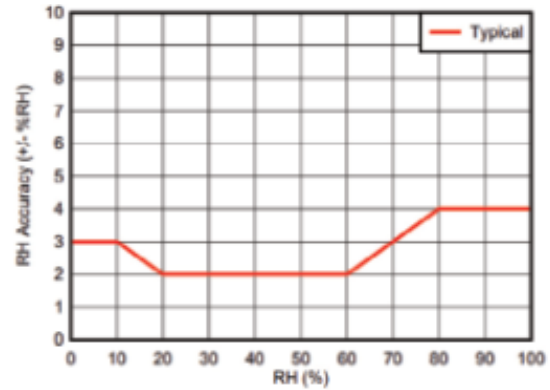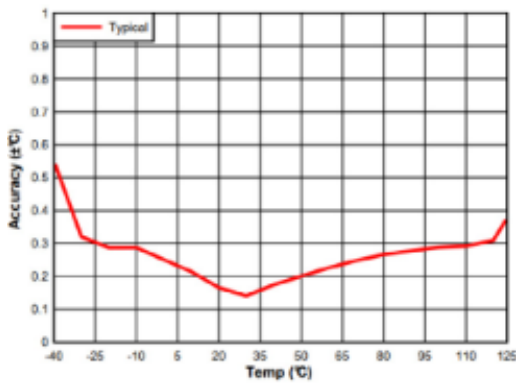


Mechanical Specifications	
Size (Including gas sensor)	23 x 25.5 x 10.2mm
Size (Without gas sensor)	23 x 25.5 x 4.85mm
Weight	3.1 g
Signal Cable	The standard length is shown in the structure diagram and can be customized if there are special requirements.
Electrical Specifications	
Output Signal	UART TTL 3.3V or I2C digital signal, for more information please see "Communication Protocol"
	UART Interface definition: VCC- red, GND- black, RX- yellow, TX- green
	UART Baud rate: 9600 Data bits: 8 bits Stop bits: 1 bit
	I2C Interface definition: VCC-red, GND-black, SDA-yellow, SCL-green I2C Frequency: \leq 20kHz I2C Signal Voltage: 3.3V

UART TTL 3.3V

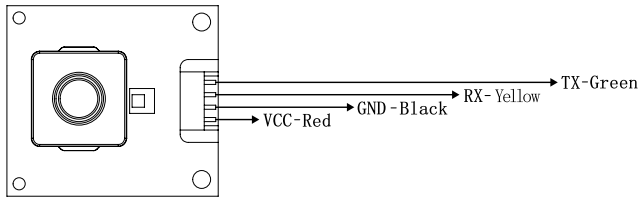


I²C 3.3V


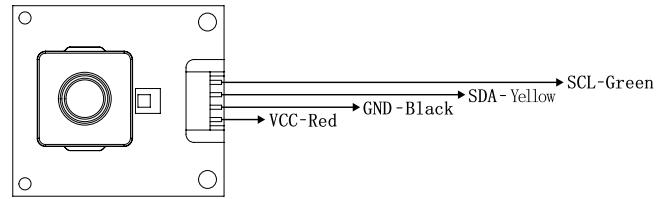


Get Data Command	Communication has active upload and Q&A mode. The default mode is Q&A mode after power-on. You can use instructions to switch between the two modes. Note: If you switch off the module or switch to sleep mode, the module remains in Q&A mode.
Supply Voltage	3.3 to 5.5V DC, Recommended 5V DC
Supply Current	9.5mA @ 5VDC
Current (Switch off LED lamp)	8.7mA @ 5VDC
Peak Current	11mA @ 5V DC
Sleep Mode Current	0.85mA @ 5V DC
Power Consumption	40mW @ 5V DC
Working Current	< 5mA
Sleep Mode Power Consumption	25mW @ 5V DC

PS1-CO-10-MOD Dimensions (mm)

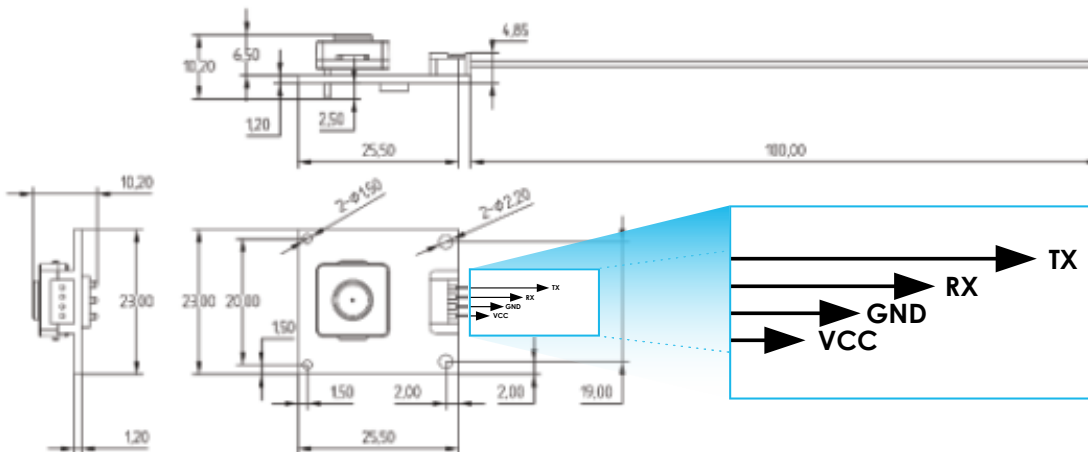


MOD-4Pin-Cable Dimensions (mm)

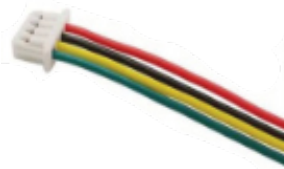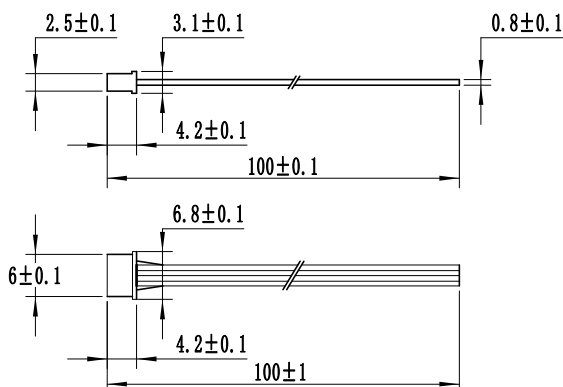

Cable color	Signal
Red	VCC
Black	GND
Yellow	RX
Green	TX

EK6-PSX

Evaluation Kit

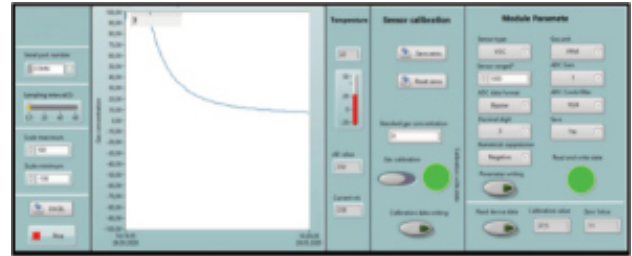

The main purpose of the Evaluation Kit is to install software that allows the user to read data from SGX Sensortech sensor module boards.

We offer an Evaluation Kit for all of our sensor modules. The Evaluation Kit includes a USB UART interface and comes with a USB to TTL adapter and cable. In addition, the kit includes easy-to-use testing software that can be installed on any PC, allowing you to test and equally get familiar with our product.

The software displays data from the sensor modules and can be exported. Therefore, it can only read data from the sensor module and cannot write data to it. All of the SGX Sensortech products are delivered factory calibrated.

Certifications

- ROHS Certification No.A2230090158101001

Order Information

Product	Partnumber	Range	Resolution	Output
Nitrogen Dioxide Gas Sensor Module	PS1-CO-10-MOD	0 - 10 ppm	0.01 ppm	UART TTL 3.3V
	PS1-CO-10-I2S-MOD	0 - 10 ppm	0.01 ppm	I ² C
Evaluation Kit	EK6-PSX			

DISCLAIMER:

SGX Europe Sp. z o.o. reserves the right to change design features and specifications without prior notification. We do not accept any legal responsibility for customer applications of our sensors. SGX Europe Sp. z o.o. accepts no liability for any consequential losses, injury or damage resulting from the use of this document, the information contained within or from any omissions or errors herein. This document does not constitute an offer for sale and the data contained is for guidance only and may not be taken as warranty. Any use of the given data must be assessed and determined by the user thereof to be in accordance with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

SGX Europe Sp. z o.o. sensors are designed to operate in a wide range of harsh environments and conditions. However, it is important that exposure to high concentrations of solvent vapours is to be avoided, both during storage, fitting into instruments and operation. When using sensors on printed circuit boards (PCBs), degreasing agents should be used prior to the sensor being fitted. SGX Europe Sp. z o.o. makes every effort to ensure the reliability of its products. Where life safety is a performance requirement of the product, we recommend that all sensors and instruments using these sensors are checked for response to gas before use.

Copyright© 2012-2024 SGX Sensortech All rights reserved.

Trademarks and registered trademarks are the property of their respective owners.

No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.

For permission requests or technical support please contact or write to the publisher, addressed "Attention: Permissions Coordinator."