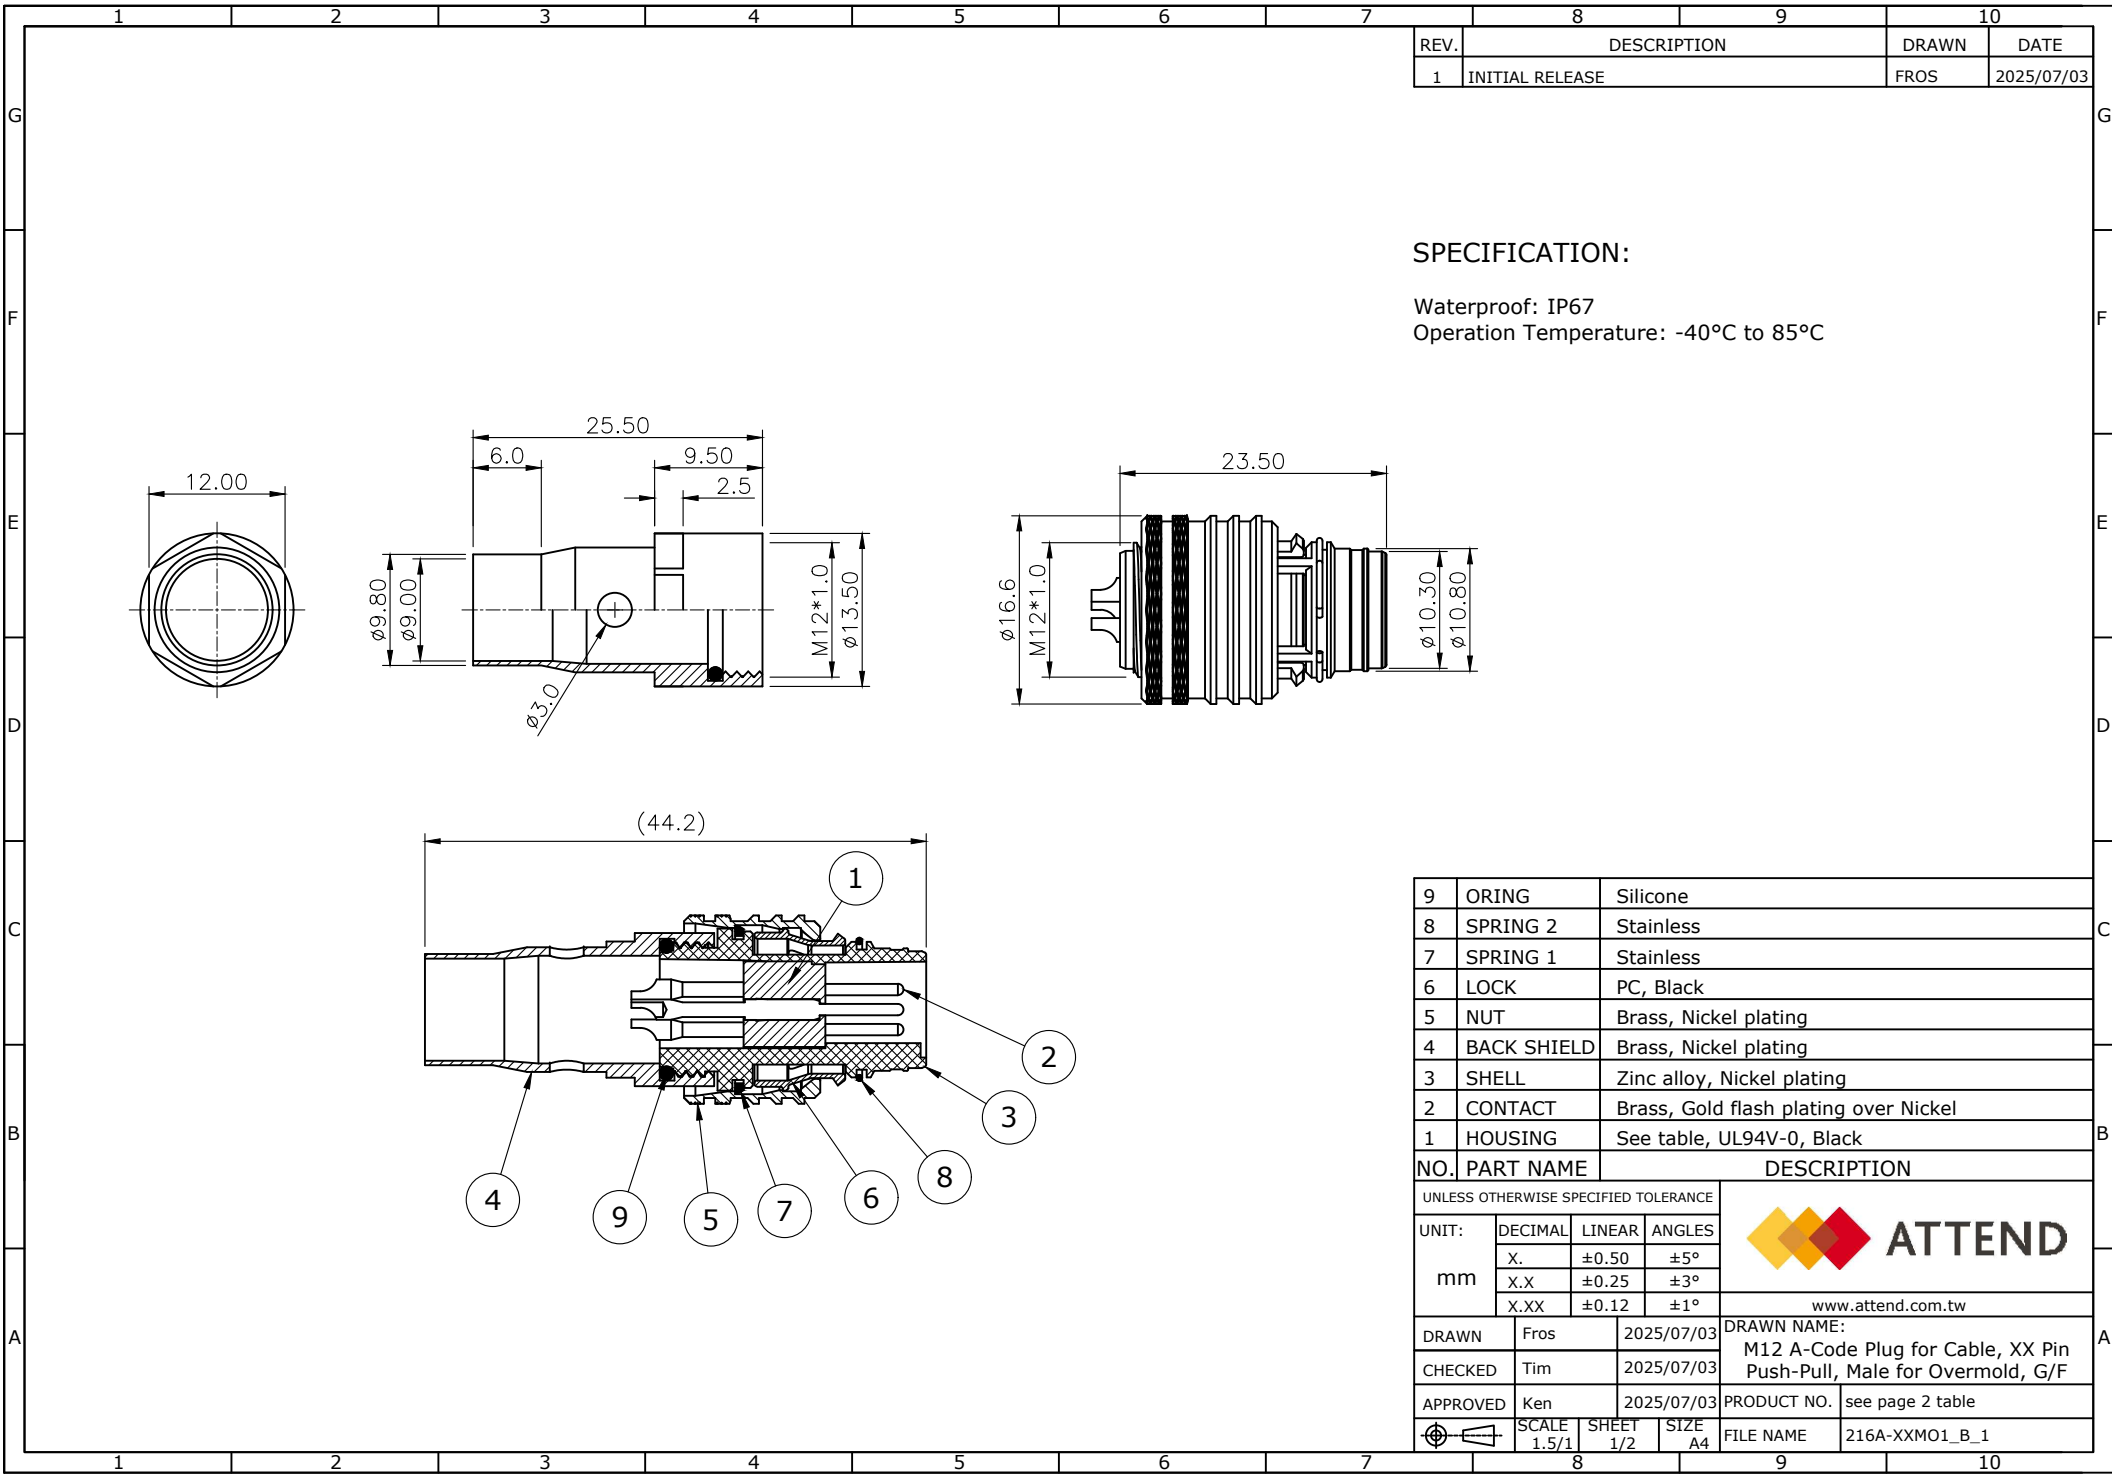








REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/07/03

SPECIFICATION:

Waterproof: IP67
Operation Temperature: -40°C to 85°C

9	ORING	Silicone
8	SPRING 2	Stainless
7	SPRING 1	Stainless
6	LOCK	PC, Black
5	NUT	Brass, Nickel plating
4	BACK SHIELD	Brass, Nickel plating
3	SHELL	Zinc alloy, Nickel plating
2	CONTACT	Brass, Gold flash plating over Nickel
1	HOUSING	See table, UL94V-0, Black

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm		www.attend.com.tw	
DRAWN	Fros	2025/07/03	DRAWN NAME:
CHECKED	Tim	2025/07/03	M12 A-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F
APPROVED	Ken	2025/07/03	PRODUCT NO. see page 2 table
SCALE	1.5/1	SHEET 1/2	FILE NAME 216A-XXM01_B_1

							REV.	DESCRIPTION		DRAWN	DATE
TABLE											
											
<u>216A-04MO1</u> 250V/4A PA UL94V-0			<u>216A-05MO1</u> 60V/4A PA UL94V-0								
											
<u>216A-08MO1</u> 30V/2A PA UL94V-0											
											
<u>216A-12MO1</u> 30V/1.5A PA UL94V-0											
UNLESS OTHERWISE SPECIFIED TOLERANCE											
UNIT:		DECIMAL	LINEAR	ANGLES	www.attend.com.tw DRAWN NAME: M12 A-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F						
mm		X.	±0.50	±5°							
		X.X	±0.25	±3°							
		X.XX	±0.12	±1°							
DRAWN		Fros		2025/07/03		PRODUCT NO.			see table		
CHECKED		Tim		2025/07/03		FILE NAME			216A-XXMO1_B_1		
APPROVED		Ken		2025/07/03		SCALE		SHEET		SIZE	
		1.5/1		2/2		A4					