

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 1-1564532-1 Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series

View on TE.com >





Connector System: Wire-to-Wire Number of Positions: 15 Connector & Housing Type: Housing for Male Terminals Centerline (Pitch): 4 mm, 6 mm [.157 in, .236 in] Sealable: Yes

All Heavy Duty Sealed Connector Series Housings (204)

Features

Product Type Features

Mixed & Hybrid Connector



Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	15
Number of Rows	2
Electrical Characteristics	
Operating Voltage	60 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 60 V
Body Features	
Cable Exit Angle	180°, 90°
Primary Product Color	Black
Connector & Keying Code	A

& For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Contact Features

Contact Size	1.6mm, 2.8mm		
Contact Type	Tab		
Mating Tab Width	1.6 mm, 2.8 mm[.063 in][.11 in]		
Contact Current Rating (Max)	40 A		
Mechanical Attachment			
Terminal Position Assurance	Yes		
Strain Relief	Without		
Mating Alignment Type	Keyed		
Mating Alignment	With		
Connector Mounting Type	Panel Mount		
Housing Features			
Housing Material	PBT GF		
Centerline (Pitch)	4 mm, 6 mm[.157 in][.236 in]		
Dimensions			
Connector Height	48.1 mm[1.894 in]		
Product Width	39.8 mm[1.567 in]		
Product Length	62.5 mm[2.461 in]		
Row-to-Row Spacing	6.2 mm, 6.8 mm[.244 in][.268 in]		
Usage Conditions			
Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]		
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]		
Operation/Application			
Circuit Application	Signal		
Industry Standards			
Degree of Protection	IP67		
UL Flammability Rating	UL 94V-0		
Packaging Features			
Packaging Quantity	80		

Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Other

Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge


based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



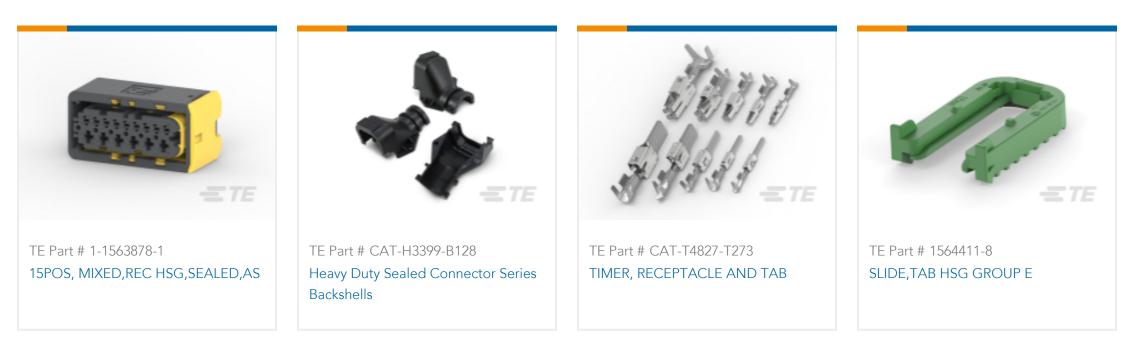




Also in the Series | Heavy Duty Sealed Connector Series










Data Connectivity Headers(2)

Automotive	Connector	Caps a	COVCIS	
(25)				

Automotive Housings(207)

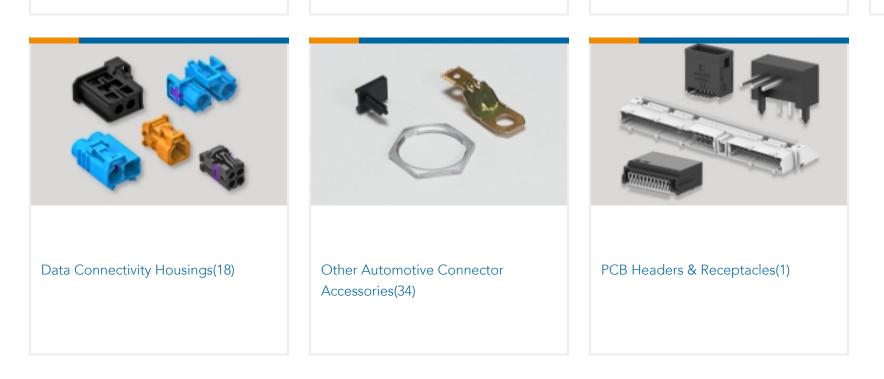

Customers Also Bought



Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series







Documents

Product Drawings 15POS, MIXED, TAB HSG, ASSY

English

CAD Files Customer View Model ENG_CVM_CVM_1-1564532-1_J.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1564532-1_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1564532-1_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages HDSCS Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

S For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 15 Position, .157 in / .236 in [4 mm / 6 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Application Specification

English

Product Environmental Compliance Product Compliance English

Product Compliance

English