

TECHNICAL CHARACTERISTICS



MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 500 MATING CYCLES

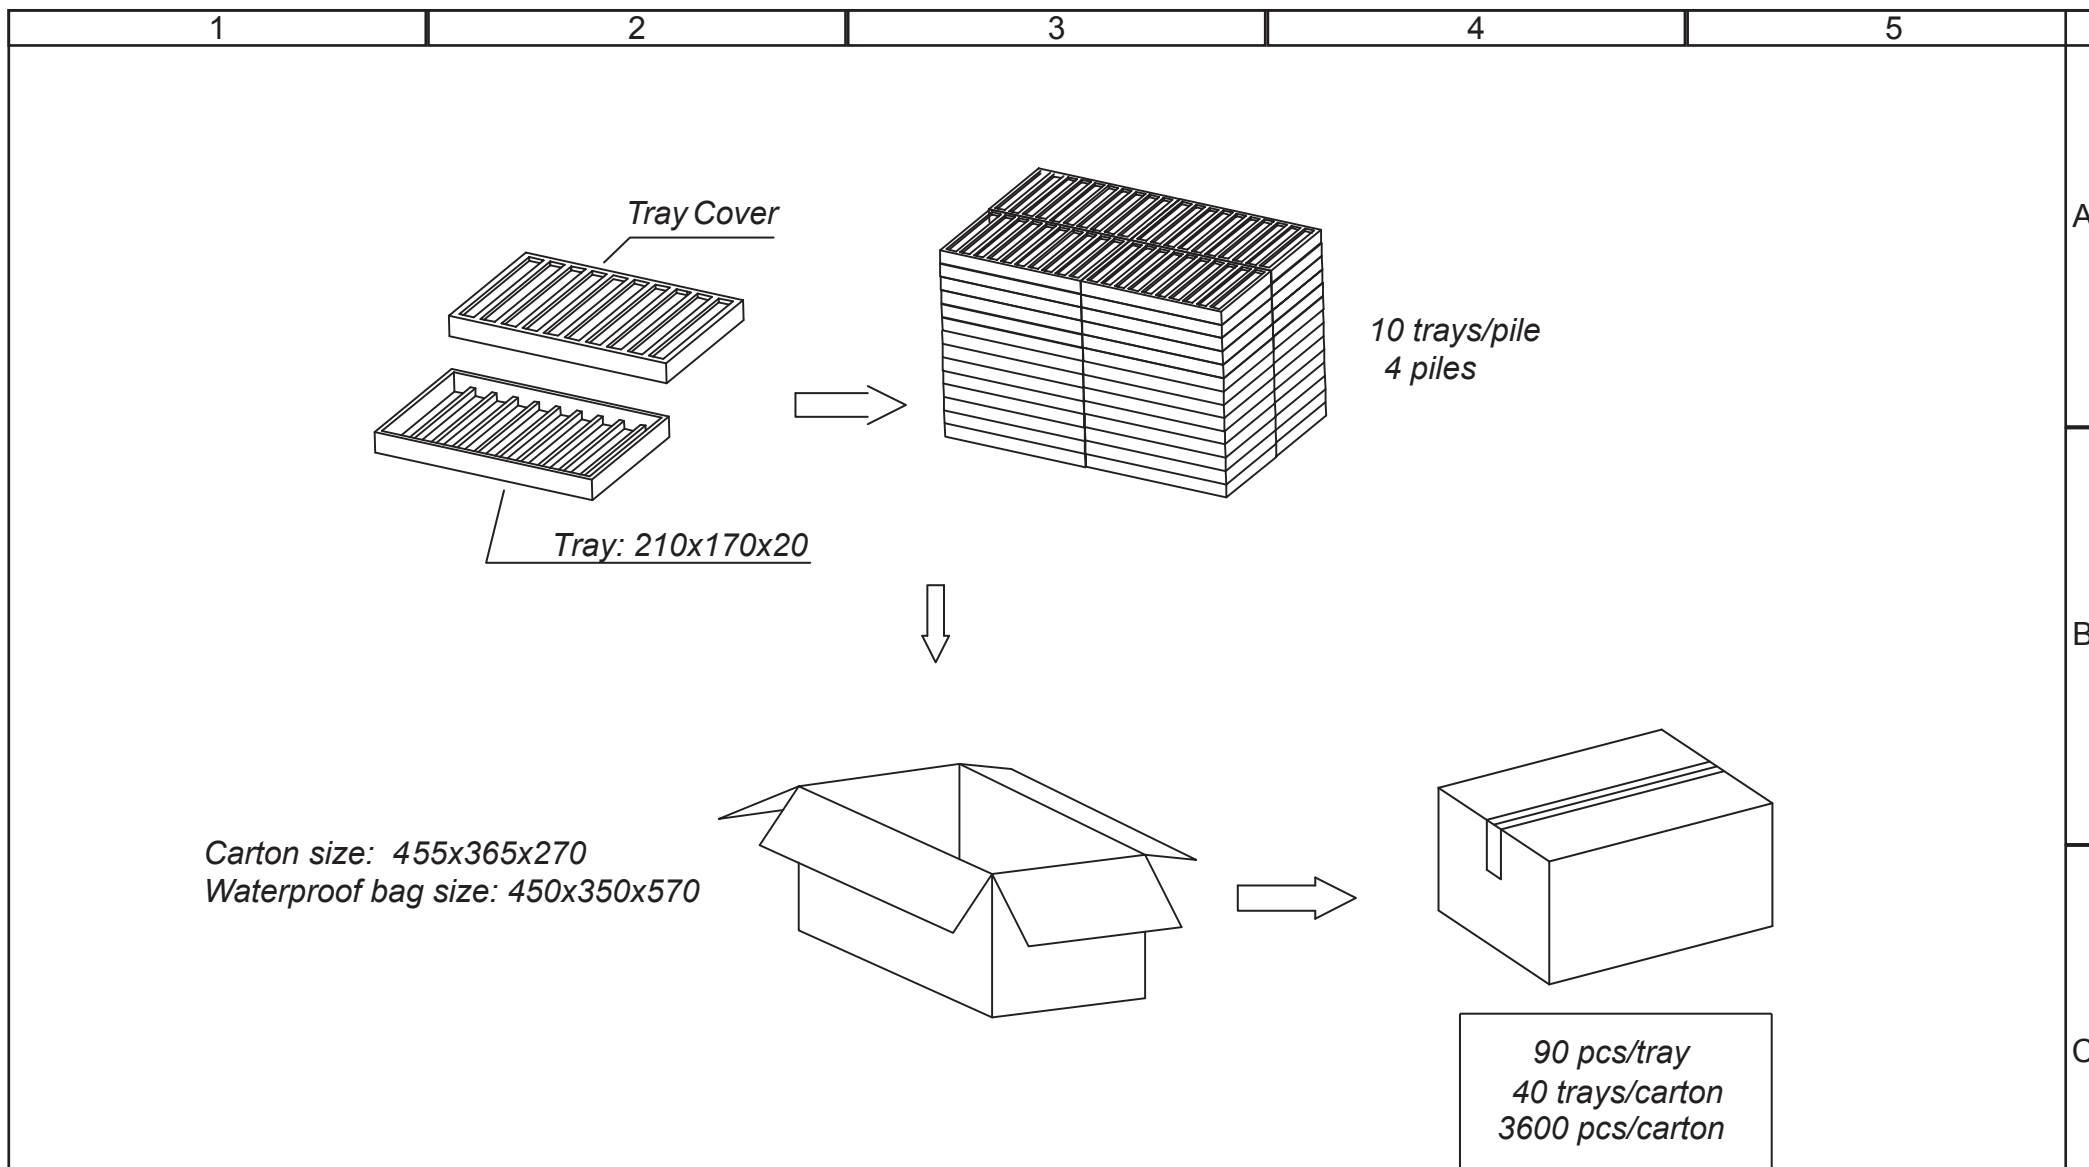
ENVIRONMENTAL
OPERATING TEMPERATURE: -40 °C UP TO +85 °C
COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 mΩ MAX

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.3 .XX = +/- 0.20			<div>DESCRIPTION: HORIZONTAL PLASTIC MODULAR JACK 8P8C TAB UP</div> <div>WERI PART NO: 615 008 148 521</div>	<div>SIZE</div> <div>A4</div>	D
G										
F										
E										
D										
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC MODULAR JACK 8P8C TAB UP		WERI PART NO: 615 008 148 521	SIZE	A4
B					SCALE:					
A	23-JUL-14	PDF	AS		SHEET: 1/1					
REV	DATE	FILE	BY		DRAW: AS					



RoHS Compliant								
G				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = \pm 0.2</div> <div>.XX = \pm 0.15</div>	<div></div> <div>WÜRTH ELEKTRONIK</div>		
F								
E								
D								
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC MODULAR JACK 8P8C TAB UP		SIZE
B					SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 1/1	WERI PART NO: 615 008 148 521		
REV	DATE	FILE	BY		DRAW: AS			