


Item no.: 250-506
 Product description: 1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER
 PIN/POLE IN LINE 6 POLE PIN SPACING 5 MM / 0.197 IN
 WITH PUSH BUTTONS WITH TEST SLOT FOR Ø

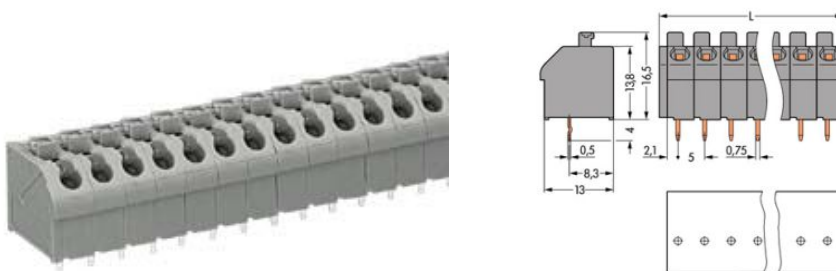

Produkt kann von Bild abweichen / product may differ

Packing unit 140 4*35 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	5.801 g
Color	gray
No. of connection Points	6
No. of potentials	6
pole count	6
Height	16.5 mm
Height	0.65 in
Width	31.5 mm
Width	1.24 in
Depth	13 mm
Depth	0.512 in
Pin spacing from	5 mm
Pin spacing from	0.197 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	17.5 A

Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	17.5 A



Cross section [mm ²]	0.5 - 1.5 mm ²
Wiring method	solid
Cross section [mm ²]	0.75 - 1.5 mm ²
Wiring method	fine-stranded
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule and plastic collar)
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule, without plastic collar)
Cross section [AWG]	20 - 14 AWG
Strip length from	9 mm
Strip length to	10 mm
Material group	I
Contact material	Electrolytic copper (Ecu)
Contact surface	tin-plated
xxx-xxx/000-002	yellow
xxx-xxx/000-005	red
xxx-xxx/000-006	blue
xxx-xxx/000-009	light gray
xxx-xxx/000-012	orange
xxx-xxx/000-014	brown
xxx-xxx/000-017	light green
xxx-xxx/000-050	white



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
250-506	CCA	NL6336	800	17,5	0,2-1,5
250-506	KEMA	2114919.01	400	17,5	0,2-1,5
250-506	UR	E45172	300	2	20-16

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected