

## Adapter Han RJ45 module / RJ45 plug

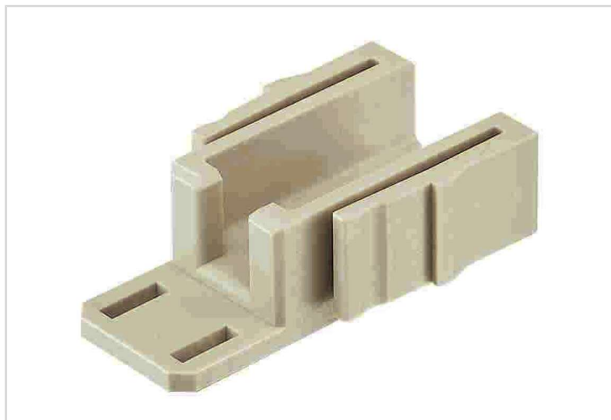


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 14 000 9967                                                                |
| Specification      | Adapter Han RJ45 module / RJ45 plug                                           |
| HARTING eCatalogue | <a href="https://harting.com/09140009967">https://harting.com/09140009967</a> |

### Identification

|                           |                  |
|---------------------------|------------------|
| Category                  | Modules          |
| Series                    | Han-Modular®     |
| Type of module            | Han® RJ45 module |
| Size of the module        | Single module    |
| Description of the module | Adapter          |

### Version

|        |      |
|--------|------|
| Gender | Male |
|--------|------|

### Technical characteristics

|                          |                   |
|--------------------------|-------------------|
| Rated current            | 1 A               |
| Rated voltage            | 50 V              |
| Rated impulse voltage    | 0.8 kV            |
| Pollution degree         | 3                 |
| Rated voltage acc. to UL | 30 V              |
| Insulation resistance    | $>10^{10} \Omega$ |
| Limiting temperature     | -40 ... +70 °C    |
| Mating cycles            | $\geq 500$        |

### Material properties

|                                           |                        |
|-------------------------------------------|------------------------|
| Material (insert)                         | Polycarbonate (PC)     |
| Colour (insert)                           | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0                    |



**Pushing Performance**  
Since 1945

## Material properties

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| RoHS                                | compliant                           |
| ELV status                          | compliant                           |
| China RoHS                          | e                                   |
| REACH Annex XVII substances         | Not contained                       |
| REACH ANNEX XIV substances          | Not contained                       |
| REACH SVHC substances               | Not contained                       |
| Fire protection on railway vehicles | EN 45545-2 (2020-08) + A1 (2023-10) |
| Requirement set with Hazard Levels  | R22 (HL 1-3)                        |
|                                     | R23 (HL 1-3)                        |

## Specifications and approvals

|                |             |
|----------------|-------------|
| Specifications | IEC 60664-1 |
|                | IEC 61984   |
| Approvals      | DNV GL      |

## Commercial data

|                                |                                                                    |
|--------------------------------|--------------------------------------------------------------------|
| Packaging size                 | 2                                                                  |
| Net weight                     | 6 g                                                                |
| Country of origin              | Germany                                                            |
| European customs tariff number | 85389099                                                           |
| GTIN                           | 5713140018877                                                      |
| eCl@ss                         | 27440207 Adapter for industrial connectors (module/contact insert) |
| ETIM                           | EC002312                                                           |
| UNSPSC 24.0                    | 39121469                                                           |