



## Connecting cable; Plug - free end; 3-pole; Coding A; 1 m long; halogen-free

Item No.: 771-9993/216-102



Connecting cable; Plug - free end; 3-pole; Coding A; 1 m long; halogen-free

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	771-9993/216-102
GTIN / EAN	4044918273053
Content	1
Order amount	1
Customer item number	

### Notes

All WINSTA® components are 100% protected against mismatching in terms of: a.) plugging different number of poles b.) plugging when turned by 180° c.) plugging when laterally staggered d.) plugging one pole  
Note on Continuous Service Temperature: -35°C ... +85°C  
PVC cable for temperatures 70 °C (including halogen-free)  
Insulating parts for temperatures 105 °C

### Technical data

#### Miscellaneous


Packaging type	not packed
Rated voltage (III / 3) [V]	250 [V]

<b>Technical data</b>	
<i>Rated impulse voltage (III / 3) [kV]</i>	4 [kV]
<i>Rated current [A]</i>	16 [A]
<i>Legend (ratings)</i>	(III / 3) Overvoltage category III / Pollution degree 3
<i>Total number of potentials</i>	3
<i>Strip length</i>	9 mm / 0.35 Inch
<i>Durchmesser der Mantelleitung</i>	7.4 ... 9.4 mm
<i>Pin spacing</i>	10 mm (0.394 in)
<i>Total length [m]</i>	1 [m]
<i>Coding</i>	A
<i>No. of poles</i>	3
<i>Mating force of a plug-in connection</i>	approx. 20 ... 70 N (depending on pole number)
<i>Retention force of a plug-in connection</i>	when locked: > 80N
<i>Unmating force of a plug-in connection</i>	when unlocked: approx. 20 ... 70 N (depending on pole number)
<i>Connection type cable/adapter 1 1</i>	Plug
<i>Connection type cable/adapter 1 2</i>	free end
<i>Leitungstyp</i>	Connecting cable
<i>Mismating protection</i>	1
<i>Marking</i>	L &#9178; N
<i>Potential marking</i>	L &#9178; N
<i>Color</i>	white
<i>Insulating material</i>	Polyamide 66 (PA 66)
<i>Flammability class per UL94</i>	V0
<i>Reaction to fire class</i>	Eca
<i>Contact material</i>	Copper or copper alloy, surface-treated
<i>Fire load [MJ]</i>	1.876 [MJ]
<i>RoHS Conformity</i>	1
<i>Connector color</i>	white
<i>Printing color of mating face</i>	black
<i>Strain relief color</i>	white
<i>Printing color of strain relief</i>	black
<i>Color of sheathed cable</i>	white
<i>Printing color of sheathed cable</i>	black
<i>Halogen-free</i>	1

### Technical data

<i>Weight [g]</i>	105.896 [g]
<i>Ambient temperature (operation)</i>	-35 ... 85 °C
<i>Processing temperature</i>	-5°C ... +40°C

### Images & drawings

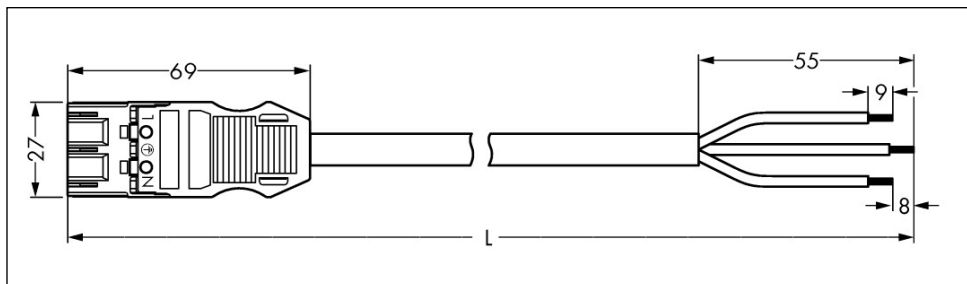

### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.