© THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

CONFIDENTIAL

VERTRAULICH

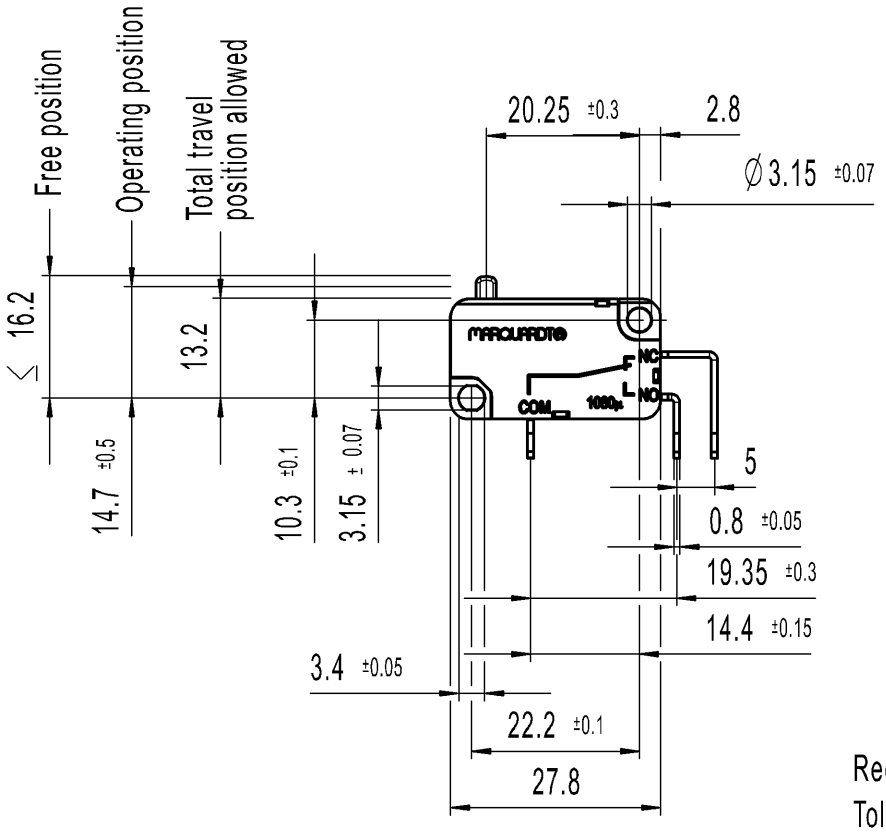

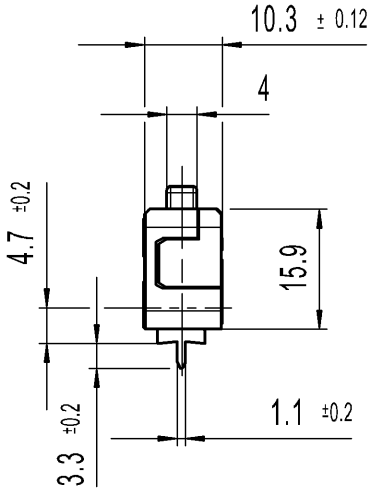



Recommended hole pattern, side of component
Tolerances acoording to
DIN IEC 326 Item 3 very fine

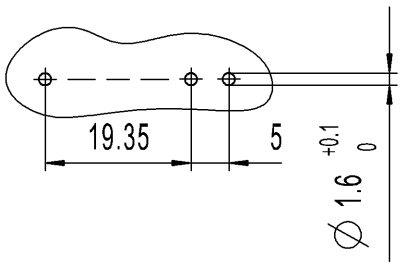

Marking:

MARQUARDT

1080µ 40T125
16(4) /250 ~ 25E3
16(8) /250 ~ 10E3 10

16 A 125 AC 1/2 HP
16 A 250 AC 1/2 HP
R109

Data code of manufacture:
place / year / week

On packaging : D54P30001





Single pole changeover

Actuating force	≤ 1.0 N
Release force	≥ 0.3 N
Movement differential	≤ 0.3 mm
Protection class	IP 40

Figure	Type	Customer No.	Art.No.-PI
-	-	D54P30001	1080.0304-XX

General tolerances

All dimensions are in millimetres	Shape and location	Angle	Edge tolerance	Length	Radii
	◎ ⫽	± 2 °		0-6: ± 0.1	± 0.2
				>6-15: ± 0.15	± 0.3
				>15-30: ± 0.2	± 0.5
				>30-70: ± 0.3	± 10%
				>70-120: ± 0.4	
				>120: ± 0.8	

Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
e	123519	2019-08-07	GAIEDB
d	63606	2009-07-07	MTR
c	60742	2008-10-27	MP
b	32882	2001-12-03	VOR

Sheet 01

Format DIN A4 | Projection | Scale 1:1

System NX V11.0

Replacement of Zg.gl.Nr.v.08.06.1998

Ident.	Document number	Index
K	10800304	e

Snap action switch

MARQUARDT

© Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Verfuegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.