



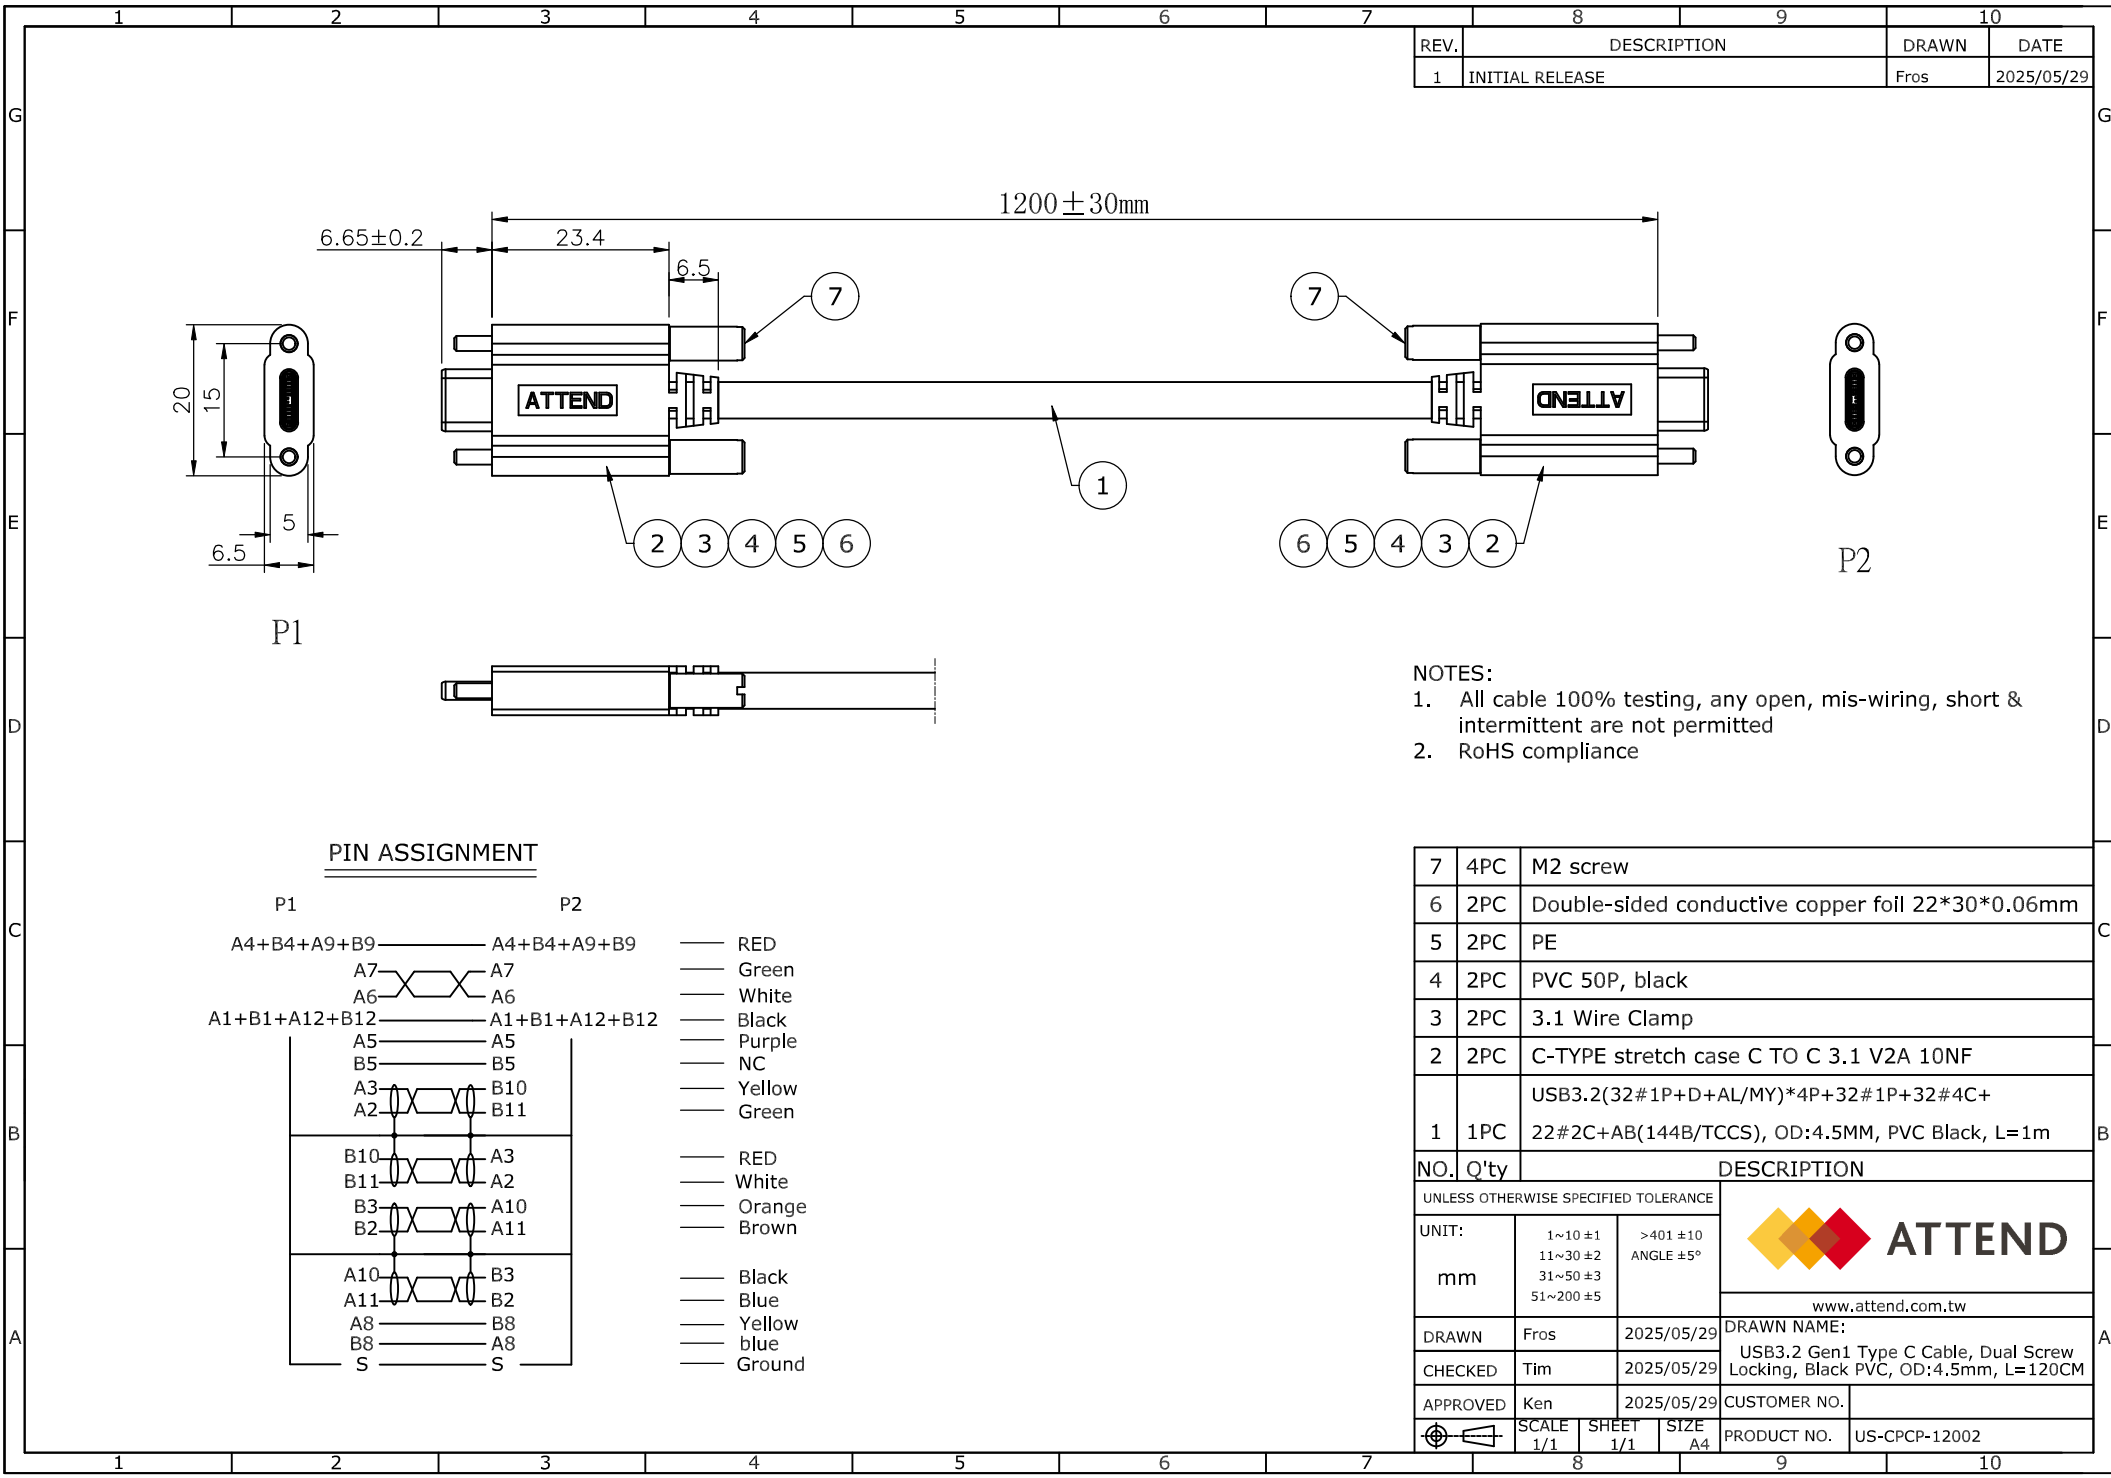

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2025/05/29

- NOTES:
1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
 2. RoHS compliance

PIN ASSIGNMENT

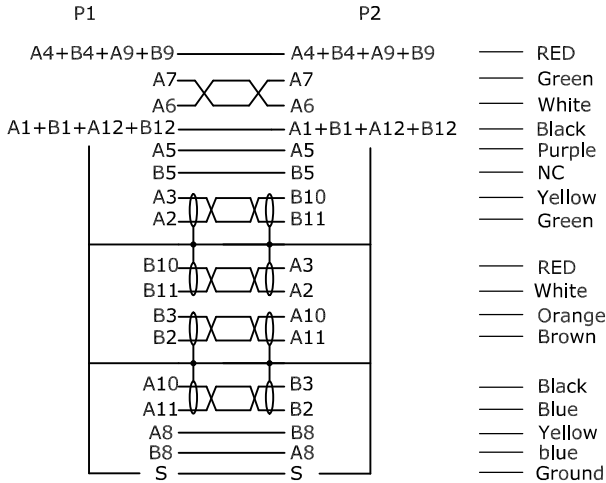

7	4PC	M2 screw
6	2PC	Double-sided conductive copper foil 22*30*0.06mm
5	2PC	PE
4	2PC	PVC 50P, black
3	2PC	3.1 Wire Clamp
2	2PC	C-TYPE stretch case C TO C 3.1 V2A 10NF
1	1PC	USB3.2(32#1P+D+AL/MY)*4P+32#1P+32#4C+ 22#2C+AB(144B/TCCS), OD:4.5MM, PVC Black, L=1m
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT: mm	1~10 ±1	 www.attend.com.tw
	11~30 ±2	
	31~50 ±3	
	51~200 ±5	
DRAWN	Fros	2025/05/29
CHECKED	Tim	2025/05/29
APPROVED	Ken	2025/05/29
SCALE	1/1	SHEET 1/1
SIZE	A4	PRODUCT NO. US-CPCP-12002
DRAWN NAME:		USB3.2 Gen1 Type C Cable, Dual Screw Locking, Black PVC, OD:4.5mm, L=120CM
CUSTOMER NO.		