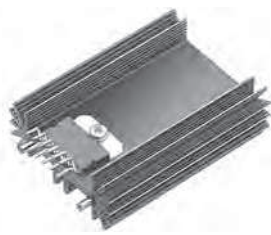
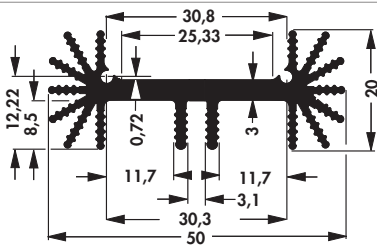
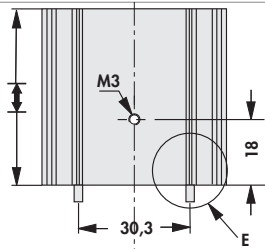




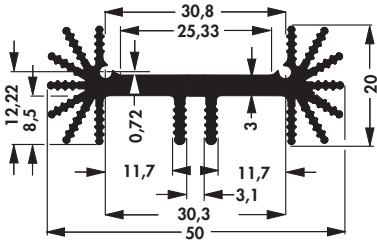
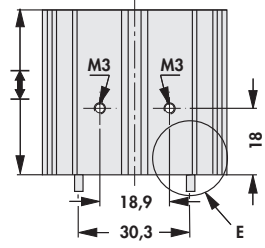





Extruded heatsinks for PCB mounting

- for semiconductor screw-mounting
- special lengths and transistor drillings on request
- **E** = mounting method

				
				
				
				
art. no.	l [mm]	R_{th} [K/W]	⚡	
SK 459 25 M ...	25.0	7.9	SIP-Multiwatt	
SK 459 37,5 M ...	37.5	6.3	SIP-Multiwatt	
SK 459 50 M ...	50.0	5.6	SIP-Multiwatt	
please indicate: ... mounting method				
STS = with solder pin				
STIS = with solder pins and insulating washer				
STSB = with threaded bolt M 3, brass				
surface:		black anodised		

- for semiconductor screw-mounting
- with **combination-hole pattern** for mounting of 2 x TO 220 or 2 x SOT 32
- special lengths and transistor drillings on request
- **E** = mounting method

				
				
				
				
art. no.	l [mm]	R_{th} [K/W]	⚡	
SK 459 25 2 x TO 220 ...	25.0	7.9	2xSOT 32/ 2xTO 220	
SK 459 37,5 2 x TO 220...	37.5	6.3	2xSOT 32/ 2xTO 220	
SK 459 50 2 x TO 220 ...	50.0	5.6	2xSOT 32/ 2xTO 220	
please indicate: ... mounting method				
STS = with solder pin				
STIS = with solder pins and insulating washer				
STSB = with threaded bolt M 3, brass				
surface:		black anodised		