

## Data sheet Product SL 6 121 46 Z



PCB connectors>Male headers


□ 0.635 mm

- **"S" selective gold-plated up to 33 mm pin length**
- for interconnections of stacked PCBs
- within the total length of the pin the insulator position can be changed as required ... **Design specification-sheet**
- **separable!** any requested number of contact can be delivered

### Features

grid:	2.54 mm
no. of contacts:	46
contact material:	CuSn alloy
surface of contact:	tin-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> <li>• Ni+≥0.2µm Au</li> <li>• Ni+4...6µm Sn</li> </ul>
version:	sandwich
volume resistance:	≤5 mΩ
nominal current:	3 A
nominal voltage:	250 V AC
test voltage:	2000 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> <li>• -40°C... +163°C</li> <li>• (260°C/10 s)</li> </ul>
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 <sup>7</sup> Ω·m
connection type:	THT (soldering)
reflow solderable:	yes

# Technical Drawing

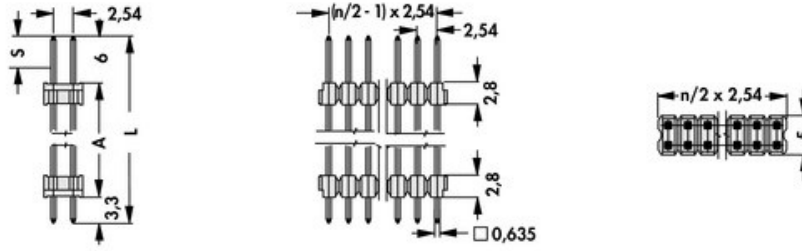

height: **12.1 mm**

L: **21.4 mm**

:

S: **6.0 mm**

**Fischer Elektronik GmbH & Co. KG**  
 DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
 58511 Lüdenscheid

Telefon +49 2351 435-0  
 Telefax +49 2351 45754

info@fischerelektronik.de  
 www.fischerelektronik.de