

Data sheet

236-404/000-009/999-950

**PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**



Technical data

Package size 220 pieces.

Pin spacing from	5 mm
Pin spacing up to	5.08 mm
Pin spacing from	0.197 in
Pin spacing up to	0.2 in
pole count	4
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Measured voltage EN	175 V
Current intensity EN	16 A
Weight	3.644 g
Color	light grey
Wiring type	Front-/Side-entry
No. of connection Points	4
No. of potentials	4
Height	13 mm
Height	0.512 in
Width	22.3 mm
Width	0.878 in
Depth	14 mm
Depth	0.551 in
Strip length from	5 mm

Data sheet

**236-404/000-009/999-950 PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/332-009/999-950	with 5,5 mm long solder pins
-------------------------	------------------------------

Data sheet

**236-404/000-009/999-950 PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Approval	Voltage	Current	Approval number	Notes
GOSENERGO-Ex	175	16	99.041	
KEMA-Ex	175	16	KEMA97ATEX4564U	


Data sheet

**236-404/000-009/999-950 PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Accessories	Item number
Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
OPERATING STICKER FOR PCB TERMINAL BLOCKS	210-191
OPERATING TOOL FITTED FOR SERIES 264, 280, 281	209-130
OPERATING TOOL METAL	236-335
OPERATING TOOL PLASTICS	236-332
Profile PCB 236, 255, 256	Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-161
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-162
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-163
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-164
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-160/237-106
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-166
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-167
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-168
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-169
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-165/237-126

Data sheet

236-404/000-009/999-950 PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION

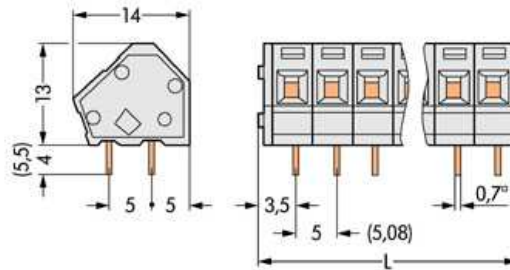

Data sheet

**236-404/000-009/999-950 PCB TERMINAL STRIP 2 SOLDER PINS / POLE
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Diameter of drilled hole: $1,1^{+0,1}$ mm
L = (No.of poles x pin spacing) + 2,3 mm