


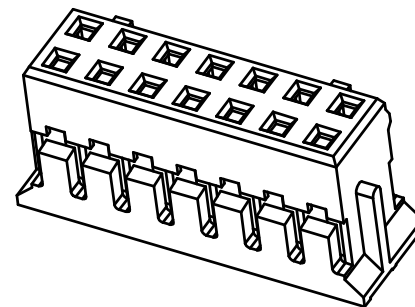

MATERIAL

Insulator : NYLON 66 UL94V-0

SPECIFICATION

Current Rate : 3A AC/DC

Insulation Resistance : 1000MΩMin.

Withstand Voltage : 800V AC/minute

Operation Temperature : -25°C to $+85^{\circ}\text{C}$


Contact Resistance: 20mΩmax

Q'ty: 1000pcs./Bag


1. No. of contacts

2. W: White Insulator

2. W. White Insulator.
3. Pinrex internal code.

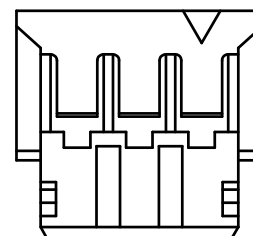

2*3PIN VIEW



2*2PIN VIEW

Poles	Dimensions(mm)		
	A	B	C
2x2	2.0	5.9	4.35
3x2	4.0	7.9	6.35
4x2	6.0	9.9	8.35
5x2	8.0	11.9	10.35
6x2	10.0	13.9	12.35
7x2	12.0	15.9	14.35
8x2	14.0	17.9	16.35
9x2	16.0	19.9	18.35
10x2	18.0	21.9	20.35
11x2	20.0	23.9	22.35
12x2	22.0	25.9	24.35
13x2	24.0	27.9	26.35
14x2	26.0	29.9	28.35
15x2	28.0	31.9	30.35
16x2	30.0	33.9	32.35
17x2	32.0	35.9	34.35
18x2	34.0	37.9	36.35
19x2	36.0	39.9	38.35
20x2	38.0	41.9	40.35



			TOLERANCE			OLD PART NO.		TITLE		 頻銳科技股份有限公司			
			.0 =±.30	UNITS : mm	SCALE NONE	SIZE A4	DRAWER	CHECK	2.00 mm Crimp Style Connectors Housing	 PINREX TECHNOLOGY CORP.	DRAW NO. 725-75-xxW006(C版)		
C	修改尺寸	2020/07/20	.00 =±.20				姜文慧	李劍					
B	REVISE DESCRIPTION	2012/08/06	.000 =±.XXX				SHEET	REV.				APP'D	NEW PART NO.
A	RELEASE	2012/05/28	.0000=±. ANG.=±3'				1 OF 1	C				李劍	725-75-xxW006
REV.	DESCRIPTION	DATE											