

# Data sheet Product LA LED 40 x 30




Heatsinks and active heatsinks for processors>Heatsinks for LEDs  
for Power PC

## Features

|                     |                                                                                                             |
|---------------------|-------------------------------------------------------------------------------------------------------------|
| way of fixation:    | <ul style="list-style-type: none"> <li>• therm. conductive foil</li> <li>• therm. cond. adhesive</li> </ul> |
| thermal resistance: | 1.4 K/W                                                                                                     |
| dissipation loss:   | 35 W                                                                                                        |
| surface:            | Al-natural                                                                                                  |

## Technical Drawing

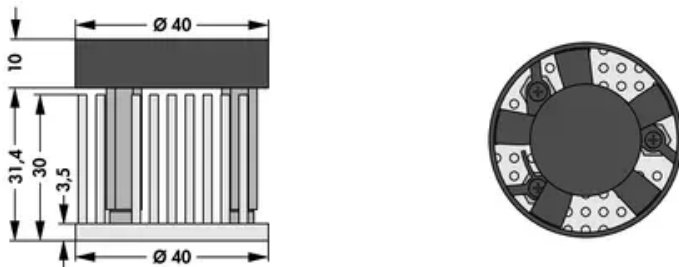

## Fan

|                       |                                   |
|-----------------------|-----------------------------------|
| circuit voltage:      | 12 V                              |
| bearing type:         | two-way plain bearing             |
| cur. consumpt.:       | 50 mA                             |
| max. iuitial current: | 160 mA                            |
| max. volume flow:     | 157 l/min - 9.4 m <sup>3</sup> /h |
| max. static pressure: | 3.4 mmH <sub>2</sub> O - 33 Pa    |
| noise level:          | 26 dB(A), 1 m lateral             |

|                                  |                               |
|----------------------------------|-------------------------------|
| temperature range:               | <b>-20°C... +60°C</b>         |
| failure rate (L <sub>10</sub> ): | <b>60,000 h</b>               |
| MTBF:                            | <b>1,900,000 h (20°C)</b>     |
| type rotor speed:                | <b>6,600 min<sup>-1</sup></b> |
| weight:                          | <b>10 g</b>                   |

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de