

























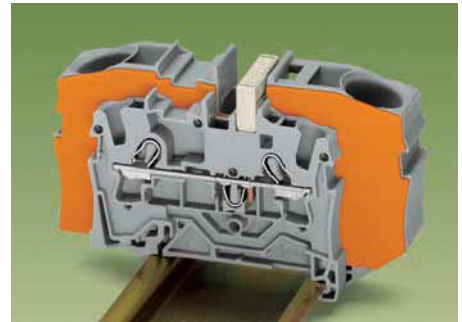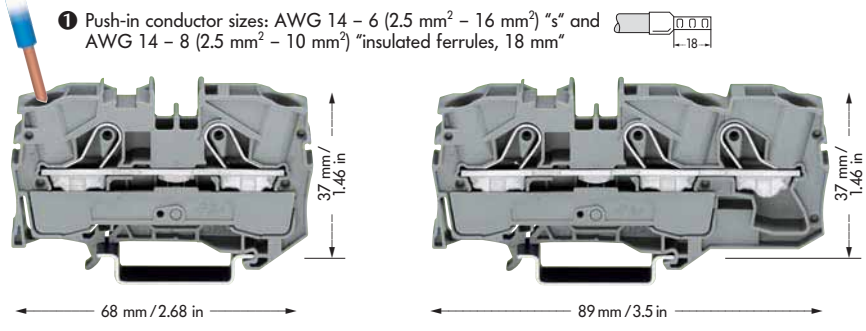




























TOPJOB[®]S Rail-Mounted Terminal Blocks 10 (16) mm²/AWG 6 Series 2010

0.5 – 10 (16) mm² ① 800 V/8 kV/3 57 A Terminal block width 10 mm / 0.394 in  17 – 19 mm / 0.71 in *  	AWG 20 – 6 600 V, 65 A   600 V, 65 A  	0.5 – 10 (16) mm² ① 800 V/8 kV/3 57 A Terminal block width 10 mm / 0.394 in  17 – 19 mm / 0.71 in *  	AWG 20 – 6 600 V, 65 A   600 V, 65 A  	Commoning with step-down jumpers Note: The total current flowing must not exceed the rating of the step-down jumper/push-in type jumper bar.
--	---	---	---	--



Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
2-conductor through terminal blocks		3-conductor through terminal blocks		Commoning with step-down jumpers	
grey 2010-1201 	25	grey 2010-1301 	25	An end plate must be applied between the two terminal blocks.	
blue 2010-1204 	25	blue 2010-1304 	25	Step-down jumper 2016-499 can be used for commoning AWG 8/6 (10/16 mm ²) terminal blocks with AWG 8/10/12/14 (10/6/4/2.5 mm ²) terminal blocks.	
orange 2010-1202 	25	orange 2010-1302 	25	Step-down jumpers are simply pushed down to full insertion, in the same way as all other push-in type jumper bars.	
2-conductor ground (earth) terminal block		3-conductor ground (earth) terminal block			
green-yellow 2010-1207 	25	green-yellow 2010-1307 	25		
Ex e II applications are being prepared		Ex e II applications are being prepared			
 Suitable for Ex i applications		 Suitable for Ex i applications			
Accessories appropriate marker system WMB/Miniature WSB/Marker strips (see section 14)					
End and intermediate plate, 1 mm / 0.039 in thick		End and intermediate plate, 1 mm / 0.039 in thick		Step-down jumper, light grey, insulated	
 orange 2010-1292 100 (4 x 25)		 orange 2010-1392 100 (4 x 25)		 57 A	
 grey 2010-1291 100 (4 x 25)		 grey 2010-1391 100 (4 x 25)		2016-499	50 (2 x 25)
Push-in type jumper bars, light grey, insulated, I_N 57 A		Push-in type jumper bars, light grey, insulated, I_N 57 A			
 2-way 2010-402 50 (2 x 25)		 2-way 2010-402 50 (2 x 25)			
 3-way 2010-403 50 (2 x 25)		 3-way 2010-403 50 (2 x 25)			
 4-way 2010-404 50 (2 x 25)		 4-way 2010-404 50 (2 x 25)			
 5-way 2010-405 50 (2 x 25)		 5-way 2010-405 50 (2 x 25)			
Push-in type jumper bars, light grey, insulated, I_N 57 A		Push-in type jumper bars, light grey, insulated, I_N 57 A			
 1 - 3 2010-433 50 (2 x 25)		 1 - 3 2010-433 50 (2 x 25)			
 1 - 4 2010-434 50 (2 x 25)		 1 - 4 2010-434 50 (2 x 25)			
 1 - 5 2010-435 50 (2 x 25)		 1 - 5 2010-435 50 (2 x 25)			
Protective warning marker, for 5 terminal blocks		Protective warning marker, for 5 terminal blocks			
 yellow 2010-115 100 (4 x 25)		 yellow 2010-115 100 (4 x 25)			
Test plug adapter, for test plug 4 mm Ø		Test plug adapter, for test plug 4 mm Ø			
 2009-174 100 (4 x 25)		 2009-174 100 (4 x 25)			
Testing tap, for max. 2.5 mm²		Testing tap, for max. 2.5 mm²			
 2009-182 100 (4 x 25)		 2009-182 100 (4 x 25)			
Marker strip, white, plain for center marking		Marker strip, white, plain for center marking			
 11 mm / 0.433 in wide		 11 mm / 0.433 in wide			
50 m 2009-110	1	50 m 2009-110	1		
on roll 300 m 2009-130	1	on roll 300 m 2009-130	1		

* For further approvals with corresponding ratings see section 15.