
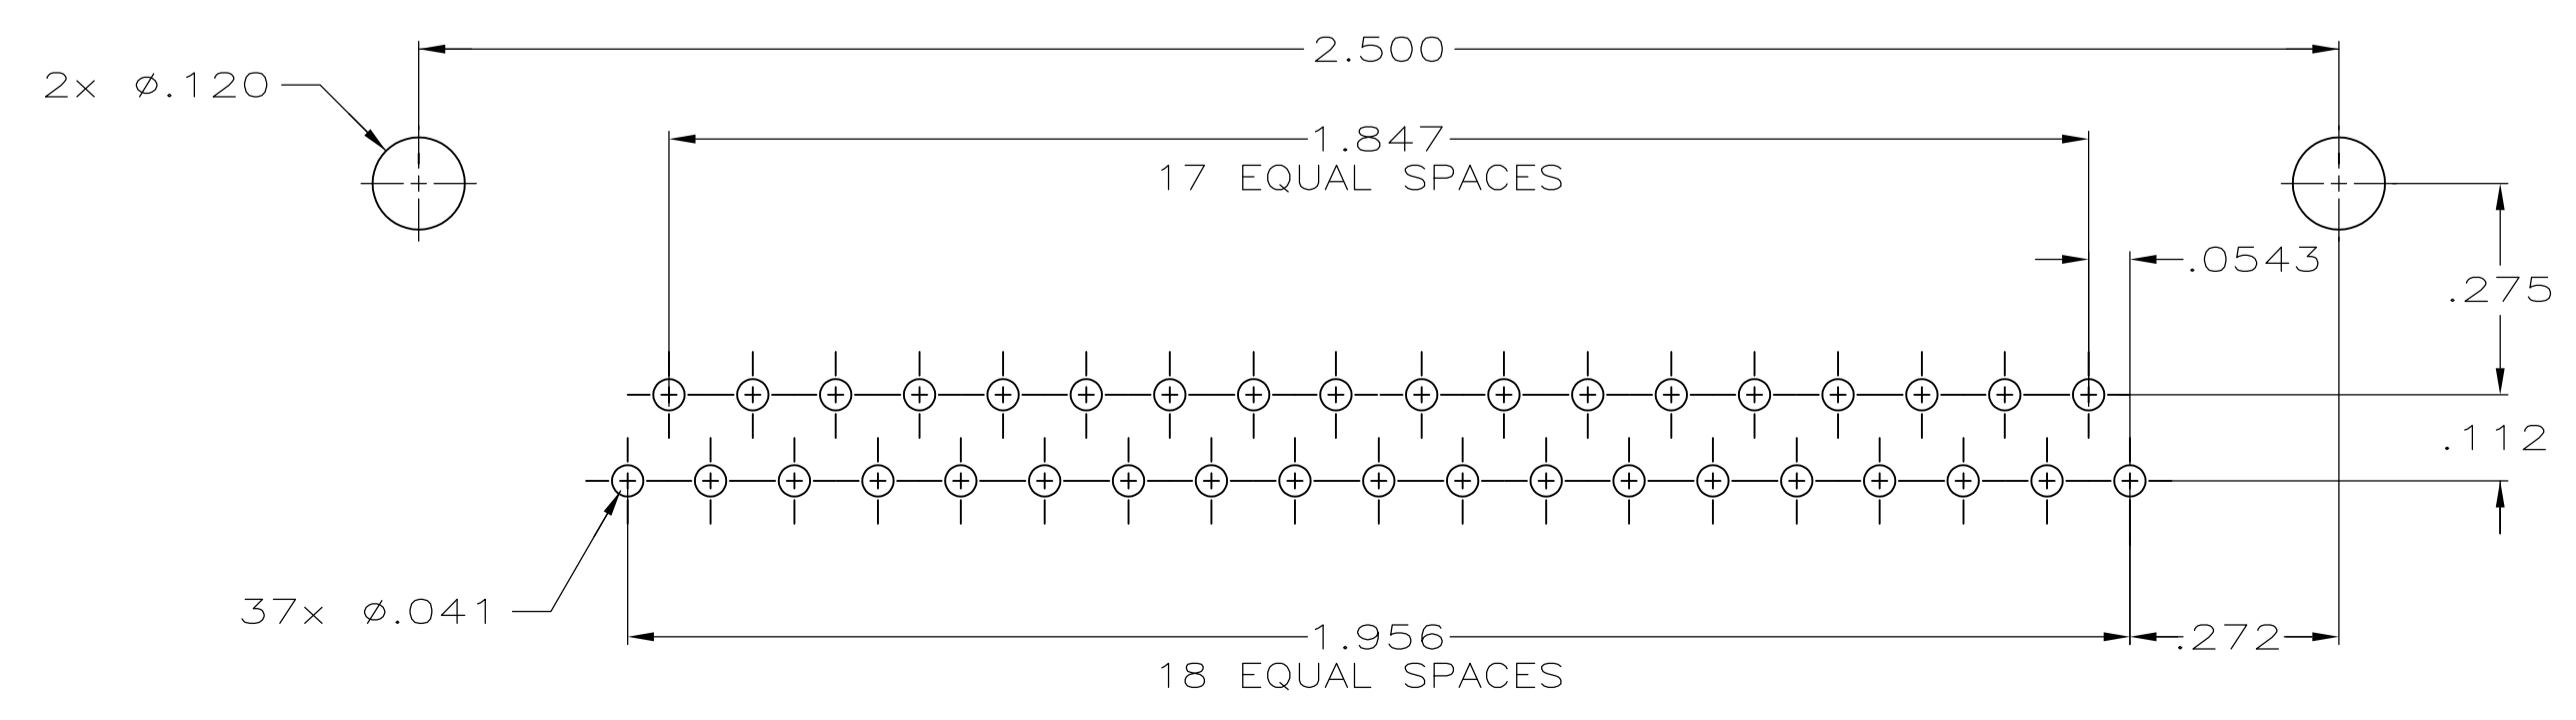
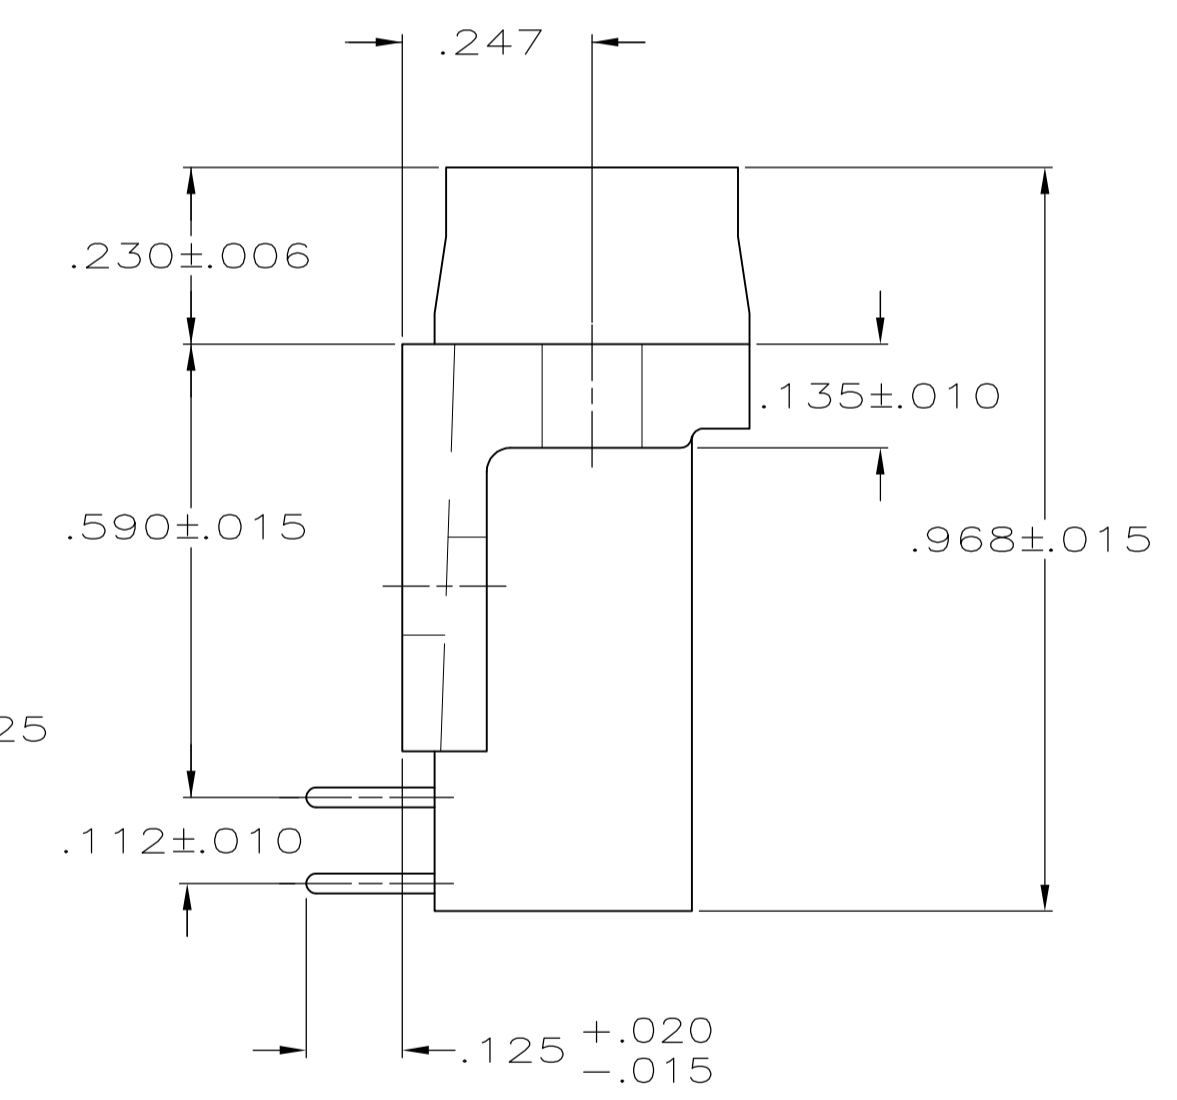


- 1 HOUSING: FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK
CONTACTS: BRASS
- 2 REFER TO APPLICATION SPEC FOR RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS FOR AUTOMATIC INSERTION.
- 3 CONTACTS: .000030 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER END, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT
-OR-
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER END, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT.

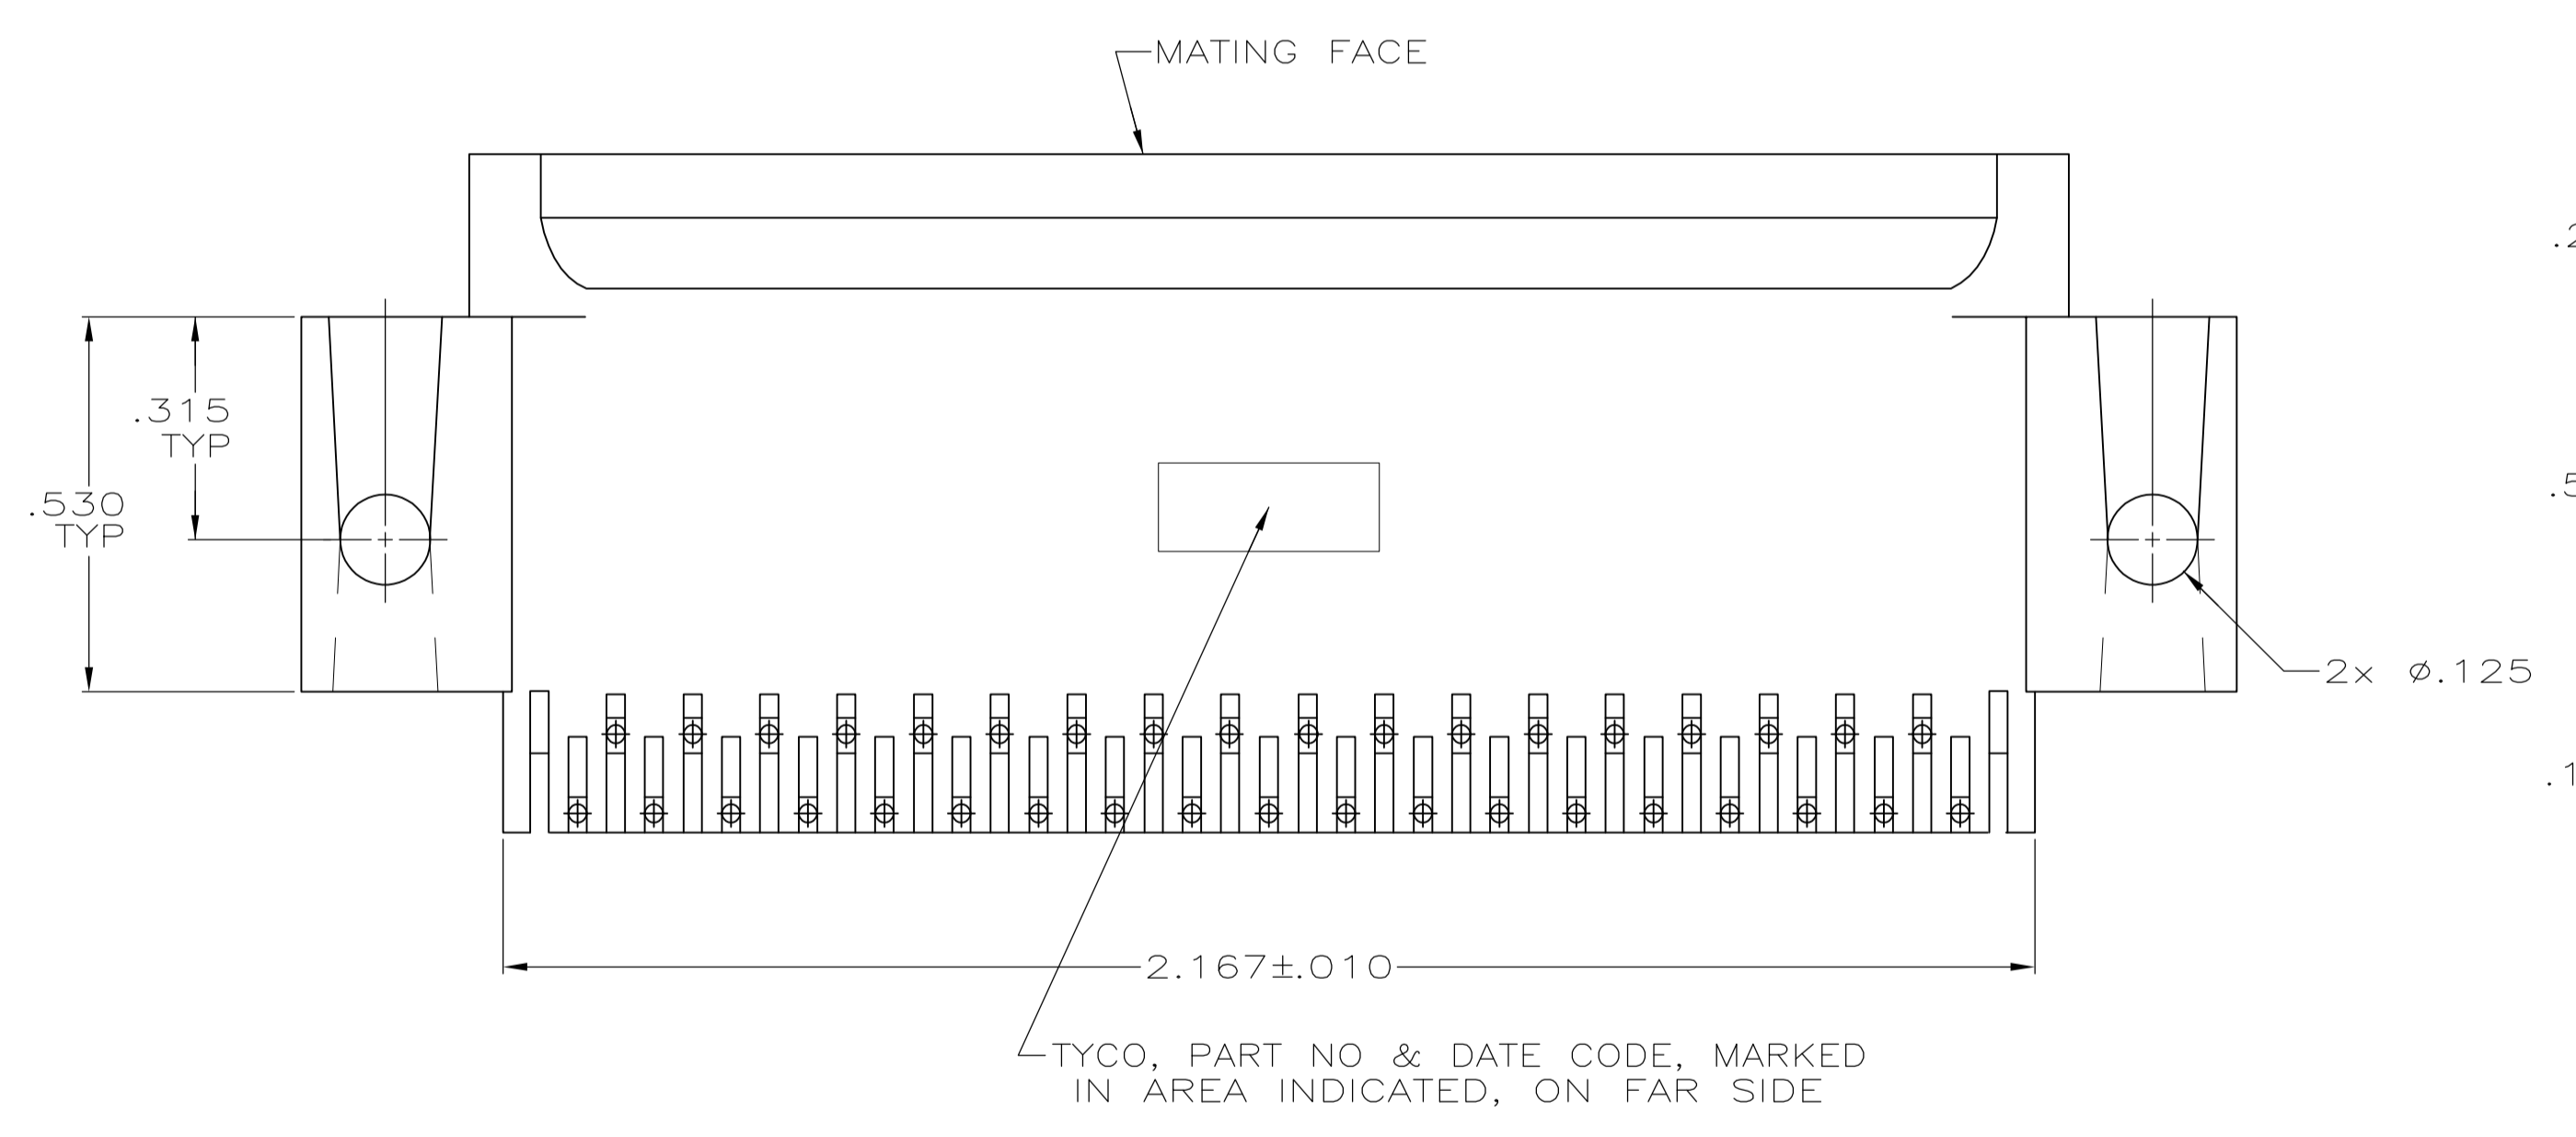

RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS

**COPYRIGHT 2005
 TYCO ELECTRONICS CORP
 ALL RIGHTS RESERVED**

5747470-2
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN G. PETERS 19SEP05	TE Connectivity	
DIMENSIONS: INCHES		CHK S. BOLASH 19SEP05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D M. WALMSLEY 19SEP05	PRODUCT SPEC	
0. PLC	± .005	108-40025		
1. PLC	± .005	APPLICATION SPEC		
2. PLC	± .005	114-40015		
3. PLC	± .005	SIZE		
4. PLC	± .005	WEIGHT		
ANGLES	± .2°	A1 00779 C=5747470		
MATERIAL	FINISH	CUSTOMER DRAWING		
		SCALE	SHEET	REV
		4:1	1 of 1	B