


- Chassis mount with screw terminal block
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Very high efficiency up to 93%
- No minimum load
- Soft start
- Adjustable output voltage +10/-20%
- Sense line
- Remote On/Off input
- Under voltage lock-out circuit

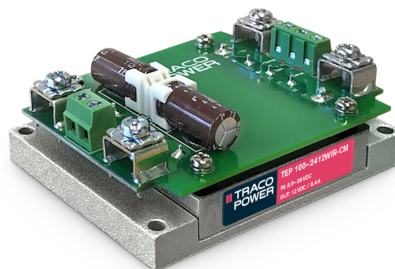

The TEP 100WIR Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges which come in a rugged, sealed industry standard half brick package. A very high efficiency allows full power operation without forced air cooling at 60°C. This temperature can be increased to 70°C with optional mounted heatsink or up to 85°C when mounted on an iron base plate. The very wide input voltage range and reverse input voltage protection make these converters an interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for on board power distribution.

Options

TEP-MK1	- Optional DIN-Rail Mounting Kit: www.tracopower.com/products/tep-mk1.pdf
on demand (backorder with MOQ non stocking item)	- Optional model with 3.3 VDC / 25'000 mA Output and 9 - 36 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 9 - 36 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 9 - 36 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 9 - 36 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 9 - 36 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 9 - 36 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 9 - 36 VDC Input - Optional model with 3.3 VDC / 25'000 mA Output and 18 - 75 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 18 - 75 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 18 - 75 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 18 - 75 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 18 - 75 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 18 - 75 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 18 - 75 VDC Input - Optional model with 3.3 VDC / 25'000 mA Output and 43 - 160 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 43 - 160 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 43 - 160 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 43 - 160 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 43 - 160 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 43 - 160 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 43 - 160 VDC Input - Inverse Remote On/Off function (passive = off)

Input Specifications

Input Current	- At no load	24 Vin models: 20 mA typ. 48 Vin models: 15 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 185 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.3 VDC min. / 7.5 VDC typ. / 8.1 VDC max. 48 Vin models: 15.5 VDC min. / 16 VDC typ. / 16.3 VDC max. 110 Vin models: 33 VDC min. / 34.5 VDC typ. / 36 VDC max.
Recommended Input Fuse		24 Vin models: 20'000 mA (fast acting) 48 Vin models: 12'000 mA (fast acting) 110 Vin models: 5'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-20% to +10% (By external trim resistor) See application note: www.tracopower.com/overview/tep100wircm Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%)	0.1% max. 0.1% max.
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 5 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 12 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 15 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 24 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 28 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 48 Vout models: 300 mVp-p max. (w/ 2.2 µF X7R)
Capacitive Load		3.3 Vout models: 75'700 µF max. 5 Vout models: 40'000 µF max. 12 Vout models: 7'000 µF max. 15 Vout models: 4'460 µF max. 24 Vout models: 1'750 µF max. 28 Vout models: 1'280 µF max. 48 Vout models: 430 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		75 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		150% typ. of Iout max. (110 Vin models) 120 - 150% (other models)
Overvoltage Protection		115 - 130% of Vout nom.
Transient Response	- Response Time	200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 60950-1 IEC 60950-1 UL 60950-1
	- Railway Applications	EN 50155
	- Certification Documents	www.tracopower.com/overview/tep100wircm

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
External filter proposal: www.tracopower.com/overview/tep100wircm		
EMS Immunity	- Electrostatic Discharge	Air: EN 50155 (Railway Applications) EN 55024 (IT Equipment) Contact: EN 61000-4-2, ± 8 kV, perf. criteria A EN 61000-4-2, ± 6 kV, perf. criteria A
	- RF Electromagnetic Field - EFT (Burst) / Surge	EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 2 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 24 Vin models: 2 x KY 220 μ F 48 Vin models: 2 x KY 220 μ F 110 Vin models: 2 x KXJ 150 μ F
	- PF Magnetic Field	Continuous: EN 61000-4-6, 10 Vrms, perf. criteria A 1 s: EN 61000-4-8, 100 A/m, perf. criteria A EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity	95% max. (non condensing)	
Temperature Ranges	- Operating Temperature	-40°C to +75°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-40°C to +105°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tep100wircm
Over Temperature Protection Switch Off	- Protection Mode	115°C typ. (Automatic recovery at 105°C typ.)
	- Measurement Point	Base-Plate
Cooling System	Natural convection (20 LFM)	
Sense Function	10% max. of Vout nom.	
Remote Control	- Voltage Controlled Remote	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	3 mA typ.
	- Remote Pin Input Current	-0.5 to 1.0 mA (Optional models with inverse logic available)
Altitude During Operation	2'000 m max.	
Switching Frequency	300 kHz typ. (PWM) ($\pm 10\%$, 110 Vin models)	
	250 kHz typ. (PWM) ($\pm 10\%$, other models)	
Insulation System	Reinforced Insulation	
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC (110 Vin models) 2'250 VDC (other models)
	- Input to Case, 60 s	1'500 VAC (110 Vin models) 1'600 VDC (other models)
	- Output to Case, 60 s	1'500 VAC (110 Vin models) 1'600 VDC (other models)
Isolation Resistance	- Input to Output, 500 VDC	1'000 M Ω min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	409'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	MIL-STD-810F EN 61373
	- Mechanical Shock	MIL-STD-810F EN 61373
	- Thermal Shock	MIL-STD-810F
Housing Material	Alu base-plate w. plastic case (110 Vin models)	
	Alu base-plate w. metal case (other models)	

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Base Material	Non-conductive FR4 (UL94 V-0 rated) (24 Vin & 48 Vin models only)
Potting Material	Silicone (UL 94 V-0 rated)
Connection Type	Screw Terminal
Weight	235 g
Thermal Impedance	6.7 K/W
Environmental Compliance	- Reach www.tracopower.com/info/reach-declaration.pdf - RoHS www.tracopower.com/info/rohs-declaration.pdf - Flammability (EN 45545-2) www.tracopower.com/info/en45545-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep100wircm

Outline Dimensions

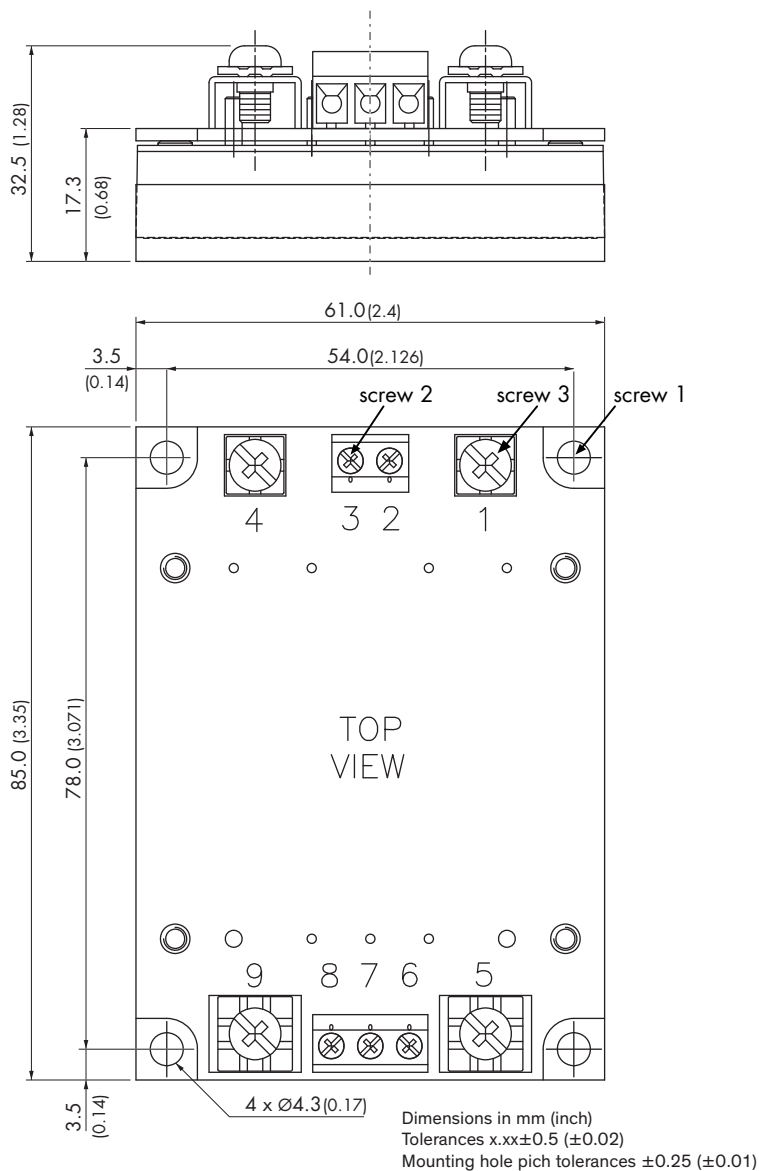

Pinout	
Pin	Function
1	-Vin (GND)
2	NC
3	Remote
4	+Vin (Vcc)
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NC: No Connection

The screw 1 locked torque:
MAX 11.2kgf-cm/1.14N-m

The screw 2 locked torque:
MAX 5.2kgf-cm/0.51N-m

The screw 3 locked torque:
MAX 12.0kgf-cm/1.18N-m