


## Analog output ► 4 ... 20 mA



750-555

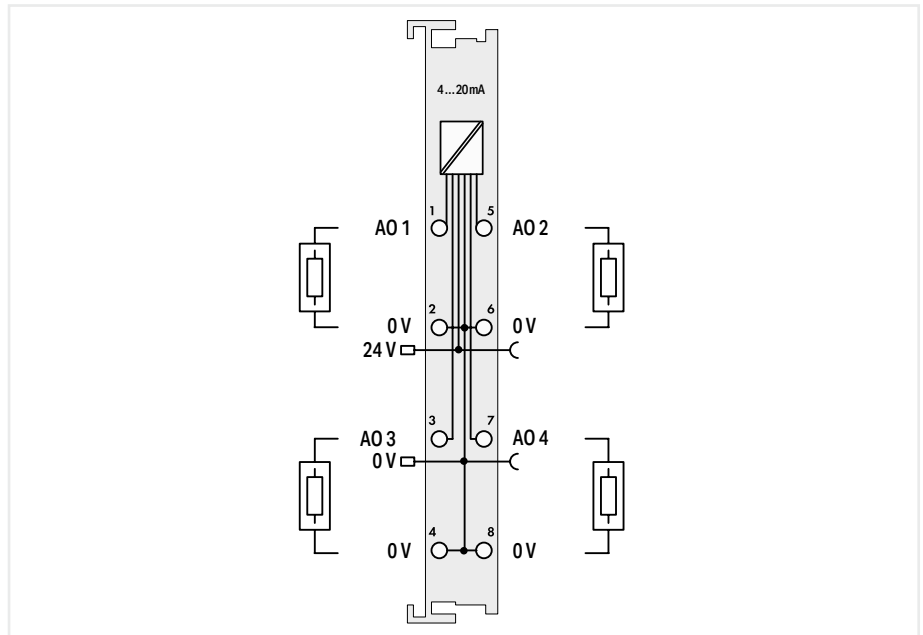

Item description	4-Channel Analog Output; 4 ... 20 mA	
Version	Standard	pluggable (delivery without connector)
Item no.	750-555	753-555
Order Text	4AO; 4-20mA	4AO; 4-20mA
Technical data		
Pluggable connector	-	pluggable
Number of analog outputs		4
Signal type		Current
Signal type (current)		4 ... 20 mA DC
Actuator connection		4 x (2-wire)
Load impedance		Either 0 ... 300 Ω or 300 ... 600 Ω (same resistance for all load impedances)
Resolution [bit]		12 bits
Conversion time (typ.)		10 ms
Output error, reference temperature		25 °C
Output error, deviation (max.) of the upper-range value		0.1 %
Temperature error (max.) of the output range value		0.01 %/K
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption (5 V system supply)		60 mA
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)	
Isolation		500 V system/field
Ambient temperature (operation)		0 ... +55 °C
Dimensions W x H x D		(12 x 100 x 69.8) mm
Approvals	CE; L Marine; OrdLoc/HazLoc; ATEX/IECEx	
For data sheet and additional information, see:	wago.com/750-555	wago.com/753-555
Accessories	Item no.	Item no.
Plug	-	753-110