


NOTES:

- 1.MATERIALS
HOUSING: LCP 30%GF, UL 94V-0, COLOR:BLACK.
CONTACT: BRASS C2680 T=0.25mm
SHELL: BRASS C2680 T=0.30mm
- 2.FINISH
CONTACT:15μ" GOLD ON CONTACT AREA, 100μ" MIN. TIN
ON SOLDER TAIL, WITH ENTIRE CONTACT
UNDERPLATED 50μ" MIN. NICKEL.
SHELL: 50μ" MIN. NICKEL PLATED.
- 3.ELECTRICAL
CONTACT RESISTANCE: 30 MILLIOHMS
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
CURRENT RATING: 1.5A
VOLTAGE RATING: 500V AC
INSULATION RESISTANCE: 1000M OHM MIN
- 4.ENVIRONMENTAL
OPERATING TEMPERATURE:-55°C TO +85°C

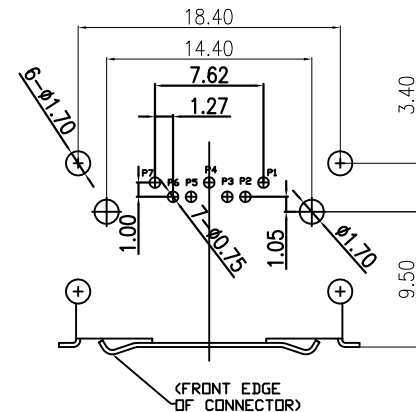

RECOMMEND P.C.BOARD MOUNTING DIMENSIONS t=1.60mm
PCB TOLERANCE:±0.05

Product Number	Description
215B-SEB0	E SATA 7P Male 90° DIP Type LCP Black With Shell,Contact Plating 15u"

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/08/03
CHECKED	Angel	2012/08/03
APPROVED	Ken	2012/08/03



www.attend.com.tw

DRAWN NAME:
ESATA 7P Socket 90° Dip Type With Shell

PRODUCT NO. 215B-SEB0

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1.0	215B-SEB0_B_2