

Material

Material: Nylon66, UL94V-0

SPECIFICATION

Current Rating: 1A AC, DC




Voltage Rating: 125V AC/ max.

Operating Temp.: -40°C ~ +85°C

Insulation Resistance: 100MΩ/ min.

Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20MΩ/ max.

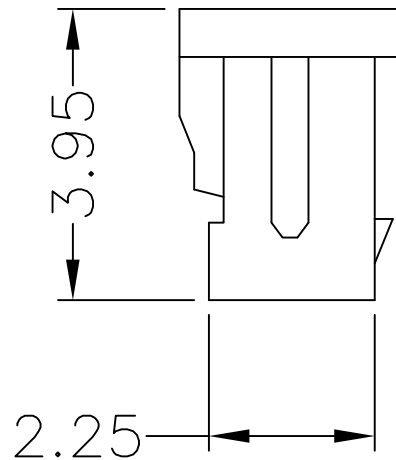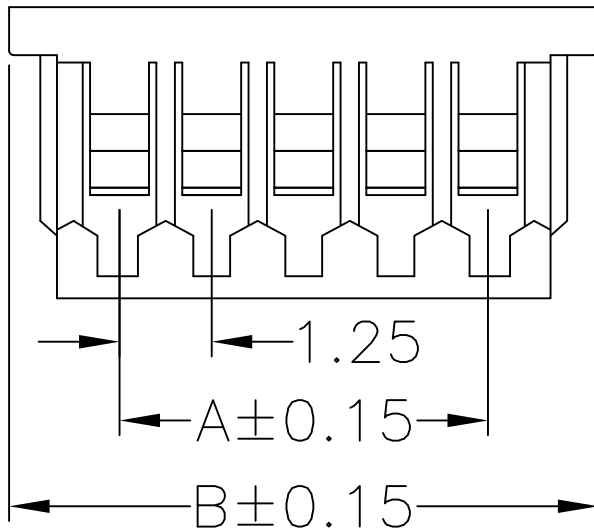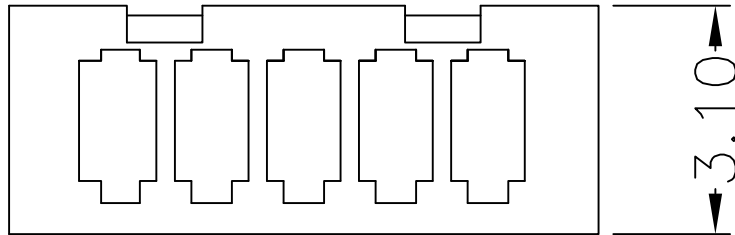

712-7 5-xx W 0 0 1
1 2 3 4

- 5: Normal Parts
7: Green Product
9: Green Product High Temp
- No. of contacts per row
- S: Crystal insulator
W: Nature Color Insulator
- Pinrex internal code.

Poles	Dimension mm (in.)	
	A	B
2	1.25(0.049)	4.25(0.167)
3	2.50(0.098)	5.50(0.217)
4	3.75(0.148)	6.75(0.266)
5	5.00(0.197)	8.00(0.315)
6	6.25(0.246)	9.25(0.364)
7	7.50(0.295)	10.50(0.413)
8	8.75(0.344)	11.75(0.463)
9	10.00(0.394)	13.00(0.512)
10	11.25(0.443)	14.25(0.561)
11	12.50(0.492)	15.50(0.610)
12	13.75(0.541)	16.75(0.659)
13	15.00(0.591)	18.00(0.709)
14	16.25(0.640)	19.25(0.758)
15	17.50(0.689)	20.50(0.807)



REV.	DESCRIPTION	DATE	TOLERANCE	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
D	更新图面	2019/12/26	.0 =±.30	SCALE NONE	A4	1 OF 1	D	李剑	712-75-xxW001	712-75-xxW001(D版)
C	ADD SIZE	2013/09/06	.00 =±.20							
B	REVISE ILLUSTRATION	2009/02/10	.000 =±.XXX							
A	RELEASE	2006/03/16	.0000=±.							
			ANG.=±3'							

OLD PART NO.	TITLE
DRAWER 杨海琴	1.25mm HOUSING
CHECK 李剑	

Pinrex Technology Corp.
PINREX TECHNOLOGY CORP.