

## Data sheet

734-154

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CLOSED END**



## Technical data

Package size 50 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	24
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	5.804 g
Color	light grey
Height	10.3 mm
Height	0.406 in
Width	86.4 mm
Width	3.402 in
Depth	8.5 mm
Depth	0.335 in

---

**Data sheet**

734-154

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CLOSED END**

---

<b>Approval</b>	<b>Voltage</b>	<b>Current</b>	<b>Approval number</b>	<b>Notes</b>
CCA	250	10	123898-02	
CCA	250	10	NL5641	
KEMA	250	10	2077592.02	

---

**Data sheet**

734-154

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CLOSED END**

---

**Accessories**

CODING KEY TO BE SNAPPED ABOVE TOP LEVEL


**Item number**

734-130

## Data sheet

734-154

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CLOSED END**

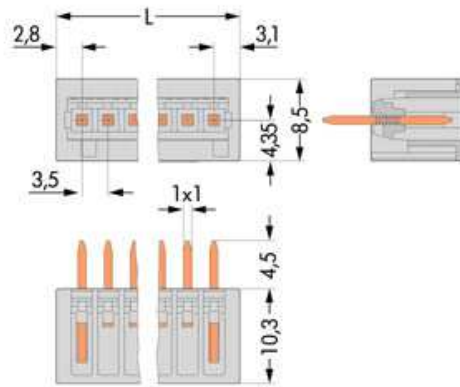

---

Data sheet

734-154

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN  
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH  
CLOSED END**

---

Diameter of drilled hole:  $1,4^{+0,1}$  mm

$L = (\text{No. of poles} - 1) \times \text{pin spacing} + 5,9$  mm