
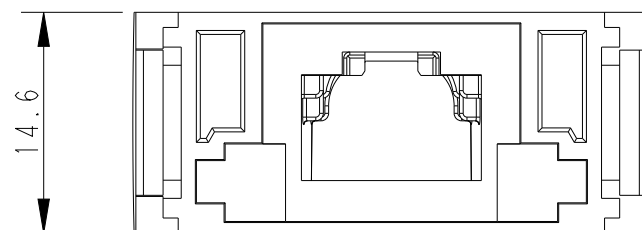
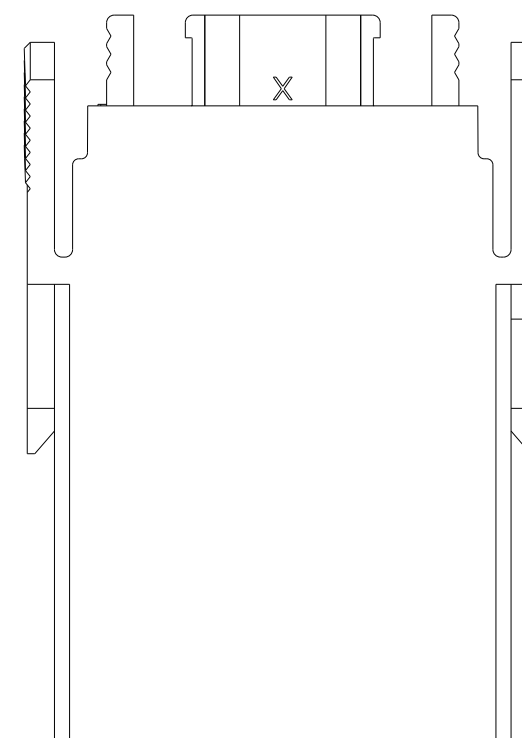
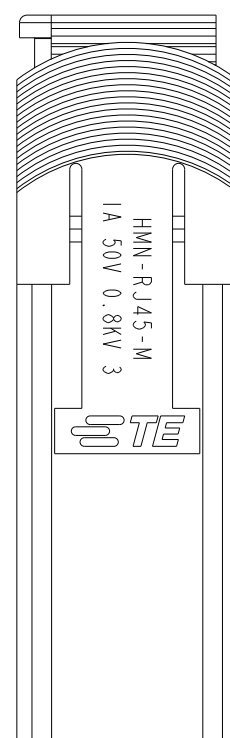
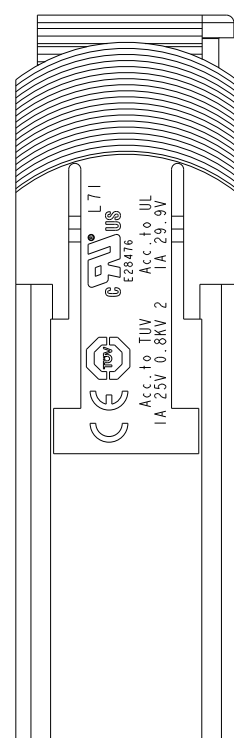
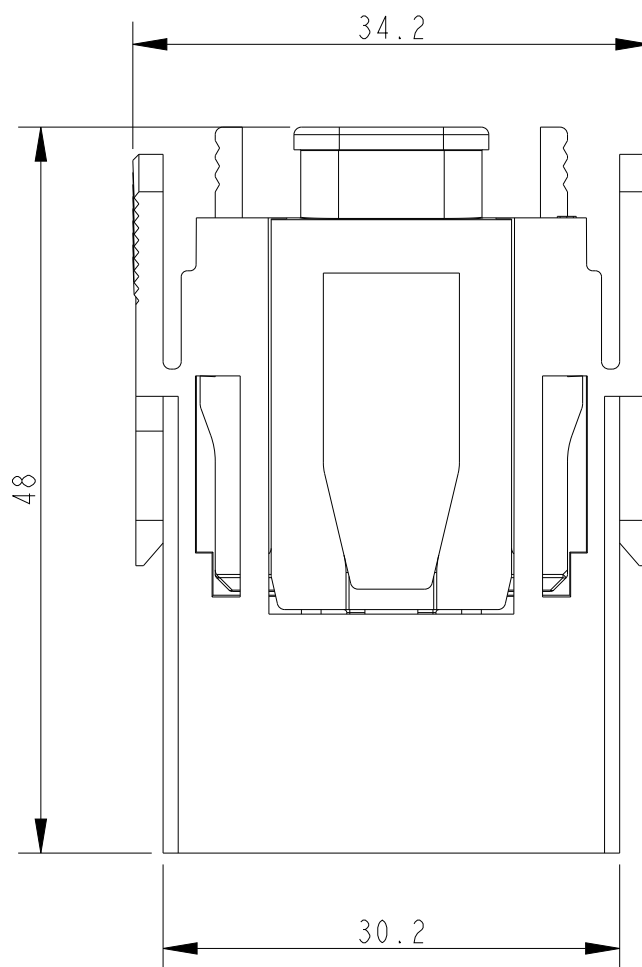
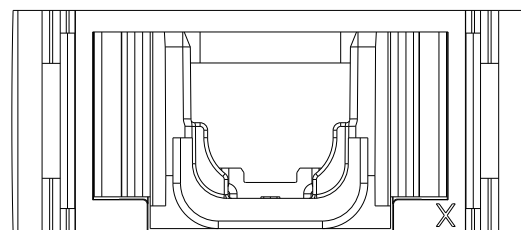


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	30 JUL 2020	GY	CW
	A1	ECR-20-016041	7 FEB 2021	GY	CW
	B	ECR-21-103103	13 MAY 2021	GY	CW
	C	ECR-21-111798	07 OCT 2021	WQR	CW


NOTES:
 1. TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 50V
 RATED CURRENT: 1A
 INSULATION RESISTANCE: $\geq 400M\Omega$
 RATED IMPULSE VOLTAGE: 0.8KV
 POLLUTION DEGREE: 3
 MATING CYCLES: 500
 OPERATION TEMPERATURE: $-40^{\circ}C \sim +70^{\circ}C$

注释:
 1. 技术参数:
 绝缘材料: PC
 额定电压: 50V
 额定电流: 1A
 绝缘电阻: $\geq 400M\Omega$
 脉冲电压: 0.8KV
 污染等级: 3
 插拔次数: 500
 工作温度: $-40^{\circ}C \sim +70^{\circ}C$

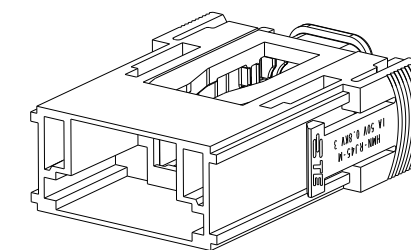

Notification: Please check suitability of your plug to this product.

T2113000101-200	HMN-RJ45-M	HMN-RJ45 MALE MODULE INSERT HMN-RJ45 公插
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO.YAO 30 JUL 2020	 TE Connectivity NAME HMN-RJ45-M	
DIMENSIONS: mm		CHK CHRIS.WANG 30 JUL 2020		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHRIS.WANG 30 JUL 2020		
0 PLC \pm - 1 PLC \pm - 2 PLC \pm - 3 PLC \pm - 4 PLC \pm - ANGLES \pm -		PRODUCT SPEC 108-137516		
MATERIAL -		FINISH -	APPLICATION SPEC 114-137516	SIZE A3
			WEIGHT -	CAGE CODE 00779
			CUSTOMER DRAWING	DRAWING NO T2113000101200
				RESTRICTED TO -
				SCALE 1:1
				SHEET 1 OF 1
				REV C