

Data sheet Product LA V 24 400 24




Cooling aggregates>Cooling aggregates with axial fan

155 x 158 mm, with axial fan and air-flow chamber

Features

width:	155 mm
height:	158 mm
length:	400 mm
thermal resistance:	0.078 - 0.025 K/W
surface:	- aluminium natural/degreased/cutting edges not deburred (by the metre not degreased/cutting edges not deburred) - mounting area(s) milled flat
operating voltage of the fan motor:	24 V DC 230 V AC

Technical Drawing

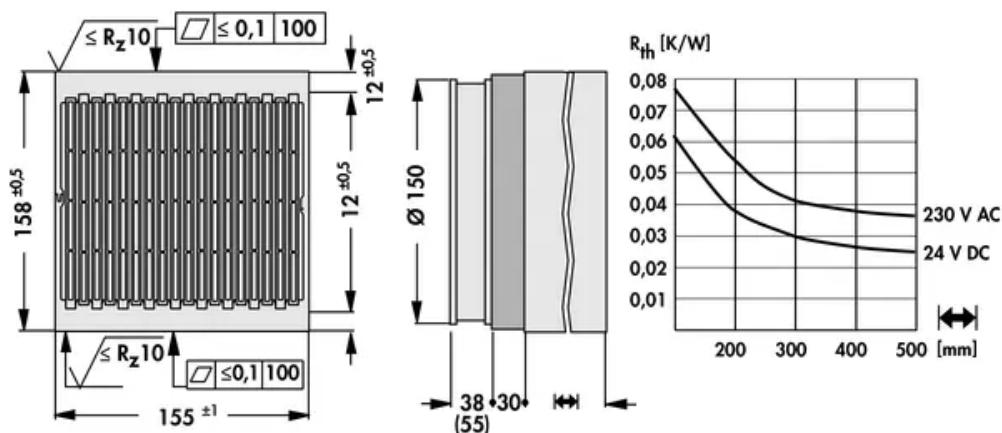

Fan

type:	ebmpapst, ball bearing, with saftey guard
dimensions:	Ø150x38 mm
tension:	24 V DC
power inout:	19 W
max. air volume:	366 m³/h
temperature range:	-25°C... +72°C
noise level:	58 dB(A)
speed:	3,350 min⁻¹
weight:	620 g
failure rate (L ₁₀):	L₁₀ > 75,000 h (40°C)
type:	ebmpapst, ball bearing, with saftey guard
dimensions:	Ø150x55 mm
tension:	230 V AC
power inout:	47 W
max. air volume:	380 m³/h
temperature range:	-25°C ... +50°C
noise level:	60 dB(A)
speed:	2,700 min⁻¹
weight:	1,100 g
failure rate (L ₁₀):	L₁₀ > 40,000 h (40°C)