

Data sheet

734-113

FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION



Technical data

Package size 50 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	13
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	1.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	9.928 g
Color	light grey
No. of connection Points	13
No. of potentials	13
Height	13.4 mm
Height	0.528 in
Width	47.7 mm
Width	1.878 in
Depth	18.6 mm
Depth	0.732 in
Strip length from	7 mm
Strip length to	7 mm

Data sheet

734-113

**FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

Strip length

0.28 in

xxx-xxx/035-000

Strain relief plate 35 mm

Data sheet

734-113

**FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

Approval	Voltage	Current	Approval number	Notes
CCA	250	10	123898-02	
CCA	250	10	NL5641	
KEMA	250	10	2077592.02	

Data sheet

734-113

**FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**


Accessories**Item number**

OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	734-230
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
STRAIN RELIEF PLATE FOR SERIES 734	734-126

Data sheet

734-113

FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION

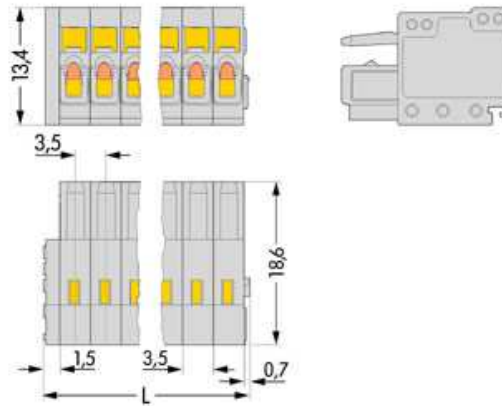

Data sheet

734-113

**FEMALE PLUG 13 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

$L = (\text{No. of poles} \times \text{pin spacing}) + 2,2 \text{ mm}$