## **DTM165-C Series**

## 160W to 165W Medical AC-DC External Power Supplies

## **Features**

- ◆ CEC, ErP and EISA<sup>(1)</sup> level V Compliant Models
- ◆ Wide Range AC Input
- ◆ Medical Certifications
- ♦ > 87% Average Efficiency

## **Key Market Segments & Applications**








Specifications				
Model		DTM165PWxxx-C		
Input Voltage range	VAC	90 - 264VAC (47 - 63Hz)		
Inrush Current	Α	<130A at 230VAC input, 25°C ambient cold start		
Input Current	Α	2.5A at 90VAC, Full Load		
Power Factor	-	Meets EN61000-3-2. >0.9 PF		
Leakage Current (264VAC 60Hz)	uA	<300uA		
Hold Up Time (Typ)	ms	>10ms		
Temperature Coefficient	%/°C	±0.05%/°C		
Voltage Accuracy	%	±1%		
Adjustment Range	V	None		
Minimum Load	Α	None		
Total Regulation	%	12V to 19V Models:±5%, >19V models ±3%		
Ripple & Noise	%	1%		
Short Circuit Protection	-	<160% - hiccup mode		
Overvoltage Protection	V	120 - 150% of nominal (Cycle input power to reset)		
Efficiency	%	>87% average efficiency		
Operating Temperature	°C	0 to +60°C, derate linearly 50% load from 40 to 60°C		
Storage Temperature	°C	-10 to +80°C		
Humidity (non condensing)	%RH	0 - 90%RH		
Cooling	-	Convection		
Withstand Voltage	VAC	Input to Ground 1.5kVAC, Input to Output 4kVAC (Reinforced)(2 x MOPPs)  (Output is isolated from Ground)		
Vibration (non operating)	-	23.52m/s <sup>2</sup> (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)		
Shock	-	< 196.1 m/s <sup>2</sup> (20G)		
Safety Agency Certification	-	UL60601-1, EN60601-1, IEC60601-1, CE Mark		
Efficiency Level	-	CEC, ErP, EISA level V		
Offload Power Consumption	W	< 0.5W		
Conducted & Radiated EMI	-	EN55011, FCC Part 18 Class B		
Immunity	-	EN55011:2007+A2:2007		
Weight (Typ)	g	790		
Size (LxWxH)	mm	170 x 85 x 44mm		
Size (LxWxH)	in	6.7 x 3.35 x 1.73"		
Cable Length	mm	1050mm		
AC Input Connector	-	IEC 320-C14 (Accepts IEC 320-C13)		
Output Connector	-	Kycon KPPx-4P or equivalent		
		Pins 1 & 2: -Vout, Pins 3 & 4: +Vout		
Warranty	yrs	Three Years		

<sup>(1)</sup> EISA - Energy Independence and Security Act of 2007

Output Ratings					
Model	Output (V)	Maximum Output (A)	Maximum Power (W)		
DTM165PW120C	12	13.333	160		
DTM165PW150C	15	10.67	160		
DTM165PW190C	19	8.42	160		
DTM165PW240C	24	6.88	165		
DTM165PW280C	28	5.89	165		
DTM165PW360C	36	4.58	165		
DTM165PW480C	48	3.44	165		

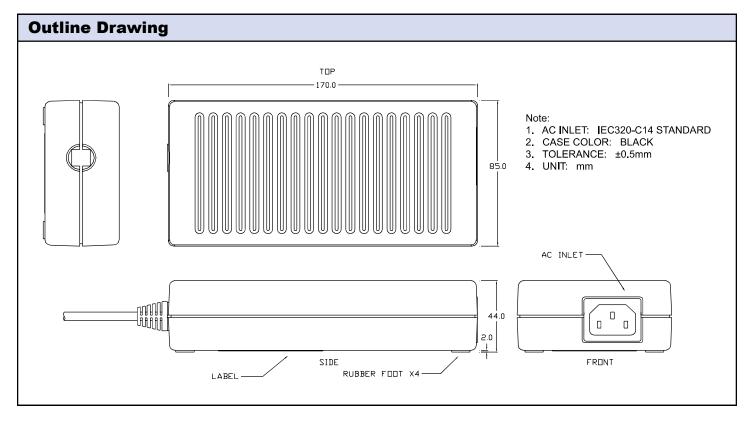

Other AC-DC Products			
DT62-D	62W CEC Compliant Adapters		
DTM65-C	40W to 65W Medical Adapters		
DT80-D	80W CEC Compliant Adapters		
DT100 / 150-C/D	100W & 150W CEC Compliant Adapters		
DTM110-C	90W to 110W Medical Adapters		

For Additional Information, please visit https://product.tdk.com/en/power/

