

## Data sheet

232-242/005-000

**FEMALE PLUG WITH RIGHT ANGLE LONG CONTACT PINS  
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING  
FLANGES**



## Technical data

Package size 25 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	12
Voltage CSA	300 V
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	11.87 g
Color	grey
Height	11.6 mm
Height	0.457 in
Width	61.5 mm
Width	2.421 in
Depth	18.25 mm
Depth	0.719 in

xxx-xxx/039-000

with locking devices

---

**Data sheet**

232-242/005-000

**FEMALE PLUG WITH RIGHT ANGLE LONG CONTACT PINS  
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING  
FLANGES**

---

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/699/03	
BV	400	16	11915/A0	
CCA	250	12	DK2127	
CSA	300	15	18677-30	
CSM	500/250	12	017956	
DEMKO	250		88126	
GL	250	12	17296-00HH	
KEMA	250	12	98.2486.01	
LR	250	12	96/20035	
NEMKO	250		P94101840	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	

---

**Data sheet**

232-242/005-000

**FEMALE PLUG WITH RIGHT ANGLE LONG CONTACT PINS  
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING  
FLANGES**

---


**Accessories****Item number**

OPERATING TOOL INSULATED	280-432
OPERATING TOOL INSULATED	280-433
OPERATING TOOL INSULATED	280-434
OPERATING TOOL INSULATED	280-435
OPERATING TOOL INSULATED	280-436
OPERATING TOOL INSULATED	280-437
OPERATING TOOL INSULATED	280-438
OPERATING TOOL INSULATED	280-439
OPERATING TOOL INSULATED	280-440
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137

Data sheet

232-242/005-000

**FEMALE PLUG WITH RIGHT ANGLE LONG CONTACT PINS  
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING  
FLANGES**

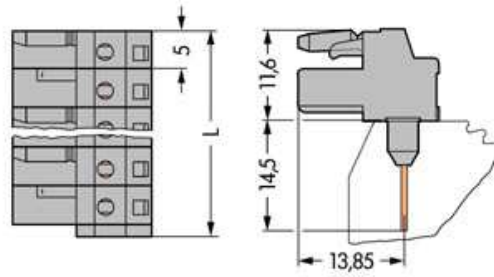

---

Data sheet

232-242/005-000

**FEMALE PLUG WITH RIGHT ANGLE LONG CONTACT PINS  
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING  
FLANGES**

---

$L = (\text{No. of poles} \times \text{pin spacing}) + 1,5 \text{ mm}$