


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
			J1	REVISED PER ECO-11-004587	11MAR11	RK	HMR

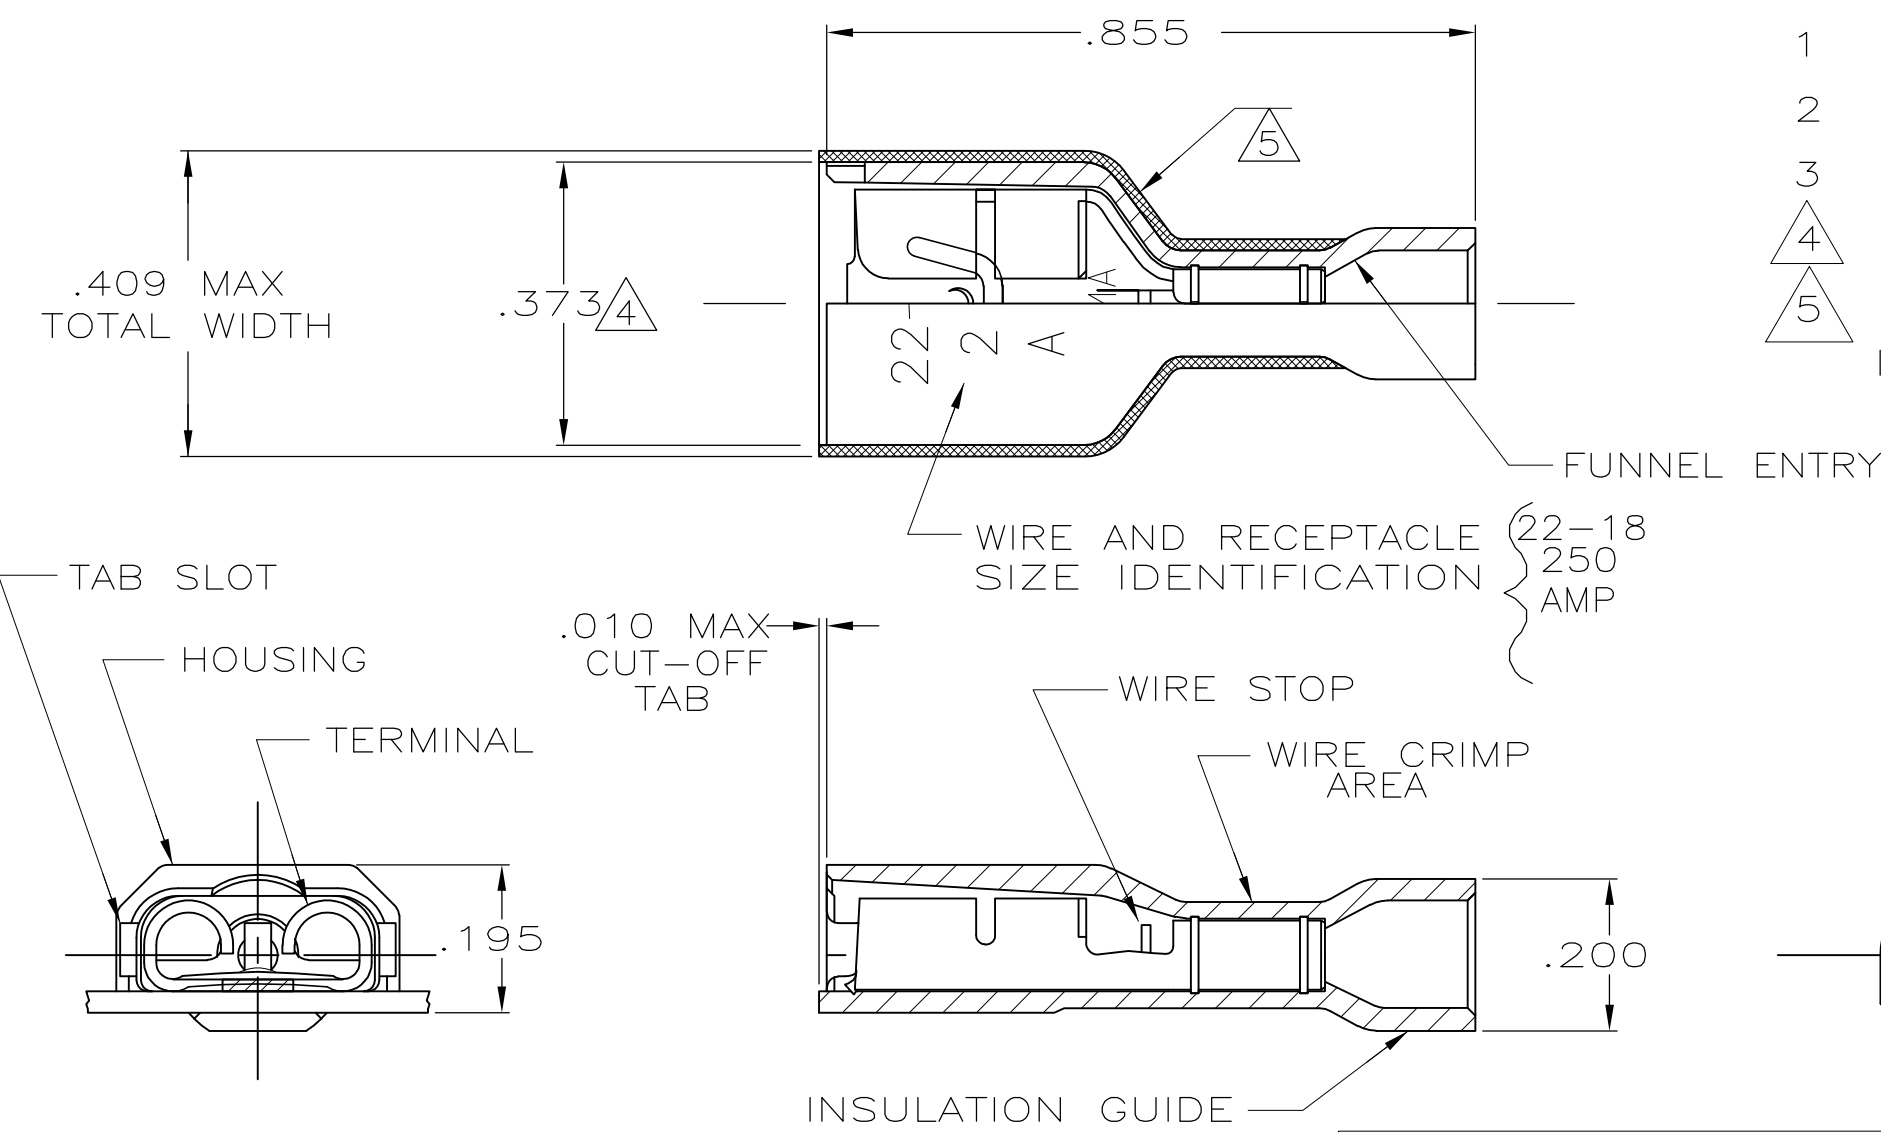

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- △4 DIMENSION DOES NOT INCLUDE TRIM BURR
- △5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD PH BRONZE, TIN .000080 MIN	2-520184-4
HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN	2-520184-2
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	P FORTNEY	10/18/88	 TE Connectivity	NAME RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .250 SERIES, 22-18 AWG		
DIMENSIONS: INCHES		CHK	JR RUTH	10/18/88				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	K RANDOLPH	10/21/88				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± -		PRODUCT SPEC	108-2043					
MATERIAL SEE TABLE		FINISH	SEE TABLE		APPLICATION SPEC	114-2123		
		WEIGHT		-		RESTRICTED TO	-	
		CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	
				SIZE	A3	CAGE CODE	00779	
				DRAWING NO	C-520184		REV	J1