

Data sheet

236-852

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**



Technical data

Package size 400 4*100 pieces.

| | |
|---------------------------------------|----------------------|
| Pin spacing from | 7.5 mm |
| Pin spacing up to | 7.62 mm |
| Pin spacing from | 0.295 in |
| Pin spacing up to | 0.3 in |
| pole count | 1 |
| Cross section from [mm ²] | 0.08 mm ² |
| Cross section to [mm ²] | 2.5 mm ² |
| Cross section from [AWG] | 28 AWG |
| Cross section to [AWG] | 12 AWG |
| Voltage UL | 300 V |
| Voltage CSA | 300 V |
| Current UL | 15 A |
| Measured voltage EN | 400 V |
| Measured shock voltage | 6 kV |
| Pollution degree | 3 |
| Current intensity EN | 16 A |
| Measured voltage EN | 800 V |
| Measured shock voltage | 6 kV |
| Pollution degree | 2 |
| Current intensity EN | 16 A |
| Weight | 1.063 g |
| Color | black |
| Wiring type | Front-/Side-entry |

Data sheet

236-852

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

| | |
|--------------------------|----------|
| No. of connection Points | 1 |
| No. of potentials | 1 |
| Height | 13 mm |
| Height | 0.512 in |
| Width | 7.62 mm |
| Width | 0.3 in |
| Depth | 14 mm |
| Depth | 0.551 in |
| Strip length from | 5 mm |
| Strip length to | 6 mm |
| Strip length | 0.22 in |

Data sheet

236-852

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Accessories


Item number

| | |
|---|-----------------------------------|
| END PLATE 1 MM / 0.039 IN THICK | 236-850 |
| Jumper GDS RM 5mm | Jumper PCB Spacing 5mm |
| Jumper GDS RM 7,5mm | Jumper PCB Spacing 7.5mm |
| OPERATING STICKER FOR PCB TERMINAL BLOCKS | 210-191 |
| OPERATING TOOL FITTED FOR SERIES 264, 280, 281 | 209-130 |
| OPERATING TOOL METAL | 236-335 |
| OPERATING TOOL PLASTICS | 236-332 |
| Profile PCB 236, 255, 256 | Profile PCB 236, 255, 256 |
| Profile PCB 257, 736, 737, 738 | Profile PCB 257, 736, 737, 738 |
| SCREWDRIVER-SET WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm | 210-622 |
| SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN | 210-257 |
| SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN | 210-258 |
| SCREWDRIVER Type 2, bar (3,5 x 0,5) mm | 210-120 |
| SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm | 210-620 |
| SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.5MM | 249-171 |
| SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.5MM | 249-170/236-704 |
| SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.62 MM | 249-173 |
| SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.62 MM | 249-172/236-708 |

Data sheet

236-852

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

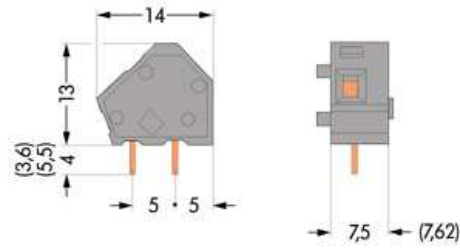

Data sheet

236-852

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Diameter of drilled hole: 1,1^{+0,1} mm