

2JP0804P

CELLULAR Rigid Fiberglass

Key Features

CELLULAR

- 824-960 MHz
- 1710-2170 MHz
- Embedded Antenna
- Self-Adhesive
- High Performance
- Ground Plane Independent
- Dimensions 35 x 6.5 x 1.8 mm
- Customizable Cable and Connector



1. Antenna and electrical specifications

Parameters	CELLULAR Antenna	
Standards	2G and 3G	
Band (MHz)	850/900	1700/1800/1900/2100
Frequency (MHz)	824-960	1710-2170
Return Loss (dB)	~ -8.2	~ -5.5
VSWR	~ 3.2:1	~ 3.7:1
Efficiency (%)	~ 52.3	~ 45.0
Peak Gain (dBi)	~ 3.1	~ 1.7
Average Gain (dB)	~ -3.0	~ -3.7
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	Most RF Connectors (U.FL Standard)	
Cable Length	Any Cable Length (100mm Standard)	
Cable Type	Other Cables Available (1.37mm Standard)	

Antenna Measurement Conditions:

Mounted on Plastic Plate of 30 x 30 cm



100 mm 1.37 mm Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JP0804P
Mounting Type	Adhesive Mount
Dimensions (mm)	35 x 6.5 x 1.8mm
Adhesive Type	Duplocoll DC6338
Material	Rigid Fiberglass
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

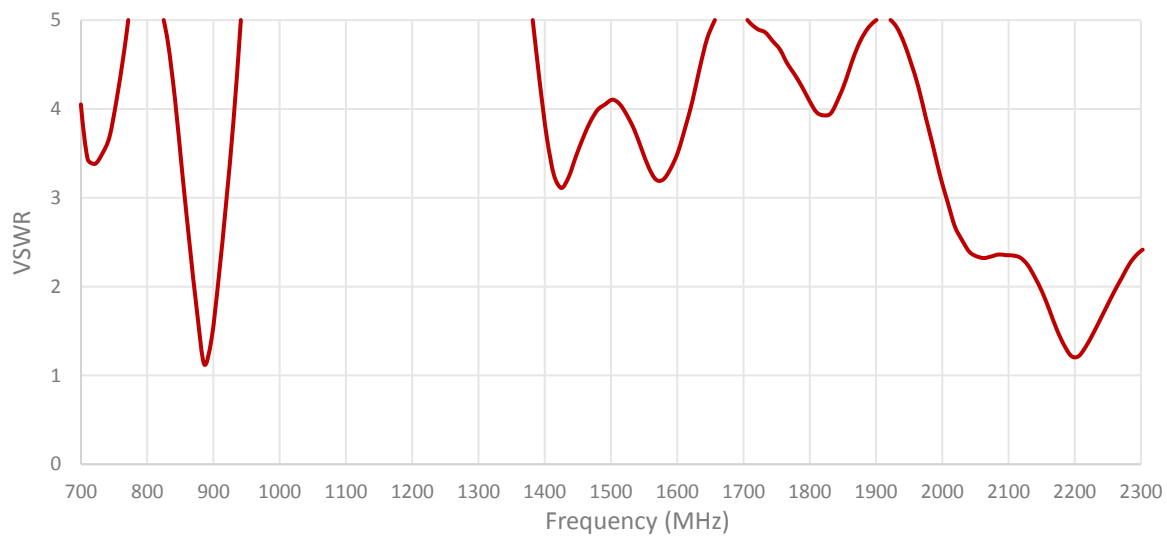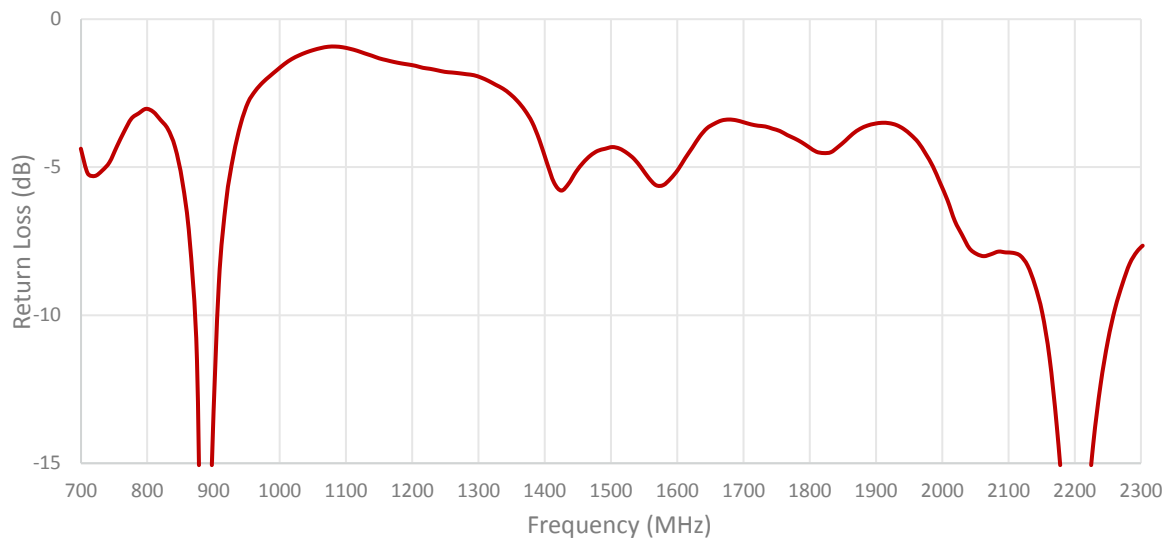

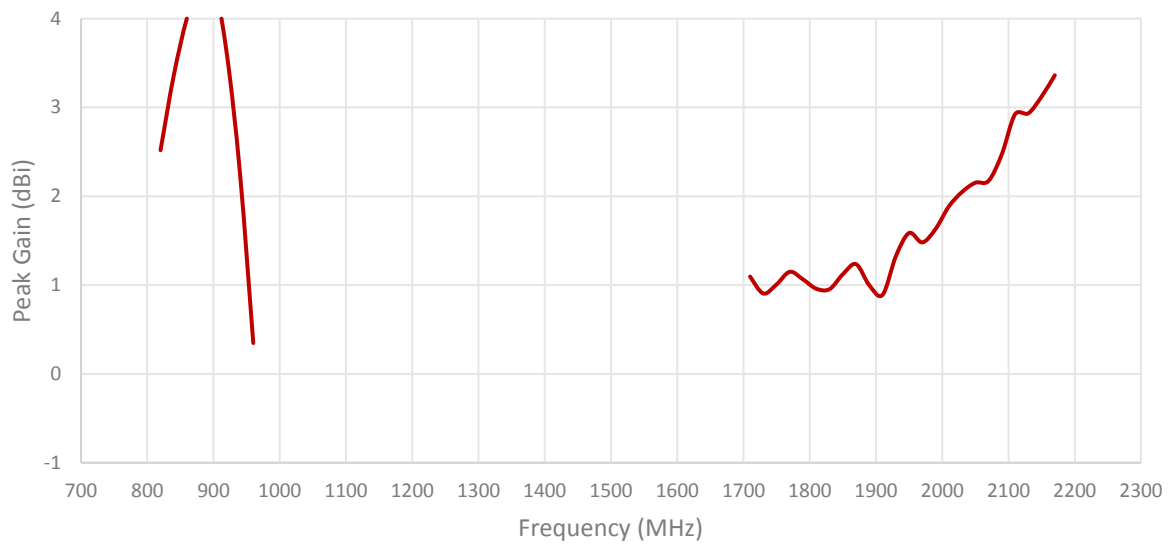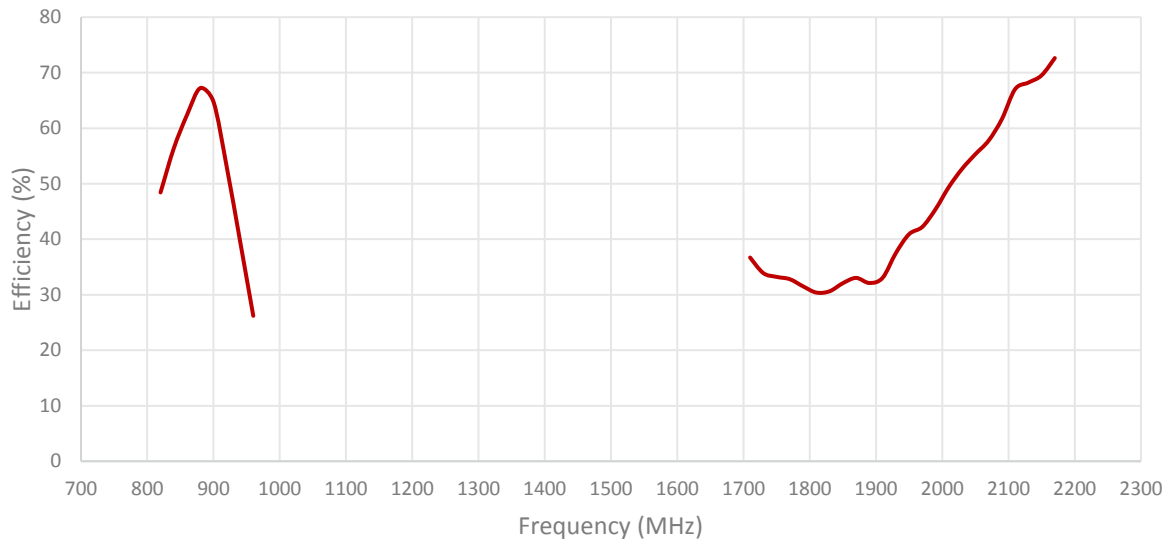


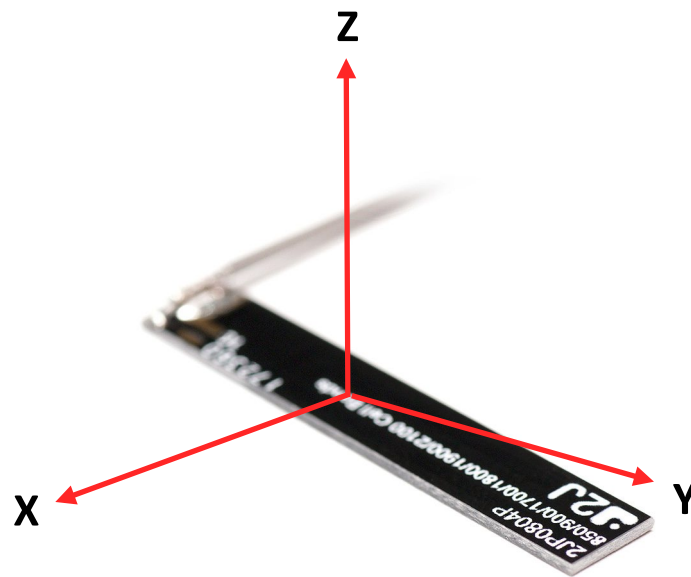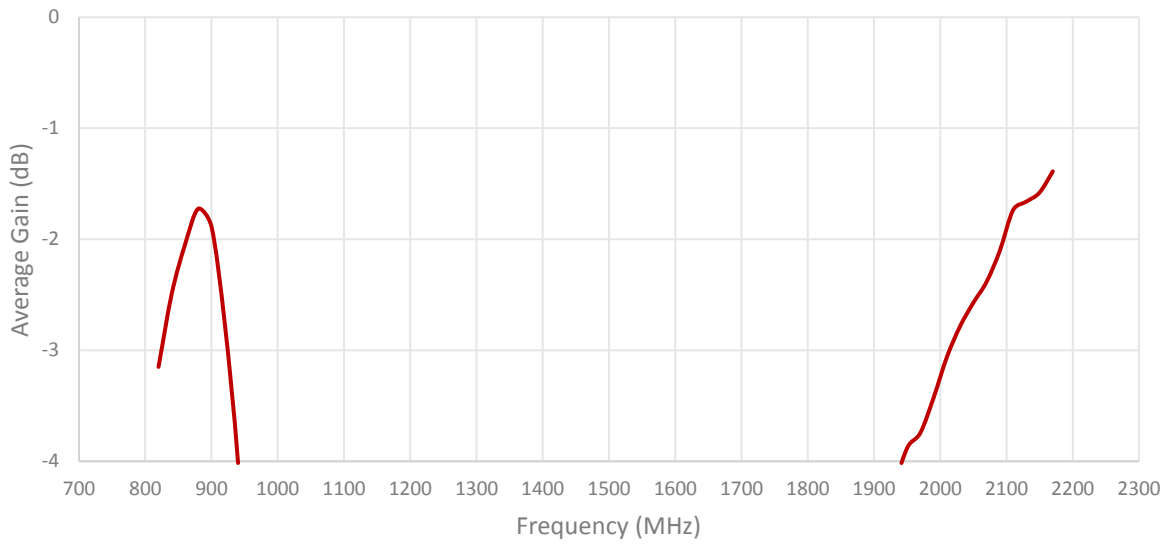


Radiation pattern reference

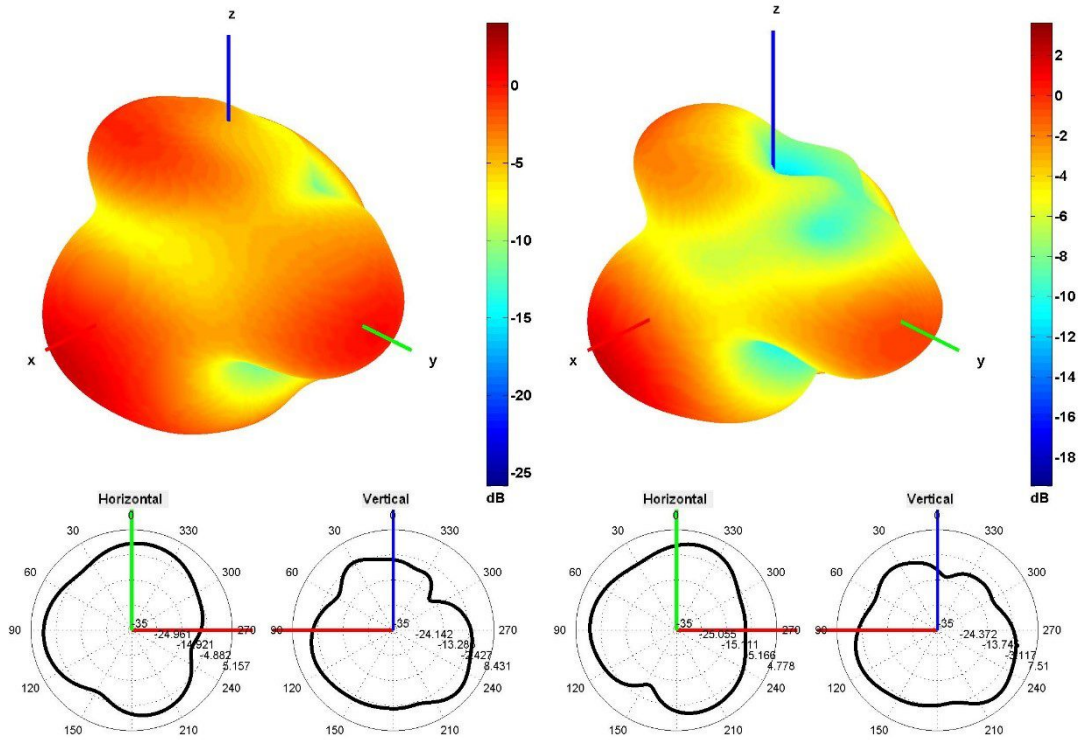

860 and 920 MHz Radiation pattern

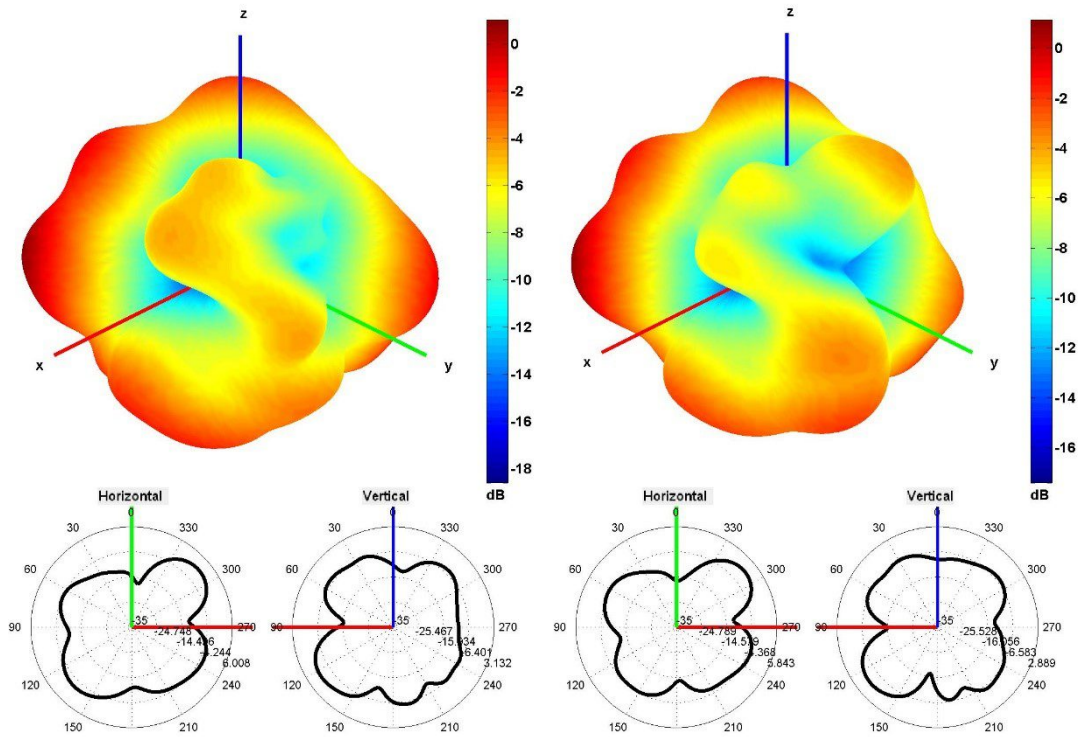


1750 and 1850 MHz Radiation pattern

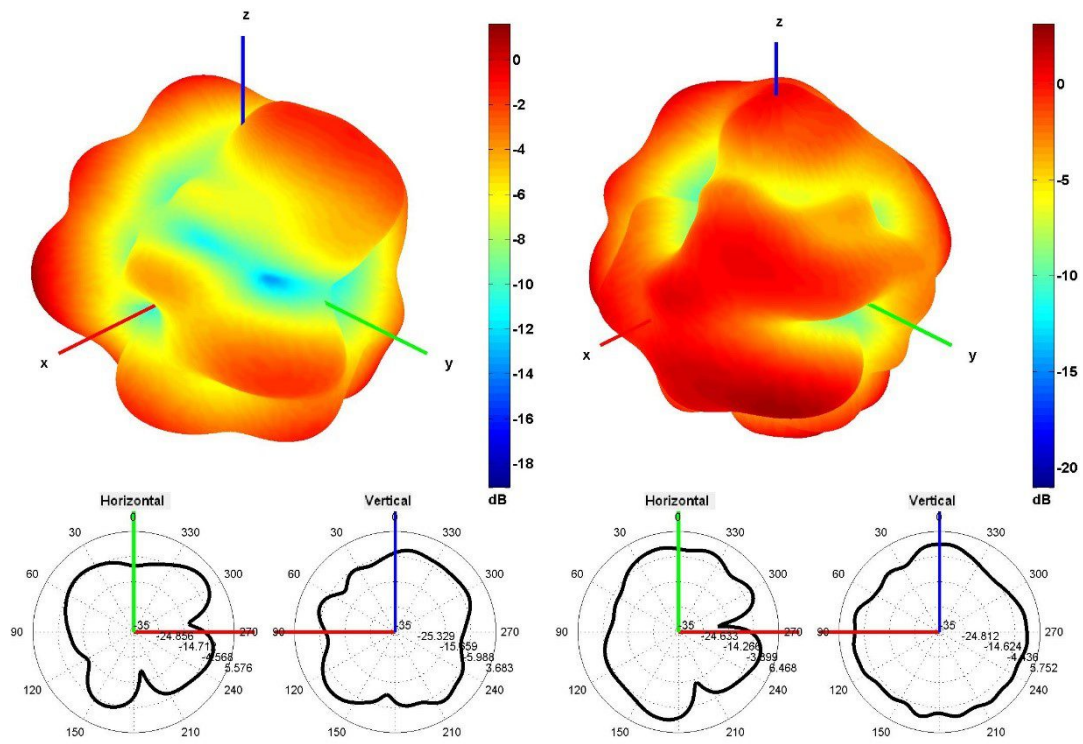

1950 and 2110 MHz Radiation pattern

4. Antenna drawings

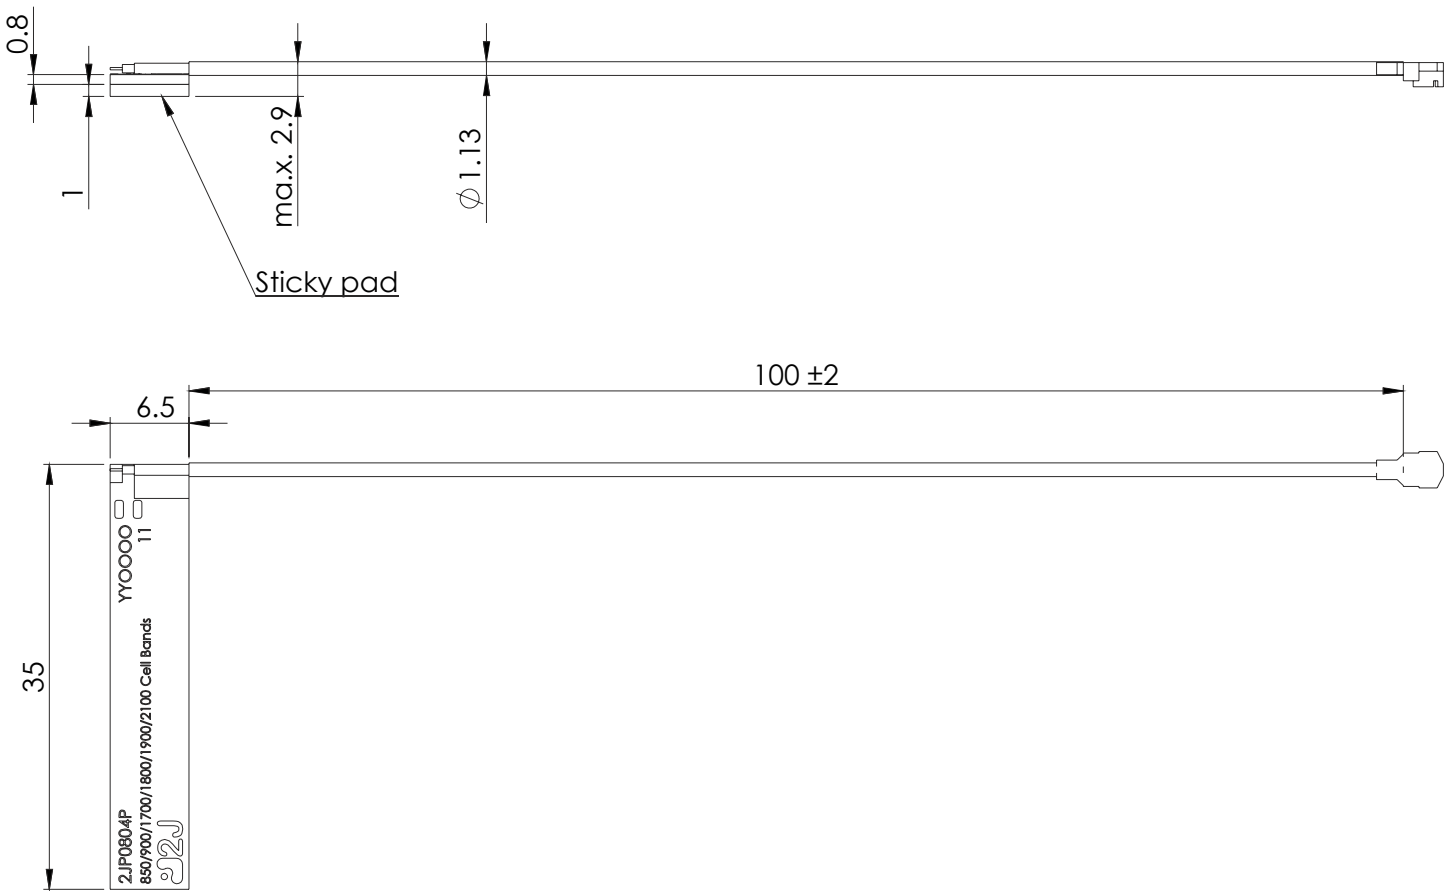

5. Antenna Images

