

P/N: MR160

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: MR160

Release:

Commit: 42566

Language:

Modified: 2017-05-09

Formatted: 2017-05-09

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



| | |
|--|---|
| FLIR MR160: Imaging Moisture Meter | |
| Part number | MR160 |
| Part name | Imaging Moisture Meter with IGM |
| <p>The FLIR MR160 Imaging Moisture Meter is the first of its kind. Equipped with a built-in thermal camera, the FLIR MR160 is the only moisture meter with the power to show you exactly where to measure. Featuring Infrared Guided Measurement (IGM) technology, the FLIR MR160 helps you quickly scan and target moisture issues, visually guiding you to the spot where you can confidently take measurements and analyze readings.</p> <p>An integrated pinless sensor and an external pin probe provide the flexibility to take either intrusive or non-intrusive measurements. Built tough with an industry-leading warranty, the FLIR MR160 can serve as your go-to troubleshooting tool right out of the box—or as the perfect complement to any high-resolution thermal camera you already own—helping you find hidden moisture issues and capture reliable data more efficiently.</p> | |
| <p>Identify and verify with one tool—the first-ever thermal imaging moisture meter:</p> <ul style="list-style-type: none"> • 80 × 60 Lepton thermal imager powers IGM technology. • Document thermal images and moisture readings on one screen. • Review images and generate reports with free FLIR Tools software. | |
| <p>Troubleshoot quickly—easily investigate insulation and moisture issues:</p> <ul style="list-style-type: none"> • Pinless technology for fast non-intrusive measurements. • External pin probe included for contact moisture measurements. • Easy targeting with the laser pointer and display cross-hairs. | |
| <p>Portable, tough and durable—drop-tested rugged design:</p> <ul style="list-style-type: none"> • Industry-leading warranty. • Small form factor to conveniently carry with you. • Internal rechargeable battery with USB. | |
| Thermal imaging | |
| Imaging detector | FLIR Lepton, microbolometer focal plane array |
| Shutter | Integrated automatic shutter for auto flat field correction |
| Thermal image resolution (H × W) | 4800 pixels (80 × 60) |
| Spectral response | 8–14 μm |
| Field of view (horizontal × vertical) | 51° × 38° |
| Upper scene range | 127°C (260°F, 400 K) |
| Sensitivity | <150 mK |



FLIR MR160

P/N: MR160

© 2017, FLIR Systems, Inc.

#MR160; r. /42566;

| | |
|--|--|
| Thermal imaging | |
| Image update speed frequency | 9 Hz |
| Thermal image palettes | Ice |
| Thermal image minimum focus distance | 10 cm (4") |
| Moisture measurement | |
| Pin moisture via external probe range (accuracy) | 0–100% WME ± 5% |
| Pin moisture groups | 9 material groups |
| Pinless moisture range | 0–100 relative measurement |
| Pinless moisture depth | 1.9 cm (0.75") maximum |
| Sample rate | 10 Hz (approximate, both modes) |
| Measurement resolution | 0.1 |
| Response time—pinless | 100 ms |
| Response time—pin mode | 750 ms |
| General information | |
| Display type (W × H) | QVGA (320 × 240 pixels), 2.3", 64 000 color, TFT graphical display |
| Warranty | 2 years product, 10 years thermal imaging detector |
| Saved image file format | BMP with measurement values overlaid |
| Stored image capacity | 9999 images |
| Internal memory | 4 GB |
| Laser | |
| Type | Visible class 2 |
| Orientation | Single laser pointer to center of thermal image |
| Power output | 1.0 mW (maximum) |
| Wavelength | 650 ± 20 nm |
| Certifications | |
| Certification standards | EN61326 (EMC), EN61010 (battery, charger), EN60825-1 Class 2 (laser) |
| Agency approvals | CE, FCC Class B, RCM |
| Power system | |
| Power requirements | Integrated rechargeable battery |
| Continuous run time | 18 hours maximum |
| Typical usage | 4 work weeks |
| Auto power off | Programmable: off, 1, 5, or 20 minutes |
| Power adapter | 100–240 V input/ 5 V 1 A output |
| Battery | 3.7 V, 3000 mAh Li ion rechargeable via micro USB |
| Environmental specifications | |
| Drop test | 3 m (9.8') |
| IP rating | IP54 dust-protected and splash-resistant |
| Operating temperature | 0–50°C (32–122°F) |
| Storage temperature | –10 to +60°C (+14 to +140°F) |



FLIR MR160


P/N: MR160

© 2017, FLIR Systems, Inc.

#MR160; r. /42566;

| Environmental specifications | |
|--------------------------------------|--|
| Operating humidity | ≤90%, 0–30°C (32–86°F) ≤ 75%, 30–40°C (86–104°F) ≤ 45%, 40–50°C (104–122°F) |
| Storage humidity | 90% relative humidity |
| Meter physical data | |
| Weight: | 300 g (10.6 oz.) |
| Dimensions (H × W × L) | 14 cm × 7.2 cm × 4.2 cm (5.5" × 2.9" × 1.7") |
| Material | PC-ABS |
| Color | Gray, black |
| Shipping information | |
| Packaging type | Retail color box |
| Packaging contents | MR160, MR02 pin probe, quick start guide, international charger, warranty card, brochure cCard |
| Packaging weight | 0.91 kg |
| Packaging dimensions (L × W × H) | 12.1 cm × 14 cm × 33.1 cm |
| Inner carton quantity | 4 |
| Inner carton weight | 4.1 kg |
| Inner carton dimensions (L × W × H) | 26.7 cm × 61 cm × 15.9 cm |
| Master carton quantity | 12 |
| Master carton weight | 13.3 kg |
| Master carton dimensions (L × W × H) | 64 cm × 25.8 cm × 51.2 cm |
| EAN-13 | 0793950371602 |
| UPC-12 | 793950371602 |
| Country of origin | China |
| Tariff code | 9025805000 |
| Accessories | |
| MR10 | EVA Protective Case |
| MR05 | Impact Pin Probe |
| MR05-PINS1 | Replacement Pins for MR05 |
| MR05-PINS2 | Replacement Pins for MR05 (wide) |
| Technical support | |
| Website | http://support.flir.com |
| E-mail | TMSupport@flir.com |
| Phone | 855-499-3662 |
| Repairs | repair@flir.com |

© 2015, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited

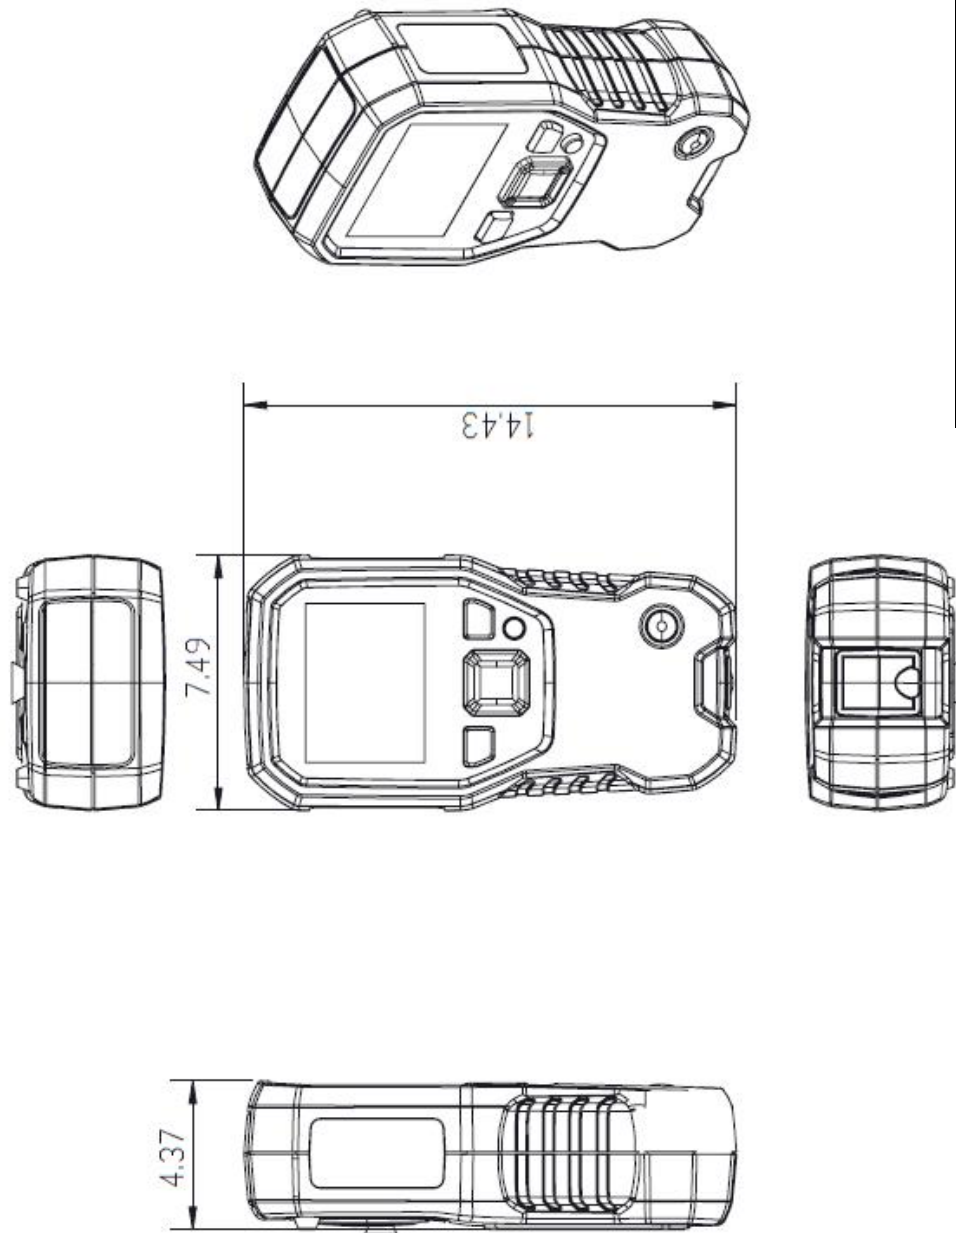

| Modified Date | Modified By |
|-----------------------------------|-----------------|
| Thursday, April 23, 2015 | T&M Engineering |
| Description | |
| FLIR MR160 Imaging Moisture Meter | |
| Units | Scale |
| Centimeters | Not to Scale |