


Item no.: 233-410
 Product description: PCB TERMINAL STRIP 2 SOLDER PINS / POLE 10 POLE
 PIN SPACING 2.54 MM / 0.1 IN

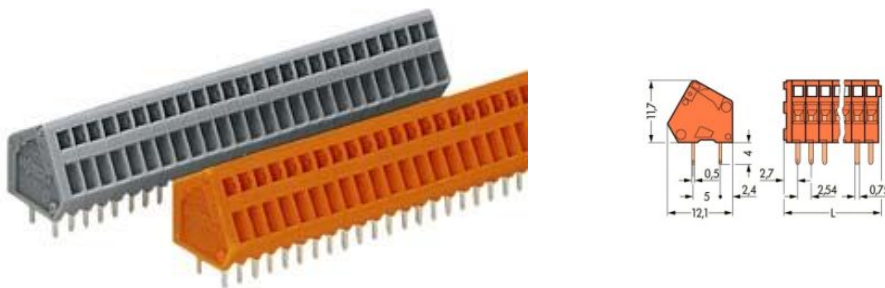

Produkt kann von Bild abweichen / product may differ

Packing unit 180 4*45 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	3.482 g
Color	orange
No. of connection Points	10
No. of potentials	10
pole count	10
Height	11.7 mm
Height	0.461 in
Width	27.7 mm
Width	1.091 in
Depth	12.1 mm
Depth	0.476 in
Pin spacing from	2.54 mm
Pin spacing from	0.1 in
Pollution degree	2
Measured voltage EN	160 V
Measured shock voltage	2.5 kV
Current intensity EN	6 A
Pollution degree	2

Measured voltage EN	320 V
Measured shock voltage	2.5 kV
Current intensity EN	6 A



Connection method	CAGE CLAMP® CONNECTION
Cross section [mm ²]	0.08 - 0.5 mm ²
Wiring method	solid
Cross section [mm ²]	0.08 - 0.5 mm ²
Cross section to [mm ²]	0.25 mm ²
Cross section to [mm ²]	0.25 mm ²
Cross section [AWG]	28 - 20 AWG
Strip length from	5 mm
Strip length to	6 mm
Material group	I



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
233-410	ABS	04-HG469925/1-PDA	250	4	0,08-0,5
233-410	BV	11915/A0	250	6	0,08-0,5
233-410	CSA	154112-1465035	150	4	28-20
233-410	DNV	E-9215	250	4	0,08-0,5
233-410	GL	17296-00HH	250	4	0,08-0,5
233-410	KEMA	90.6212.01/02	250	6	0,08-0,5
233-410	RMR	11130002	250	4	0,08-0,5
233-410	UR	E45172	150	4	18-28

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected