

Printview: 1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole - Item No.: 769-104/021-000



1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole

Item No.: 769-104/021-000



1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	769-104/021-000
GTIN / EAN	4044918481274
Content	1
Order amount	25
Customer item number	

Notes

Item description: According to EN 61984, pluggable connectors without current interrupting capacity shall not be mated and unmated when live or under load.

Technical data

Miscellaneous

Packaging type	BOX
Ratings per	IEC/EN 61984
Rated voltage (III / 3) [V]	500 [V]


Printview: 1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole - Item No.: 769-104/021-000

Technical data	
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>6 [kV]</i>
<i>Rated current [A]</i>	<i>32 [A]</i>
<i>Total number of potentials</i>	<i>4</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Number of connection points (connection type)</i>	<i>1</i>
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Nominal cross section</i>	<i>4 mm²</i>
<i>Solid conductor</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Fine-stranded conductor</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Strip length</i>	<i>8 ... 9 mm / 0.31 ... 0.35 Inch</i>
<i>Width</i>	<i>35.6 mm / 1.402 Inch</i>
<i>Height</i>	<i>45.2 mm / 1.78 Inch</i>
<i>Depth</i>	<i>18.3 mm / 0.72 Inch</i>
<i>No. of poles</i>	<i>4</i>
<i>Contact type (pluggable connector)</i>	<i>Female connector/socket</i>
<i>Connector connection type</i>	<i>for conductors</i>
<i>Total number of connection points</i>	<i>4</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Color</i>	<i>gray</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.263 [MJ]</i>
<i>RoHS Conformity</i>	<i>1</i>
<i>Weight [g]</i>	<i>14.358 [g]</i>

Printview: 1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole - Item No.: 769-104/021-000

Images & drawings

Printview: 1-conductor female plug; with lateral locking levers; only in combination with male connectors; codable; can be commoned with miniature adjacent jumpers; 4-pole - Item No.: 769-104/021-000

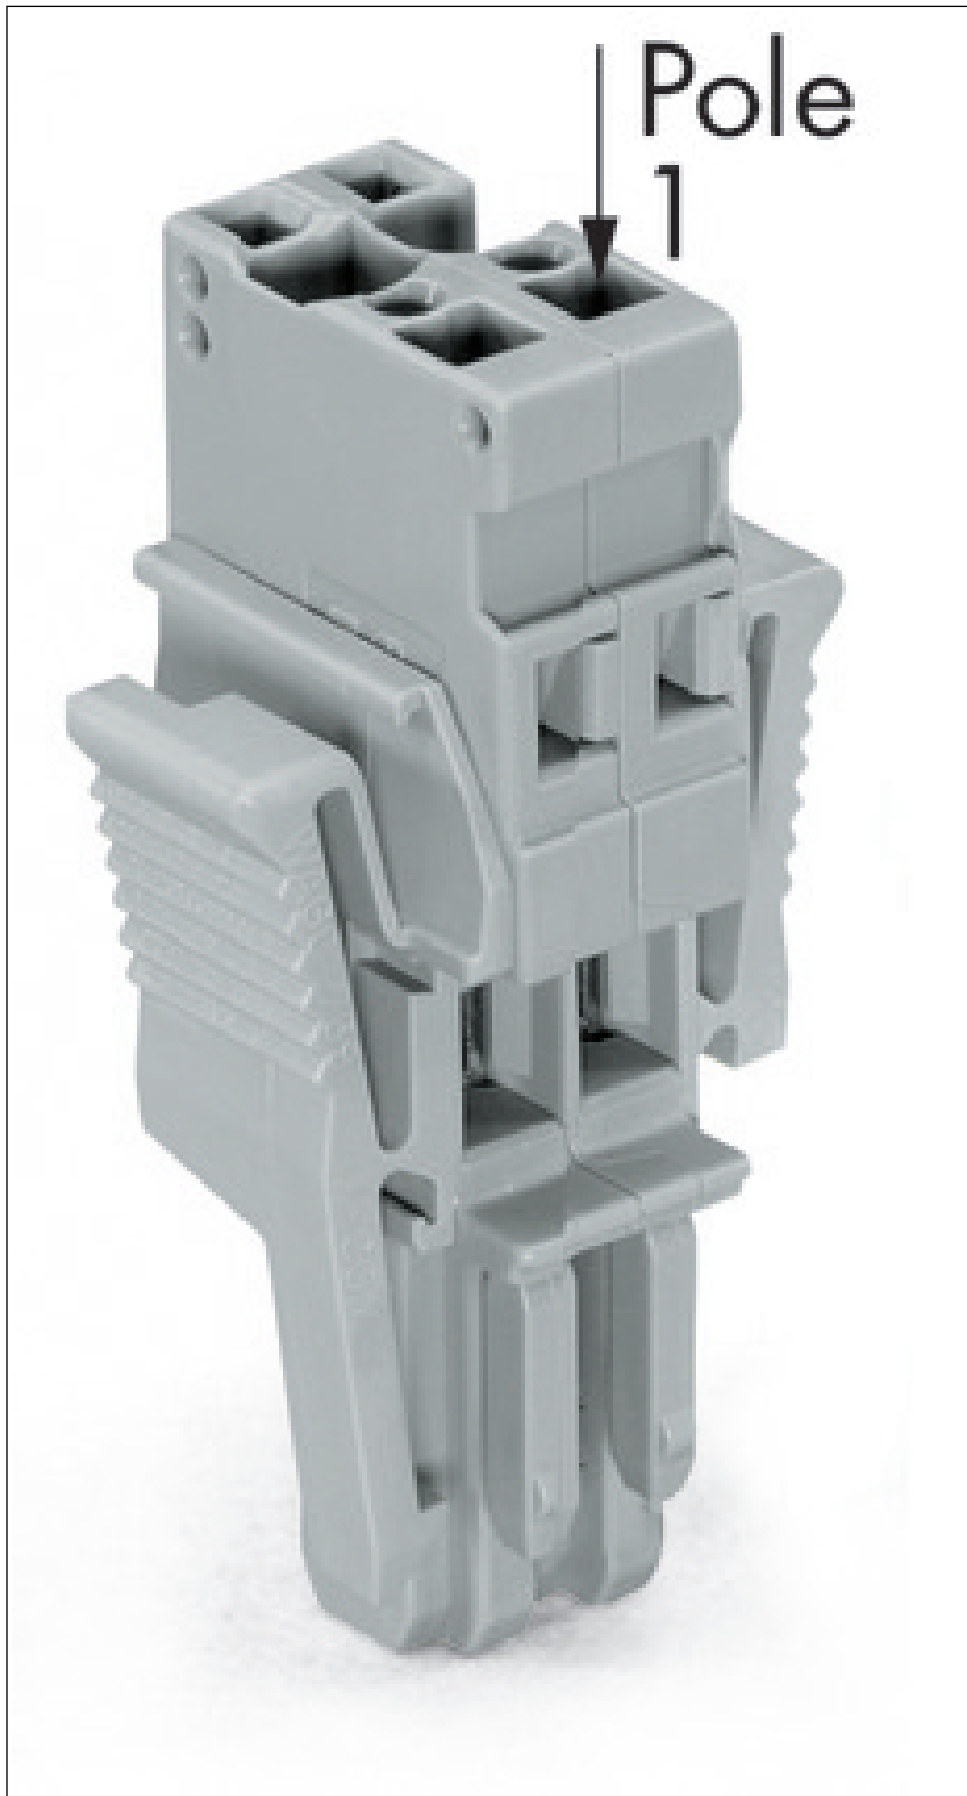

Printview: 1-conductor female plug; with lateral locking levers; only in combination with male connectors;
codable; can be commoned with miniature adjacent jumpers; 4-pole - Item No.: 769-104/021-000

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.