

Data sheet Product SLV W 3 SMD 048 4 G SM



PCB connectors>Male headers

one row expanded insulator 2-20 contacts, $\square$ 0.4 mm
matching for female header BLM

... packing (option) - additions:


SLV W 3 SMD ... SM: 4-20 contacts

Packaging options pick and place pad in bar magazine "... B SM" and pick and place pad in tape & reel "... B TR" on request.

Features

pitch:	1.27 mm
no. of contacts:	4
contact material:	CuZn-alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	• Ni+$\geq 0.2\mu\text{m}$ Au • Ni+4...6μm Sn
version:	male header
volume resistance:	$\leq 5 \text{ m}\Omega$
nominal current:	1.5 A
nominal voltage:	125 V AC
test voltage:	300 V
insulating body material:	PA 4.6. GF
temperature range:	• -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	$>10^7 \Omega \cdot \text{m}$
connection type:	SMD
reflow solderable:	yes
packing (optional):	bar magazine

Technical Drawing


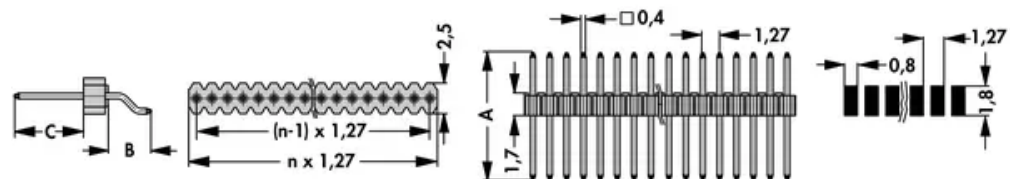


A: 9.5 mm

B: 3 mm

C: 4.8 mm

Equipping



Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de