


Supply module ► 24 VDC; fuse holder



750-601

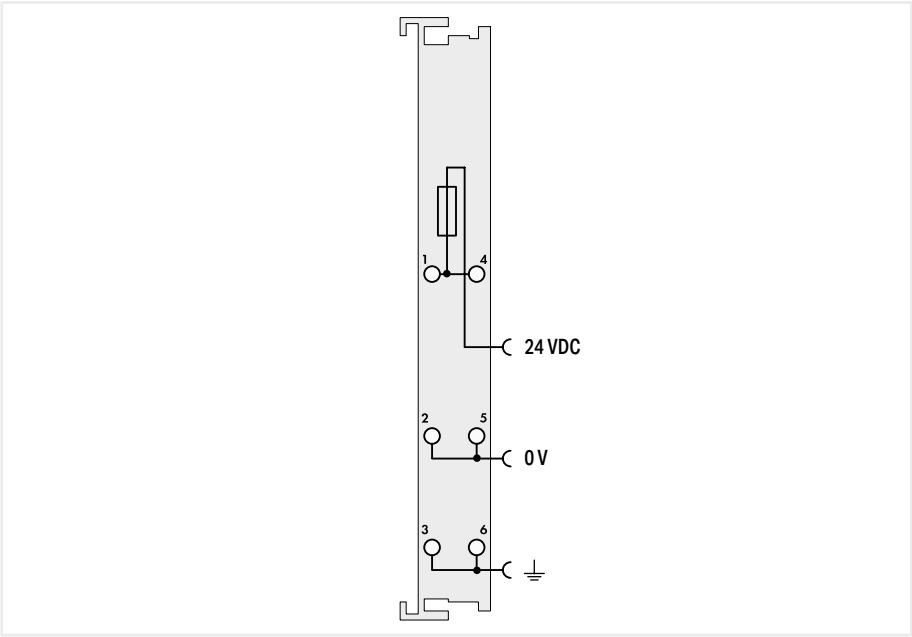

Item description
Version
Item no.
Order Text

Power Supply; 24 VDC; Fuse holder
Standard
750-601
Power Supply; 24 VDC

Technical data
Supply voltage (system)
Supply voltage (field)
Current carrying capacity (power jumper contacts)
Fuse
Ambient temperature (operation)
Dimensions W x H x D
Approvals
For data sheet and additional information, see:

5 VDC; via data contacts
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)
6.3 A
5 x 20; T 6.3 A (not included)
0 ... +55 °C
(12 x 100 x 69.8) mm
CE; Marine; OrdLoc/HazLoc; ATEX/IECEX
wago.com/750-601

This I/O module provides the applied supply voltage, protected by a fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED.