




UHF C1 Gen2 Tag

Uhf Flexible metal tag

U-10025

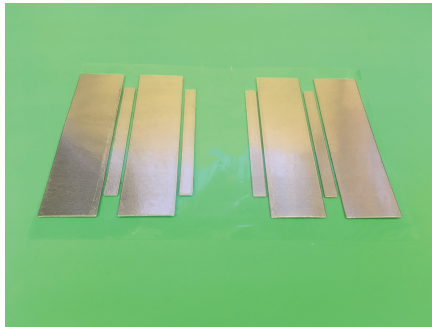

- *High performance reading range OVER 3M (on metal testing)
- *Available in high-yield volume with stable process.

Protocol & Memory

Protocol	EPC global C1G2/ISO 180000-6C
Mode of operation	Passive
Chip type	Higgs 3
Memory	32 bit kill passwords 32 bit access passwords Typical 96 bits EPC Number23

Structure

Frequency range	Global (860-960MHZ)
-----------------	---------------------

**Address: Unit B1, 3/F., Mai Shun Industrial Building,
18-24 Kwai Cheong Road, Kwai Chung ,
New Territories, Hong Kong.**
Phone: 0852- 27702330 Fax: 0852- 23886226



SUNBEST TECHNOLOGY CO.,LTD

Dimension:100x30x1mm

Operating temperature :-20C to +80C

Storage temperature :+25C to +85C

Material Aboserbo with PET inlay

ROHS yes

Reading range :over 3 m .(tag on metal ,base on ALR-9900 FIX reader .05w)

Application :Tracking management

Tools management

Metallic surface product tracking

Metal tank ,can ,pot control



*

**Address: Unit B1, 3/F., Mai Shun Industrial Building,
18-24 Kwai Cheong Road, Kwai Chung ,
New Territories, Hong Kong.**

Phone: 0852- 27702330 Fax: 0852- 23886226