







NOTE:

1.MATERIALS:


HOUSING—PBT OR PA46,WITH GLASS FIBER
UL 94V-0.STANDARD COLOR—BLACK
CONTACTS—PHOSPHOR BRONZE

2.FINISH:

CONTACTS: GOLD PLATED ON ENTIRE CONTACT
50u"MIN.NICKEL UNDERPLATED ALL OVER

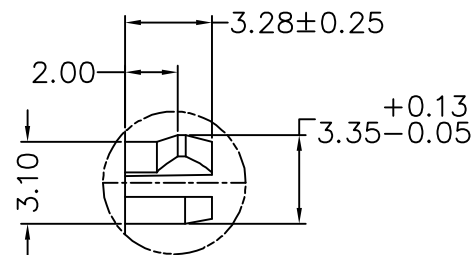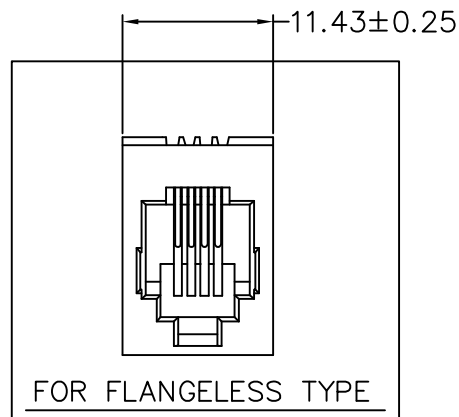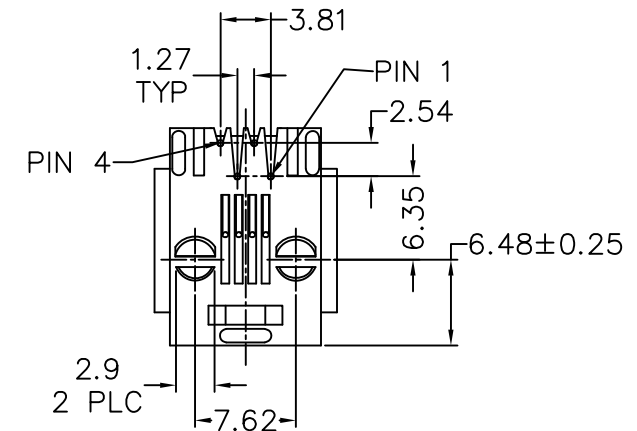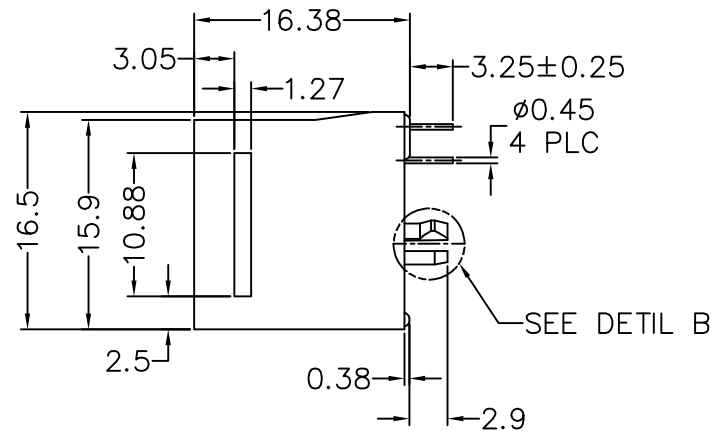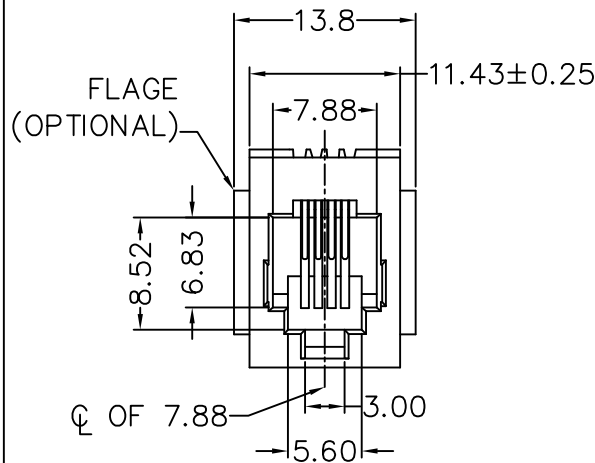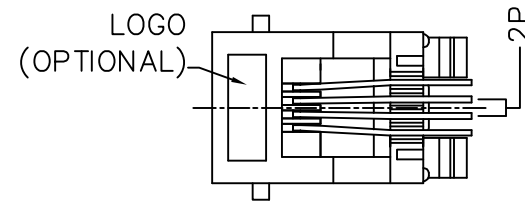

DETAIL B
(SCALE 2:1)

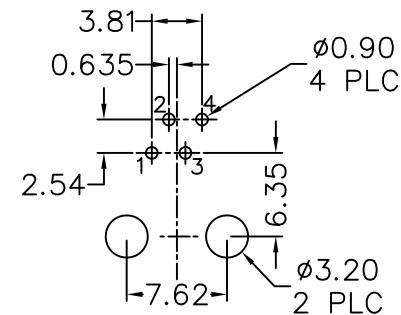

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THCKNESS:1.6mm
TOLERANCE:±0.05(TOP VIEW)

996-A 2-12 44 1 2
1 2 3 4 5 6

1. 1: Jack
- A: Jack (Green Product)
2. 2: Tray
3. 12: RJ11(9607)
4. 44: 4P4C
5. 1: Black Insulator
6. Pinrex internal code.

			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	±.30							
			.00	±.20							
			.000	±.XXX							
A	RELEASE	2014/07/23	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A		996-A2-124412	996-A2-124412