

Strip Block for Snap-in Mounting with up to 7 IEC Appliance Outlets F




Snap-In Version



Snap-In Version



Snap-In Version

**Description**

- Panel Mount:
Snap-in version from front side
- 2 Functions:
Module of 2 up to 7 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals

Characteristics

- Qualified for use in equipment according IEC/EN 60950

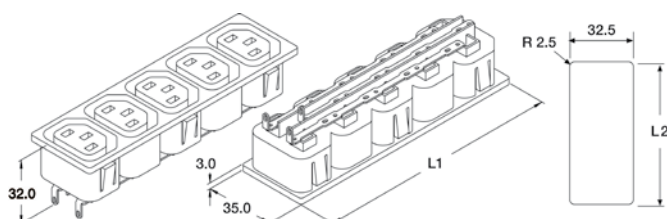
Other versions on request

- Other panel thickness

References
[General Product Information](#)
Weblinks
[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#),
[SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)
Technical Data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder terminals
Panel Thickness s	Snap-in 1.5 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class 1
------------------	---

Dimensions

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Panel Thickness s [mm]	Connector	Length L1 [mm]	Length L2 [mm]	Order Number
1.5	2	51.2	48.3	0909.0001
1.5	3	75.2	72.3	0909.0011
1.5	4	99.2	96.3	0909.0021
1.5	5	123.2	120.3	0909.0031
1.5	6	147.2	144.4	0909.0041
1.5	7	171.2	168.4	0909.0051

Packaging unit 120 Pcs

Accessories

Description



[Cord retaining kits](#)
Cord retaining strain relief

Flat head, Z	0888.0021
Countersunk, C	4700.0003

Mating Inlets/Plugs

Category / Description

[Interconnection Cord Overview complete](#)

Interconnection Cord with IEC Plug E, Angled	0607
Interconnection Cord with IEC Plug E, Angled	0608
Interconnection Cord with IEC Plug E, Straight	0609
Interconnection Cord with IEC Plug G, Angled	607B
Interconnection Cord with IEC Plug G, Angled	608B

[Interconnection Cord further types to 0909](#)

...

[Plug Overview complete](#)

IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009

[Plug further types to 0909](#)

...