


## Data sheet

777-648

## MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING TOPJOB-ENTRY CAGE CLAMP CONNECTION

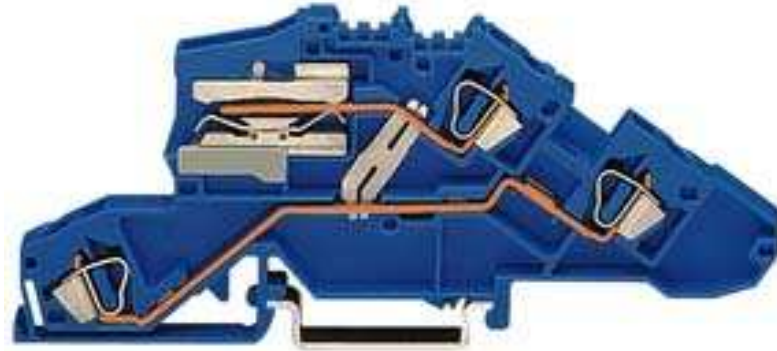

## Technical data

Package size 50 pieces.

Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	4 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage CSA	300 V
Current CSA	20 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	26 A
Weight	24.701 g
Color	blue
Wiring type	topJob
No. of connection Points	3
No. of potentials	2
Height	43.5 mm
Height	1.71 in
Width	6 mm
Width	0.236 in
Depth	118.5 mm
Depth	4.67 in
Strip length from	9 mm
Strip length to	10 mm

---

Data sheet

777-648

**MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING  
TOPJOB-ENTRY CAGE CLAMP CONNECTION**

---

Strip length

0.37 in

## Data sheet

777-648

### MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING TOPJOB-ENTRY CAGE CLAMP CONNECTION

---

Approval	Voltage	Current	Approval number	Notes
BBJ	400	26	B/12/698/03	
BV	400	26	07436/Co	
CCA	400	26	NL3063	
CSA	300	20	18677-44	
CSM	400	26	017956	
DEMKO	400		113344PD(75942)	
DNV	400	26	E6999	
GL	400	26	17295-00HH	
KEMA	400	26	98.2759.01	
LR	400	26	91/20112(E1)	
NEMKO	400		P94100800	
RMR	400	26	99.00007.250	
RosTesT	400	26	B09523	
RWTÜV	250/400	4	1657/97	

## Data sheet

777-648

### MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING TOPJOB-ENTRY CAGE CLAMP CONNECTION

Accessories	Item number
1-CONDUCTOR N-DISCONNECT TERMINAL BLOCK CENTRE MARKING	783-613
ADAPTER FOR WFB CONTINUOUS MARKING STRIPS FOR SNAP-IN FIXING INTO THE MARKER RECEPTACLE	209-185
ADJACENT JUMPER NOMINAL CURRENT 32 A	281-402
ADJACENT JUMPER NOMINAL CURRENT 32 A	281-422
ALTERNATE JUMPER NOMINAL CURRENT 24 A	281-409
ALUMINIUM CARRIER RAIL 35 X 7.5 MM, 1.5 MM / 0.059 IN THICK	210-196
BUSBAR CARRIER CAN REPLACE END BRACKET, WITH DETACHABLE SEPARATOR PLATE	777-305
BUSBAR CARRIER NOT SUITABLE FOR USE AS END STOP	777-321
CONNECTING TERMINAL FOR N-BUSBAR	209-105
CONNECTING TERMINAL FOR N-BUSBAR	210-281
COPPER CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-198
COVER FOR N-BUSBAR 1000 MM / 3' 3 IN LONG	777-303
END AND INTERMEDIATE PLATE 1.5 MM / 0.059 IN THICK	777-325
END MODULE MODULAR	249-145
Individual wire jumpers	individual jumper
INSULATION STOP 0.08 - 0.2 MM <sup>2</sup>	281-470
INSULATION STOP 0.25 - 0.5 MM <sup>2</sup>	281-471
INSULATION STOP 0.25 - 1.5 MM <sup>2</sup>	281-472
LOCK OUT TO PREVENT RECLOSING OF SLIDE LINK	777-300
MODULAR TEST PLUG ADAPTER MODULE WIDTH 6 MM / 0.236 IN	281-418
N-BUSBAR ZINC-PLATED	210-133
Open individual wire jumpers ends	individual jumper open end
OPERATING STICKER FOR TOPJOB DISCONNECT TERMINAL BLOCKS	210-370
PIVOTABLE GROUP MARKER CARRIER	249-105
PROTECTIVE WARNING MARKER WITH HIGH VOLTAGE SYMBOL, BLACK	281-415
PUSH-IN TYPE WIRE JUMPERS L = 180 MM/7.087 IN	249-123
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 110 MM / 4.331 IN	249-126
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 250 MM / 9.843 IN	249-127
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 60 MM / 2.362 IN	249-125
REDUCING TEST PLUG 4 MM SOCKET TO 2 MM PLUG	210-297
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019 IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019 IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SCREWLESS END STOP 10 MM / 0.394 IN WIDE	249-117
SCREWLESS END STOP 6 MM / 0.236 IN WIDE	249-116
SPACER MODULE MODULAR	249-146

## Data sheet

777-648

### MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING TOPJOB-ENTRY CAGE CLAMP CONNECTION

---

SPACER MODULE MODULAR	249-148
SPACER MODULE MODULE WIDTH 6 MM / 0.236 IN	281-419
STAGGERED JUMPER FROM 1 TO 2	781-452
STAGGERED JUMPER FROM 1 TO 3	781-453
STAGGERED JUMPER FROM 1 TO 4	781-454
STAGGERED JUMPER FROM 1 TO 5	781-455
STAGGERED JUMPER FROM 1 TO 6	781-456
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-114
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-197
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-506
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-508
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-118
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-548
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-112
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-113
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-162
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-229
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-504
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-505
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137
TEST PLUG 6 MM / 0.236 IN WIDE	281-407
TEST PLUG ADAPTER 5 MM / 0.197 IN WIDE	280-404
TEST PLUG ADAPTER MODULE MODULAR	249-144
TEST PLUG ADAPTER MODULE MODULAR	249-147
TEST PLUG FOR TEST PLUG 4 MM / 0.157 IN Ø	209-170
TOPJOB TOOL SPECIALLY DESIGNED BLADE	777-310
WCB COMBI MARKING SYSTEM PLAIN	249-200
WFB CONTINUOUS MARKING STRIPS FOR SELF-MARKING	210-612
WMB MULTI MARKING SYSTEM PLAIN	793-501
WMB MULTI MARKING SYSTEM PLAIN	793-5501
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-006
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-005
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-002
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-007
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-012
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-017
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-023
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-024
WSB QUICK MARKING SYSTEM PLAIN	209-501
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-002

---

---

**Data sheet****777-648****MULTILEVEL INSTALLATION TERMINAL BLOCK CENTRE MARKING  
TOPJOB-ENTRY CAGE CLAMP CONNECTION**

---

WSB QUICK MARKING SYSTEM PLAIN	209-501/000-005
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-006
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-007
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-012
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-017
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-023
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-024