


REV	DESCRIPTION	AUTHOR	DATE
X1	在Y1RCHOHAOCA的基础上修改线长	Maxine	20260318

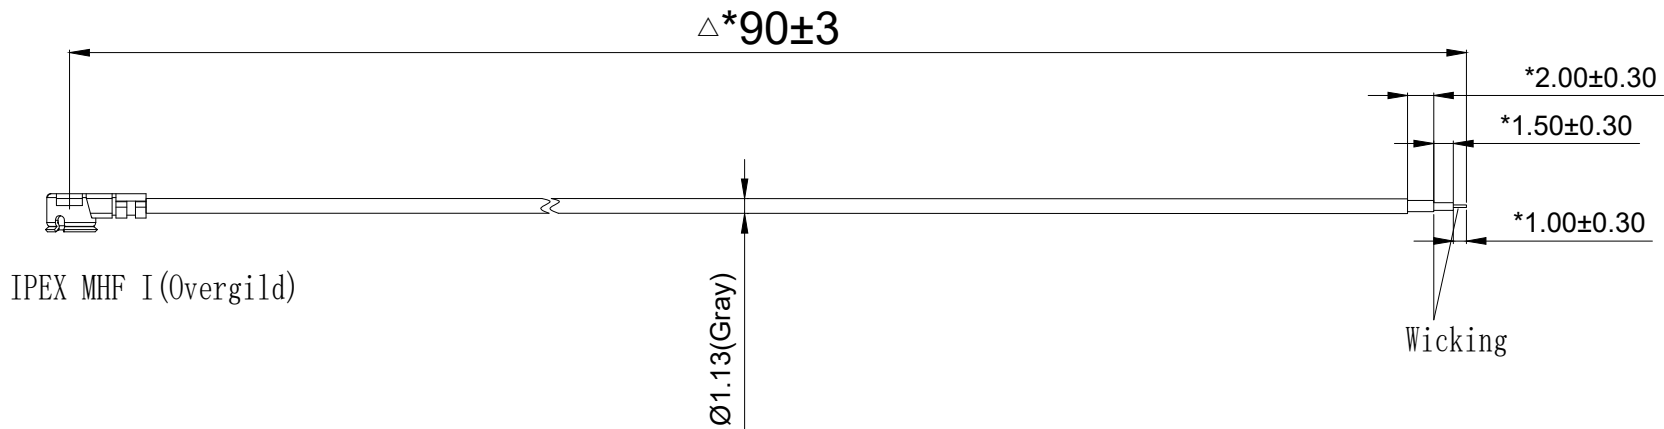

- Notes:
- *is the key dimension;
 - Connector: IPEX MHF I, Cable: Ø1.13 (Gray) ;
 - Impedance: 50Ω; Frequency range: DC-6GHz;
 - Working temperature: -40~+85°C;
Neutral salt spray test requirements≥48H;
 - Separation force of connector and cable: 15N Min;
 - Δ is CPK dimension, CPK≥1.33;
 - Short circuit, open circuit and are not allowed, 100% continuity test of outgoing line;
 - Appearance: refer to the appearance requirements of Quectel quality department;
 - The skin is not damaged, and the tin is even and full;
 - Comply with ROHS2.0 and REACH.

				上海移远通信技术有限公司		供应商规格		Part Name: Y1RCHOHAODA_Cable_R1		
Tolerance	0-10	±0.05	DRAWN	Maxine	Part No:			REV		
	10-30	±0.10	CHKD	Kenny						
	30-80	±0.15	APPD	Goden	Size			Scale		
	≥ 80	±0.20	DATE	20260318						
	Angle	±1°			mm			A4		
				1:1						