





|                   |      |               |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4%       | Yes  | Yes           |

more than you expect

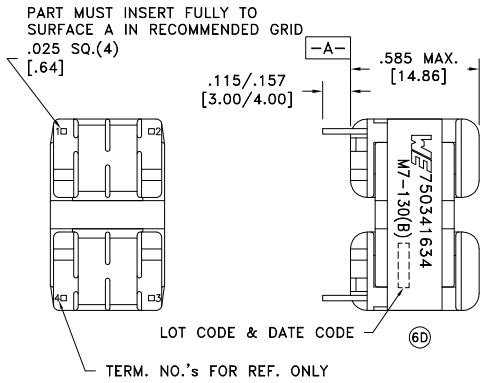

RECOMMENDED P.C. PATTERN, COMPONENT SIDE



Ⓒ ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER          | TEST CONDITIONS                     | VALUE             |
|--------------------|-------------------------------------|-------------------|
| D.C. RESISTANCE    | 1-2 @20°C                           | 0.510 ohms max.   |
| D.C. RESISTANCE    | 4-3 @20°C                           | 0.510 ohms max.   |
| INDUCTANCE         | 1-2 10kHz, 50mVAC, Ls               | 10.0mH +60%/-30%  |
| INDUCTANCE         | 4-3 10kHz, 50mVAC, Ls               | 10.0mH +60%/-30%  |
| SATURATION CURRENT | tie(2+3), roll off 20% from initial | 3.0A              |
| LEAKAGE INDUCTANCE | 1-4 tie(2+3), 10kHz, 50mVAC, Ls     | 300uH min.        |
| DIELECTRIC         | 1-CORE tie(1+4), 1875VAC, 1 second  | 1500VAC, 1 minute |
| URNS RATIO         | (1-2):(4-3)                         | 1:1, ±2%          |

GENERAL SPECIFICATIONS:


OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to meet UL Recognized Insulation System M7-130(B), E106391.

Current Rating: 1.00A

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

|      |       |                                       |
|------|-------|---------------------------------------|
| REV. | DATE  | Packaging Specifications              |
| 6D   | 3/15  | Method: Tray                          |
| 6C   | 10/13 | PKG-0822                              |
| 6B   | 6/13  | www.we-online.com/midcom              |
| 6A   | 5/13  | SEE REVISION SHEET FOR REVISION LEVEL |



Tolerances unless otherwise specified:  
Angles: ±1° Decimals: ±.005 [.13]  
Fractions: ±1/64 Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**CMC**

eiSos p/n: 750341634



PART NO.

**750341634**

SPECIFICATION SHEET 1 OF 2

6D/6B